
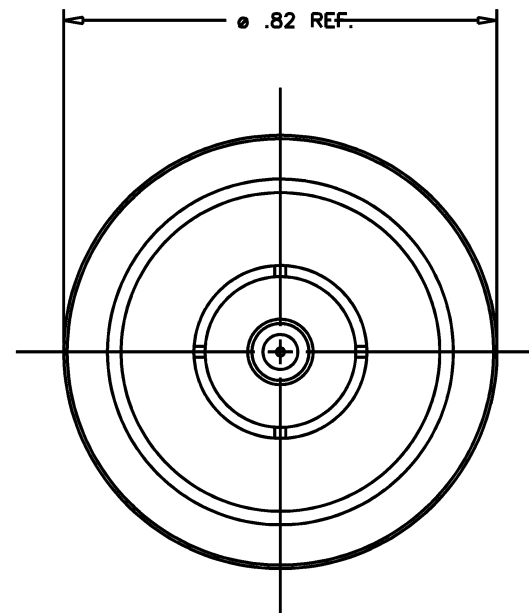


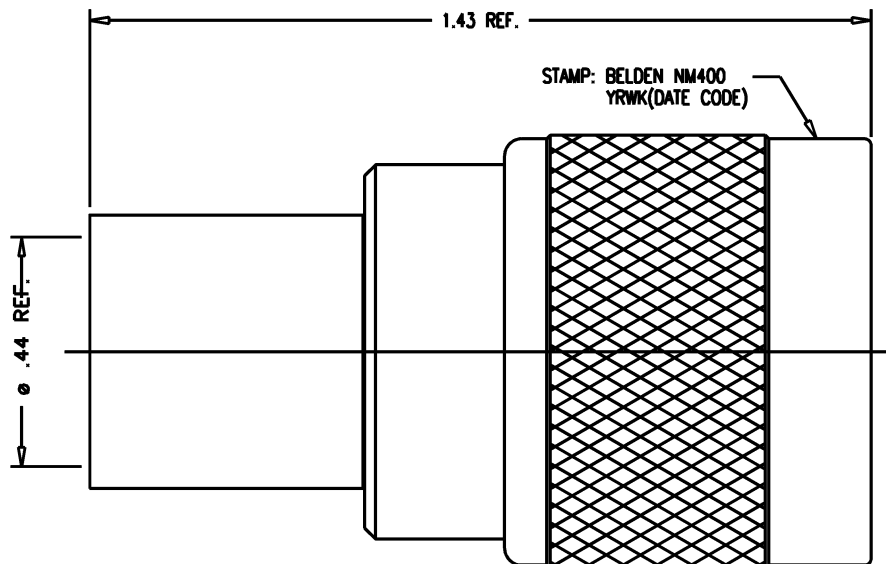

NOTES:

1. FOR USE WITH BELDEN 9913, RF400 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-781.
3. FOR CRIMPING USE DIE CD400 OR KTH-2286.
4. INTERFACE PER MIL-STD-348, FIG. 304-1.
5. CENTER CONTACT SUPPLIED UNASSEMBLED.
6. MATERIALS:  
 INSULATOR: TEFLON, ASTM-D4894  
 K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B135.  
 GASKETS: SILICONE RUBBER, A-A-59588  
 OUTER CONTACT } PHOSPHOR BRONZE, ASTM-B140.  
 C-RING }  
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
7. FINISHES:  
 CENTER CONTACT GOLD PLATE, ASTM-B488.  
 OUTER CONTACT SILVER PLATE, ASTM-B700.  
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
8. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 WORKING VOLTAGE: 1000 VRMS  
 FREQUENCY RANGE: DC TO 11 GHz

GSD

GSD

1205-4-7

| REVISIONS |                                      |
|-----------|--------------------------------------|
| ISSUE     | CHANGES                              |
| 3         | CN 35302 C<br>REDRAWN<br>KH 02/18/94 |
| 4         | CN 37266 C<br>PB 13 FEB 97           |
| 5         | CN 39971 C<br>DRK 06/18/07           |

|                                  |               |
|----------------------------------|---------------|
| SCALE 4:1                        |               |
| APPROX SURFACE AREA              |               |
| BELDEN ONLY                      |               |
| USED ON                          |               |
| REF: E-12343                     |               |
| PLUG, N                          |               |
| DRAWN KH                         | DATE 02/18/94 |
| DESIGN LI                        | DATE 02/22/94 |
| APPR.                            | DATE          |
| A Winchester Electronics Company |               |
| 1205-4-7                         |               |