



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
 - A. 600V MAX. VOLTAGE RATING.
 - B. 221°F (105°C) MAX. TEMP. RATING (CSA).
 - C. 257°F (125°C) MAX. TEMP. RATING (UL).
 - D. STRANDED COPPER WIRE ONLY.
2. DNF10-250F1B-2K IS RATED FOR 257°F (125°C) BY UL & CSA
3. PACKAGE QTY: 3K=3000 PIECES, 2K=2000 PIECES CONTINUOUS MOLDED STRIP CARRIER
4. MATERIAL:
 - A. STAMPING-CDA 260 BRASS, TIN PLATED
 - B. HOUSING-TYPE 66 NYLON
5. DIMENSIONS IN BRACKETS ARE IN mm OR mm²
6. COLORS ARE TRANSLUCENT

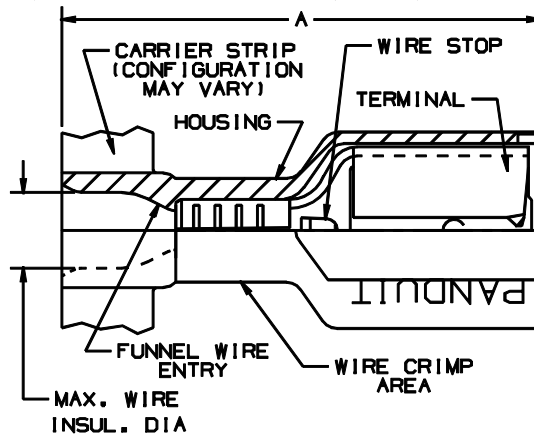

LISTED
20H3
E78522



CERTIFIED
LR31212

TOOL CHART
RECOMMENDED PRESSES:
CP-851, CP-860, CP-861

PART NUMBER	TAB SIZE	WIRE RANGE AWG (mm ²)	COLOR (note 6)	MAX. INSUL.	DIMENSIONS in.			STRIP LENGTH +1/32 (10.8) -0	CA-800 APPLICATOR DIES
					A ±.03 (1.8)	B ±.02 (1.5)	C ±.02 (1.5)		
DNF18-250F1B-3K	.250 X .032 (6.3 X 0.8)	22-18 (1.5-1.5)	RED	.136 (3.45)	.84 (21.3)	.35 (8.9)	.22 (5.6)	9/32 (7.1)	CD-800-4
DNF18-205F1B-3K	.205/.187 X .032 (5.2/4.8 X 0.8)	22-18 (1.5-1.5)	RED	.136 (3.45)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF18-208F1B-3K	.205/.187 X .020 (5.2/4.8 X 0.5)	22-18 (1.5-1.5)	RED	.136 (3.45)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF18-187F1B-3K	.187 X .032 (4.8 X 0.8)	22-18 (1.5-1.5)	RED	.136 (3.45)	.78 (19.8)	.29 (7.4)	.16 (4.1)	"	
DNF18-188F1B-3K	.187 X .020 (4.8 X 0.5)	22-18 (1.5-1.5)	RED	.136 (3.45)	.78 (19.8)	.29 (7.4)	.16 (4.1)	"	
DNF14-250F1B-3K	.250 X .032 (6.3 X 0.8)	18-14 (1.5-2.5)	BLUE	.160 (4.06)	.84 (21.3)	.35 (8.9)	.22 (5.6)	"	CD-800-5
DNF14-205F1B-3K	.205/.187 X .032 (5.2/4.8 X 0.8)	18-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF14-208F1B-3K	.205/.187 X .020 (5.2/4.8 X 0.5)	18-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF14-187F1B-3K	.187 X .032 (4.8 X 0.8)	18-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.29 (7.4)	.18 (4.6)	"	
DNF14-188F1B-3K	.187 X .020 (4.8 X 0.5)	18-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.29 (7.4)	.18 (4.6)	"	
DNF10-250F1B-2K	.250 X .032 (6.3 X 0.8)	12-10 (2.5-6.0)	YELLOW	.220 (5.59)	.96 (24.4)	.35 (8.9)	.23 (5.8)	3/8 (9.5)	CD-800-13

* ALSO APPROVED FOR USE WITH (2) # 16 (1.5) WIRES

A41165_09

09		MS		ADDED NOTCHES TO HOUSING				<p>TINLEY PARK, ILLINOIS</p> <p>REELSMART™ DISCO-FULLY INSULATED FEMALE DISCONNECTS .250 X .032, .205 X .032/.020, .187 X .032/.020</p>
08	7/97	TM	RS	ADDED 187& 188 PARTS	06106	LA	DBH	
07	4/95	MS	RS	ADDED NOTE TO SLOTS	03185	LA	KS	
06	10/94	TH	RS	UPDATED NOTES AND DIMENSIONS	02548	LA	TKE	
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	
								CHK'D SCALE NONE
								DRAWING NO. A41165