


GSD

M39012/20-0503

REVISIONS

ISSUE	CHANGES
10	CN 34436 C REDRAWN JCA 02/16/93
11	CN 35406 A MJB 03/10/94

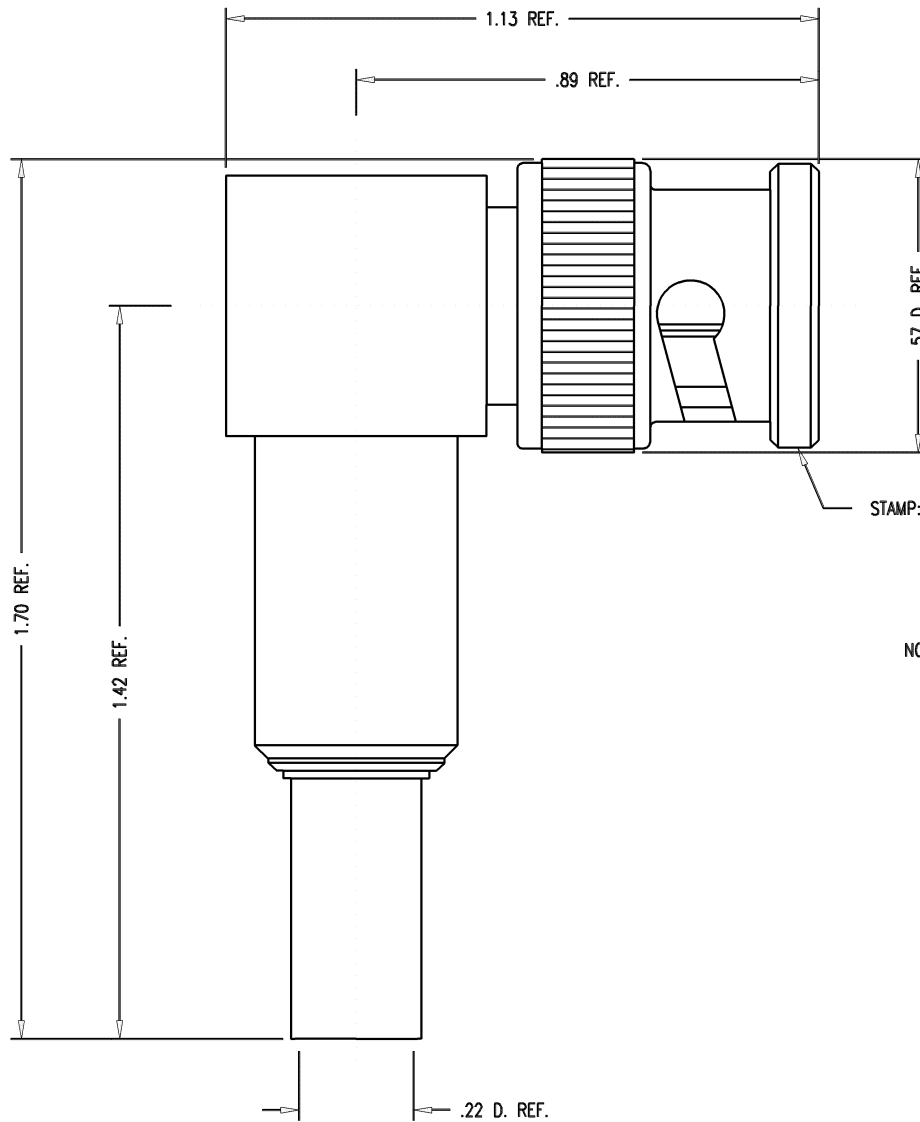

STAMP: 91836 M39012/20-0503
KC-59-419 XXXX (DATE CODE)

NOTES:

1. FOR USE WITH RG-142, 223 AND 400/U CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-465.
3. FOR CABLE TRIMMING USE KTJ-113 AND KTD-166.
4. FOR CRIMPING USE DIE KTH-2001.
5. INTERFACE PER MIL-STD-348, FIG. 310-1.
6. MATERIALS:
 INSULATORS-TEFLON, ASTM-D-1457
 GASKET-SILICONE RUBBER, ZZ-R-765
 SPRING WASHER }
 CENTER CONTACT } BER. COP., ASTM-B-196
 OUTER CONTACT }
 ALL OTHER METAL PARTS-BRASS, ASTM-B16
7. FINISHES:
 CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
 ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
8. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE-50 OHMS
 WORKING VOLTAGE-500 VRMS
 FREQUENCY RANGE-DC TO 4 GHz

JCA3540

SCALE 4:1	
APPROX SURFACE AREA	
KC-59-419	
USED ON	
REF:	
PLUG, ANGLE, BNC	
DRAWN JCA	DATE 02/16/93
DESIGN MJB	DATE 02/17/93
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M39012/20-0503

GSD