

**ZTR2.5-DR-ZS**

- 3 Connections



Phoenix Mecano Brand



**Technical Data**

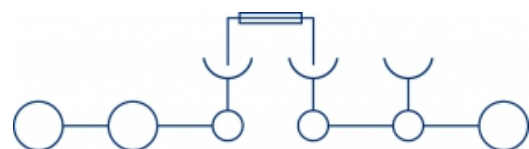
Wire sizes		Insulating Material	
Solid min	0.5 mm <sup>2</sup>	Material	PA 6.6
Solid max	4.0 mm <sup>2</sup>	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.5mm <sup>2</sup>	Temperatures	
Stranded (flexible) max	4.0 mm <sup>2</sup>	Working Temperature	-40 - 120 °C
Stranded with Ferrule min	0.5 mm <sup>2</sup>	Dimensions	
Stranded with Ferrule max	2.5 mm <sup>2</sup>	Width	5.1 mm
		Length	80.2 mm
		Height TS35 x 7.5	78.7 mm

**Electrical Data****General**

Cross Connection Channels	1
Test Pick off	2
Fuse Size	5x20
max. Power Loos on Fuse	1.6 W

**Colours**

	BEIGE, similar RAL 1019
	BLUE, similar RAL 5015

**Connection Diagram****Order Data**

Article Designation	Article Number	PU
ZTR2.5-DR-ZS-BEIGE	43621.2	100
ZTR2.5-DR-ZS-BLUE	43621.5	100

**Accessoires**

Article Designation	Article Number	PU
End Plate ZAPT2.5/3A	493797.2	20
Cross-Connection insulated ZQI2.5/2	493710.8	50
Cross-Connection insulated ZQI2.5/3	493711.8	50
Cross-Connection insulated ZQI2.5/4	493712.8	20
Cross-Connection insulated ZQI2.5/5	493713.8	20
Cross-Connection insulated ZQI2.5/6	493714.8	20
Cross-Connection insulated ZQI2.5/7	493715.8	20
Cross-Connection insulated ZQI2.5/8	493716.8	10
Cross-Connection insulated ZQI2.5/9	493717.8	10
Cross-Connection insulated ZQI2.5/10	493718.8	10
Cross-Connection insulated ZQI2.5/0.5/99	493719.8	1
Four-Way Covers ZAD2.5/4/B	493706.0	20
End Stopn ZES35	493748.2	50
Test Adapter ZTA2.5	493740.2	10
Fuse Plug/- Holder ZS/H0/ZTR	493635.2	20
Fuse Plug/- Holder ZS/H1/ZTR/36	493631.2	20
Fuse Plug/- Holder ZS/H2/ZTR/70	493632.2	20
Fuse Plug/- Holder ZS/H3/ZTR/150	493633.2	20
Fuse Plug/- Holder ZS/H4/ZTR/250	493634.2	20
Micro-Fuse/G-Fuse Cartridges 6.3x32 imperial 440 V / 500 V / fast-acting SIF6.3x32-10A	494989.0	10
Car Fuse SIC-1A-32V-BK	494991.0	100
Car Fuse SIC-2A-32V-GY	494992.0	100

More accessories see internet

**Ratings**

Ratings	IEC
Rated Voltage	400 V
Rated Current	6.3 A
Rated Wire Size	2.5 mm <sup>2</sup>
Rated Impulse Voltage	6 V
Pollution Degree	3