

MB81C4256A-60/-70/-80/-10

CMOS 256K X 4 BIT FAST PAGE MODE DYNAMIC RAM

CMOS 262,144 x 4 Bit Fast Page Mode DRAM

The Fujitsu MB81C4256A is a CMOS, fully decoded dynamic RAM organized as 262,144 words x 4 bits. The MB81C4256A has been designed for mainframe memories, buffer memories, and video image memories requiring high speed and high-bandwidth output with low power dissipation, as well as for memory systems of handheld computers which need very low power dissipation.

Fujitsu's advanced three-dimensional stacked capacitor cell technology gives the MB81C4256A high α -ray soft error immunity and extended refresh time.

CMOS technology is used in the peripheral circuits to provide low power dissipation and high speed operation.

Features


| Parameter | MB81C4256A-60 | MB81C4256A-70 | MB81C4256A-80 | MB81C4256A-10 |
|---------------------------|---|---------------|---------------|---------------|
| RAS Access Time | 60ns max. | 70ns max. | 80ns max. | 100ns max. |
| Random Cycle Time | 110ns min. | 125ns min. | 140ns min. | 170ns min. |
| Address Access Time | 30ns max. | 35ns max. | 40ns max. | 50ns max. |
| CAS Access Time | 15ns max. | 20ns max. | 20ns max. | 25ns max. |
| Fast Page Mode Cycle Time | 40ns min. | 45ns min. | 45ns min. | 55ns min. |
| Low Power Dissipation | 407mW max. | 374mW max. | 341mW max. | 297mW max. |
| • Operating current | 11mW max. (TTL level) / 5.5mW max. (CMOS level) | | | |
| • Standby current | | | | |

- 262,144 words x 4 bits organization
- Silicon gate, CMOS, 3D-Stacked Capacitor Cell
- All input and output are TTL compatible
- 512 refresh cycles every 8.2 ms
- Early write or \overline{OE} controlled write capability
- RAS only, \overline{CAS} -before-RAS, or Hidden Refresh
- Fast page Mode, Read-Modify-Write capacity
- On chip substrate bias generator for high performance

Absolute Maximum Ratings (See Note)

| Parameter | Symbol | Value | Unit |
|--|-------------------|-------------|------|
| Voltage at any pin relative to VSS | V_{IN}, V_{OUT} | -1 to +7 | V |
| Voltage of V_{CC} supply relative to VSS | V_{CC} | -1 to +7 | V |
| Power Dissipation | PD | 1.0 | W |
| Short Circuit Output Current | — | 50 | mA |
| Storage Temperature | T_{STG} | -55 to +125 | °C |


NOTE: Permanent device damage may occur if the above Absolute Maximum Ratings are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



DIP-20P-M03



LCC-26P-M04



ZIP-20P-M02



*FPT-24P-M04




*FPT-24P-M05

*: Available for 70/80/100ns versions.

This device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltage to this high impedance circuit.

1


Fig. 1 - MB81C4256A DYNAMIC RAM - BLOCK DIAGRAM

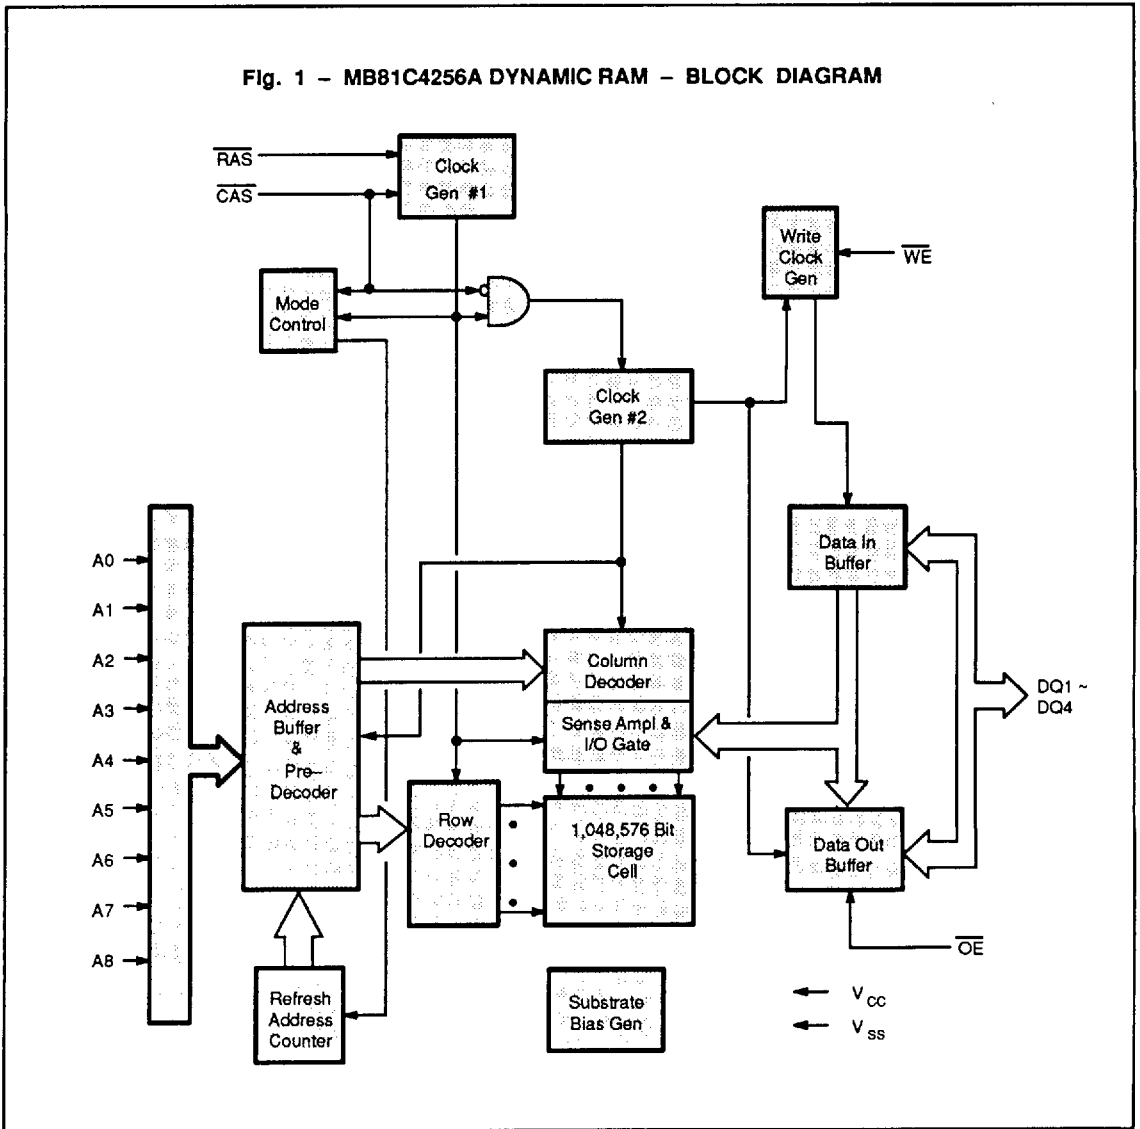

CAPACITANCE ($T_A = 25^\circ\text{C}$, $f = 1\text{MHz}$)

| Parameter | Symbol | Typ | Max | Unit |
|--|-----------|-----|-----|------|
| Input Capacitance, A0 to A8 | C_{IN1} | — | 5 | pF |
| Input Capacitance, $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$ | C_{IN2} | — | 5 | pF |
| Input/Output Capacitance, DQ1 to DQ4 | C_{DO} | — | 6 | pF |

PIN ASSIGNMENTS AND DESCRIPTIONS

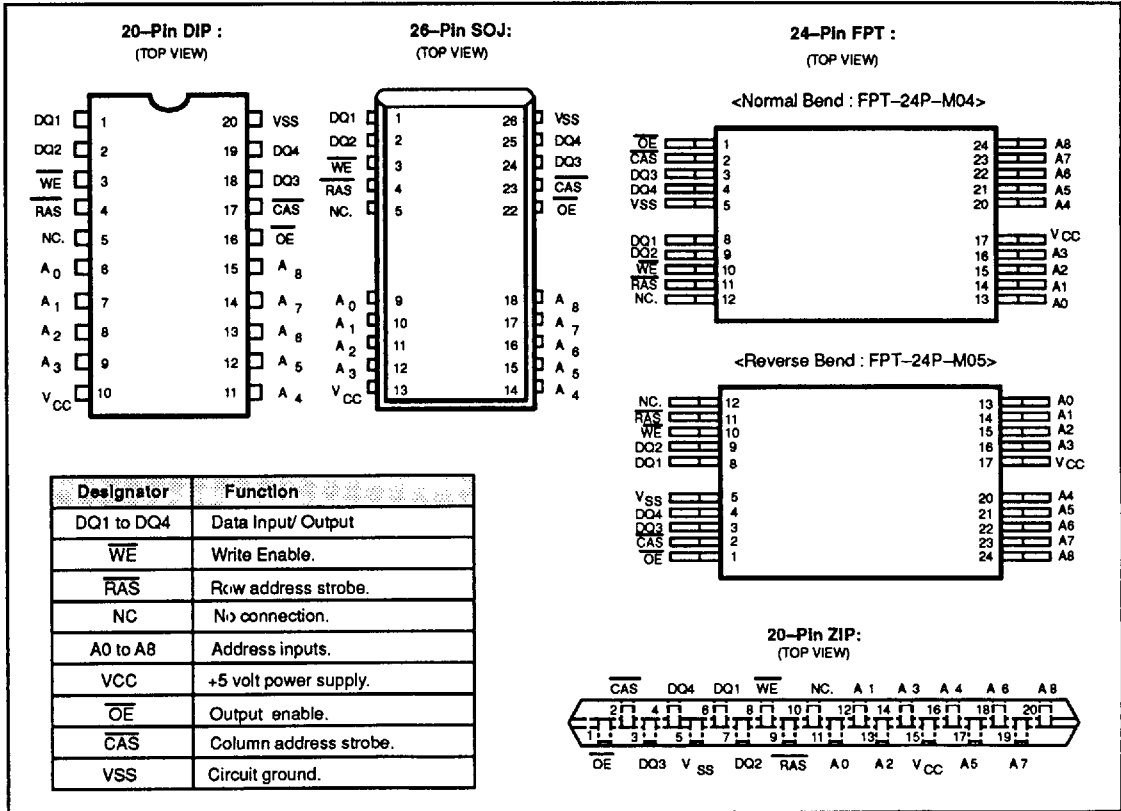

RECOMMENDED OPERATING CONDITIONS

| Parameter | Notes | Symbol | Min | Typ | Max | Unit | Ambient Operating Temp |
|--------------------------------|-------|------------------|------|-----|-----|------|------------------------|
| Supply Voltage | 1 | V _{CC} | 4.5 | 5.0 | 5.5 | V | 0 °C to +70 °C |
| | | V _{SS} | 0 | 0 | 0 | | |
| Input High Voltage, all inputs | 1 | V _{IH} | 2.4 | — | 6.5 | V | |
| Input Low Voltage, all inputs | 1 | V _{IL} | -2.0 | — | 0.8 | V | |
| Input Low Voltage, DQ(*) | 1 | V _{ILD} | -1.0 | — | 0.8 | V | |

* : Undershoots of up to -2.0 volts with a pulse width not exceeding 20ns are acceptable.

1

FUNCTIONAL OPERATION

ADDRESS INPUTS

1 Eighteen input bits are required to decode any four of 1,048,576 cell addresses in the memory matrix. Since only nine address bits are available, the column and row inputs are separately strobed by $\overline{\text{CAS}}$ and $\overline{\text{RAS}}$ as shown in Figure 1. First, nine row address bits are input on pins A0 through A8 and latched with the row address strobe ($\overline{\text{RAS}}$) then, nine column address bits are input and latched with the column address strobe ($\overline{\text{CAS}}$). Both row and column addresses must be stable on or before the falling edge of $\overline{\text{CAS}}$ and $\overline{\text{RAS}}$, respectively. The address latches are of the flow-through type; thus, address information appearing after t_{RAH} (min)+ t_{r} is automatically treated as the column address.

WRITE ENABLE

The read or write mode is determined by the logic state of $\overline{\text{WE}}$. When $\overline{\text{WE}}$ is active Low, a write cycle is initiated; when $\overline{\text{WE}}$ is High, a read cycle is selected. During the read mode, input data is ignored.

DATA INPUT

Input data is written into memory in either of three basic ways—an early write cycle, an $\overline{\text{OE}}$ (delayed) write cycle, and a read-modify-write cycle. The falling edge of $\overline{\text{WE}}$ or $\overline{\text{CAS}}$, whichever is later, serves as the input data-latch strobe. In an early write cycle, the input data (DQ1–DQ4) is strobed by $\overline{\text{CAS}}$ and the setup/hold times are referenced to $\overline{\text{CAS}}$ because $\overline{\text{WE}}$ goes Low before $\overline{\text{CAS}}$. In a delayed write or a read-modify-write cycle, $\overline{\text{WE}}$ goes Low after $\overline{\text{CAS}}$; thus, input data is strobed by $\overline{\text{WE}}$ and all setup/hold times are referenced to the write-enable signal.

DATA OUTPUT

The three-state buffers are TTL compatible with a fanout of two TTL loads. Polarity of the output data is identical to that of the input; the output buffers remain in the high-impedance state until the column address strobe goes Low. When a read or read-modify-write cycle is executed, valid outputs are obtained under the following conditions:

- t_{TRAC}** : from the falling edge of $\overline{\text{RAS}}$ when t_{RCD} (max) is satisfied.
- t_{TCAC}** : from the falling edge of $\overline{\text{CAS}}$ when t_{RCD} is greater than t_{RCD} , t_{RAD} (max).
- t_{IAA}** : from column address input when t_{RAD} is greater than t_{RAD} (max).
- t_{TOEA}** : from the falling edge of $\overline{\text{OE}}$ when $\overline{\text{OE}}$ is brought Low after t_{TRAC} , t_{TCAC} , or t_{IAA} .

The data remains valid until either $\overline{\text{CAS}}$ or $\overline{\text{OE}}$ returns to a High logic level. When an early write is executed, the output buffers remain in a high-impedance state during the entire cycle.

DC CHARACTERISTICS

(Recommended operating conditions unless otherwise noted)

Notes 3

1

| Parameter | Notes | Symbol | Conditions | Values | | | Unit |
|---|---------------|------------|---|--------|-----|-----|---------------|
| | | | | Min | Typ | Max | |
| Output high voltage | | V_{OH} | $I_{OH} = -5 \text{ mA}$ | 2.4 | — | — | V |
| Output low voltage | | V_{OL} | $I_{OL} = 4.2 \text{ mA}$ | — | — | 0.4 | |
| Input leakage current (any input) | | $I_{I(L)}$ | $0V \leq V_{IN} \leq 5.5V$; $4.5V \leq V_{CC} \leq 5.5V$; $V_{SS} = 0V$; All other pins under test = $0V$ | -10 | — | 10 | μA |
| Output leakage current | | $I_{O(L)}$ | $0V \leq V_{OUT} \leq 5.5V$; Data out disabled | -10 | — | 10 | |
| Operating current (Average Power supply Current) 2 | MB81C4256A-60 | I_{CC1} | \overline{RAS} & \overline{CAS} cycling; $t_{RC} = \text{min}$ | — | — | 74 | mA |
| | MB81C4256A-70 | | | | | 68 | |
| | MB81C4256A-80 | | | | | 62 | |
| | MB81C4256A-10 | | | | | 54 | |
| Standby current (Power supply current) | TTL level | I_{CC2} | $\overline{RAS} = \overline{CAS} = V_{IH}$ | — | — | 2.0 | mA |
| | CMOS level | | $\overline{RAS} = \overline{CAS} \geq V_{CC} - 0.2V$ | | | 1.0 | |
| Refresh current #1 (Average power sup- ply current) 2 | MB81C4256A-60 | I_{CC3} | $\overline{CAS} = V_{IH}$, \overline{RAS} cycling; $t_{RC} = \text{min}$ | — | — | 74 | mA |
| | MB81C4256A-70 | | | | | 68 | |
| | MB81C4256A-80 | | | | | 62 | |
| | MB81C4256A-10 | | | | | 54 | |
| Fast Page Mode current 2 | MB81C4256A-60 | I_{CC4} | $\overline{RAS} = V_{IL}$, \overline{CAS} cycling; $t_{PC} = \text{min}$ | — | — | 61 | mA |
| | MB81C4256A-70 | | | | | 56 | |
| | MB81C4256A-80 | | | | | 56 | |
| | MB81C4256A-10 | | | | | 46 | |
| Refresh current #2 (Average power sup- ply current) 2 | MB81C4256A-60 | I_{CC5} | \overline{RAS} cycling; \overline{CAS} -before- \overline{RAS} ; $t_{RC} = \text{min}$ | — | — | 74 | mA |
| | MB81C4256A-70 | | | | | 68 | |
| | MB81C4256A-80 | | | | | 62 | |
| | MB81C4256A-10 | | | | | 54 | |

AC CHARACTERISTICS

(At recommended operating conditions unless otherwise noted.) Notes 3, 4, 5

| No. | Parameter | Notes | Symbol | MB81C4256A-60 | | MB81C4256A-70 | | MB81C4256A-80 | | MB81C4256A-10 | | Unit |
|-----|---|-------|-----------|---------------|--------|---------------|--------|---------------|--------|---------------|--------|------|
| | | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| 1 | Time Between Refresh | | t_{REF} | — | 8.2 | — | 8.2 | — | 8.2 | — | 8.2 | ms |
| 2 | Random Read/Write Cycle Time | | t_{RC} | 110 | — | 125 | — | 140 | — | 170 | — | ns |
| 3 | Read-Modify-Write Cycle Time | | t_{RWC} | 150 | — | 165 | — | 190 | — | 230 | — | ns |
| 4 | Access Time from \overline{RAS} | 6,9 | t_{RAC} | — | 60 | — | 70 | — | 80 | — | 100 | ns |
| 5 | Access Time from \overline{CAS} | 7,9 | t_{CAC} | — | 15 | — | 20 | — | 20 | — | 25 | ns |
| 6 | Column Address Access Time | 8,9 | t_{AA} | — | 30 | — | 35 | — | 40 | — | 50 | ns |
| 7 | Output Hold Time | | t_{OH} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 8 | Output Buffer Turn On Delay Time | | t_{ON} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 9 | Output Buffer Turn off Delay Time | 10 | t_{OFF} | — | 15 | — | 15 | — | 20 | — | 20 | ns |
| 10 | Transition Time | | t_T | 2 | 50 | 2 | 50 | 2 | 50 | 2 | 50 | ns |
| 11 | \overline{RAS} Precharge Time | | t_{RP} | 40 | — | 45 | — | 50 | — | 60 | — | ns |
| 12 | \overline{RAS} Pulse Width | | t_{RAS} | 60 | 100000 | 70 | 100000 | 80 | 100000 | 100 | 100000 | ns |
| 13 | \overline{RAS} Hold Time | | t_{RSH} | 15 | — | 20 | — | 20 | — | 25 | — | ns |
| 14 | \overline{CAS} to \overline{RAS} Precharge Time | | t_{CRP} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 15 | \overline{RAS} to \overline{CAS} Delay Time | 11,12 | t_{RCD} | 20 | 45 | 20 | 50 | 20 | 60 | 25 | 75 | ns |
| 16 | \overline{CAS} Pulse Width | | t_{CAS} | 15 | — | 20 | — | 20 | — | 25 | — | ns |
| 17 | \overline{CAS} Hold Time | | t_{CSH} | 60 | — | 70 | — | 80 | — | 100 | — | ns |
| 18 | \overline{CAS} Precharge Time (C-B-R cycle) | 19 | t_{CPN} | 10 | — | 10 | — | 10 | — | 10 | — | ns |
| 19 | Row Address Set Up Time | | t_{ASR} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 20 | Row Address Hold Time | | t_{RAH} | 10 | — | 10 | — | 10 | — | 15 | — | ns |
| 21 | Column Address Set Up Time | | t_{ASC} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 22 | Column Address Hold Time | | t_{CAH} | 12 | — | 12 | — | 15 | — | 15 | — | ns |
| 23 | \overline{RAS} to Column Address Delay Time | 13 | t_{RAD} | 15 | 30 | 15 | 35 | 15 | 40 | 20 | 50 | ns |
| 24 | Column Address to \overline{RAS} Lead Time | | t_{RAL} | 30 | — | 35 | — | 40 | — | 50 | — | ns |
| 25 | Read Command Set Up Time | | t_{RCS} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 26 | Read Command Hold Time Referenced to \overline{RAS} | 14 | t_{RRH} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 27 | Read Command Hold Time Referenced to \overline{CAS} | 14 | t_{RCH} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 28 | Write Command Set Up Time | 15 | t_{WCS} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 29 | Write Command Hold Time | | t_{WCH} | 10 | — | 10 | — | 12 | — | 15 | — | ns |
| 30 | \overline{WE} Pulse Width | | t_{WP} | 10 | — | 10 | — | 12 | — | 15 | — | ns |
| 31 | Write Command to \overline{RAS} Lead Time | | t_{RWL} | 15 | — | 15 | — | 20 | — | 25 | — | ns |
| 32 | Write Command to \overline{CAS} Lead Time | | t_{CWL} | 12 | — | 12 | — | 15 | — | 20 | — | ns |
| 33 | DIN set Up Time | | t_{DS} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 34 | DIN Hold Time | | t_{DH} | 10 | — | 10 | — | 12 | — | 15 | — | ns |

AC CHARACTERISTICS (Continued)

(At recommended operating conditions unless otherwise noted.) Notes 3, 4, 5

| No. | Parameter | Notes | Symbol | MB81C4256A-60 | | MB81C4256A-70 | | MB81C4256A-80 | | MB81C4256A-10 | | Unit |
|-----|---|-------|-------------------|---------------|-----|---------------|-----|---------------|-----|---------------|-----|------|
| | | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| 35 | RAS Precharge time to $\overline{\text{CAS}}$ Active Time (Refresh cycles) | | t_{RPC} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 36 | $\overline{\text{CAS}}$ Set Up Time for $\overline{\text{CAS}}$ -before-RAS Refresh | | t_{CSR} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 37 | $\overline{\text{CAS}}$ Hold Time for $\overline{\text{CAS}}$ -before-RAS Refresh | | t_{CHR} | 10 | — | 10 | — | 12 | — | 15 | — | ns |
| 38 | Access Time from $\overline{\text{OE}}$ | 9 | t_{OEA} | — | 15 | — | 20 | — | 20 | — | 20 | ns |
| 39 | Output Buffer Turn Off Delay from $\overline{\text{OE}}$ | 10 | t_{OEZ} | — | 15 | — | 15 | — | 20 | — | 25 | ns |
| 40 | $\overline{\text{OE}}$ to $\overline{\text{RAS}}$ Lead Time for Valid Data | | t_{OEL} | 10 | — | 10 | — | 10 | — | 10 | — | ns |
| 41 | $\overline{\text{OE}}$ Hold Time Referenced to $\overline{\text{WE}}$ | 16 | t_{OEH} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 42 | $\overline{\text{OE}}$ to Data In Delay Time | | t_{OED} | 15 | — | 15 | — | 20 | — | 25 | — | ns |
| 43 | DIN to $\overline{\text{CAS}}$ Delay Time | 17 | t_{DZC} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 44 | DIN to $\overline{\text{OE}}$ Delay Time | 17 | t_{DZO} | 0 | — | 0 | — | 0 | — | 0 | — | ns |
| 50 | Fast Page Mode Read/Write Cycle Time | | t_{PC} | 40 | — | 45 | — | 45 | — | 55 | — | ns |
| 51 | Fast Page Mode Read-Modify-Write Cycle Time | | t_{PRWC} | 77 | — | 82 | — | 90 | — | 110 | — | ns |
| 52 | Access Time from $\overline{\text{CAS}}$ Precharge | 9,18 | t_{CPA} | — | 35 | — | 40 | — | 40 | — | 50 | ns |
| 53 | Fast Page Mode $\overline{\text{CAS}}$ Precharge Time | | t_{CP} | 10 | — | 10 | — | 10 | — | 10 | — | ns |

Notes:

1. Referenced to VSS
2. Icc depends on the output load conditions and cycle rates; The specified values are obtained with the output open. Icc depends on the number of address change as $\overline{\text{RAS}} = V_{\text{IL}}$ and $\overline{\text{CAS}} = V_{\text{IH}}$. Icc1, Icc3 and Icc5 are specified at one time of address change during $\overline{\text{RAS}} = V_{\text{IL}}$ and $\overline{\text{CAS}} = V_{\text{IH}}$. Icc4 is specified at one time of address change during $\overline{\text{RAS}} = V_{\text{IL}}$ and $\overline{\text{CAS}} = V_{\text{IH}}$.
3. An Initial pause ($\overline{\text{RAS}} = \overline{\text{CAS}} = V_{\text{IH}}$) of 200 μ s is required after power-up followed by any eight $\overline{\text{RAS}}$ -only cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of eight $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ initialization cycles instead of 8 $\overline{\text{RAS}}$ cycles are required.
4. AC characteristics assume $t_{\text{r}} = 5\text{ns}$
5. V_{IH} (min) and V_{IL} (max) are reference levels for measuring timing of input signals. Also transition times are measured between V_{IH} (min) and V_{IL} (max).
6. Assumes that $t_{\text{RCD}} \leq t_{\text{RCD}}(\text{max})$, $t_{\text{RAD}} \leq t_{\text{RAD}}(\text{max})$. If t_{RCD} is greater than the maximum recommended value shown in this table, t_{RAC} will be increased by the amount that t_{RCD} exceeds the value shown. Refer to Fig. 2 and 3.
7. Assumes that $t_{\text{RCD}} \geq t_{\text{RCD}}(\text{max})$, $t_{\text{RAD}} \geq t_{\text{RAD}}(\text{max})$. If $t_{\text{ASC}} \geq t_{\text{AA}} - t_{\text{CAC}} - t_{\text{T}}$, access time is t_{CAC} .
8. If $t_{\text{RAD}} \geq t_{\text{RAD}}(\text{max})$ and $t_{\text{ASC}} \leq t_{\text{AA}} - t_{\text{CAC}} - t_{\text{T}}$, access time is t_{AA} .
9. Measured with a load equivalent to two TTL loads and 100 pF.
10. t_{OFF} and t_{OEZ} is specified that output buffer change to high impedance state.
11. Operation within the $t_{\text{RCD}}(\text{max})$ limit ensures that $t_{\text{RAC}}(\text{max})$ can be met. $t_{\text{RCD}}(\text{max})$ is specified as a reference point only; if t_{RCD} is greater than the specified $t_{\text{RCD}}(\text{max})$ limit, access time is controlled exclusively by t_{CAC} or t_{AA} .
12. $t_{\text{RCD}}(\text{min}) = t_{\text{RAH}}(\text{min}) + 2t_{\text{T}} + t_{\text{ASC}}(\text{min})$
13. Operation within the $t_{\text{RAD}}(\text{max})$ limit ensures that $t_{\text{RAC}}(\text{max})$ can be met. $t_{\text{RAD}}(\text{max})$ is specified as a reference point only; if t_{RAD} is greater than the specified $t_{\text{RAD}}(\text{max})$ limit, access time is controlled exclusively by t_{CAC} or t_{AA} .
14. Either t_{RRH} or t_{RCH} must be satisfied for a read cycle.
15. t_{WCS} is specified as a reference point only. If $t_{\text{WCS}} \geq t_{\text{WCS}}(\text{min})$ the data output pin will remain High-Z state through entire cycle.
16. Assumes that $t_{\text{WCS}} < t_{\text{WCS}}(\text{min})$
17. Either t_{DZC} or t_{DZO} must be satisfied.
18. t_{CPA} is access time from the selection of a new column address (that is caused by changing $\overline{\text{CAS}}$ from "L" to "H"). Therefore, if t_{CP} is shortened, t_{CPA} is longer than $t_{\text{CPA}}(\text{max})$.
19. Assumes that $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh only.

Fig. 2 - t_{RAC} vs. t_{RCD}


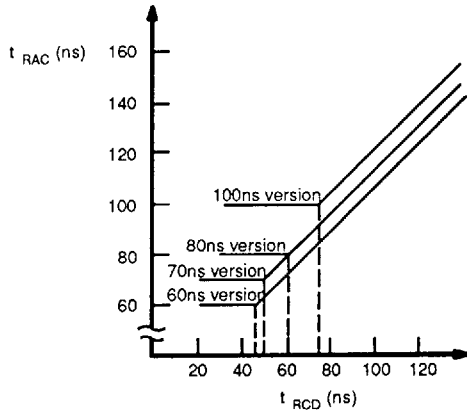


Fig. 3 - t_{RAC} vs. t_{RAD}

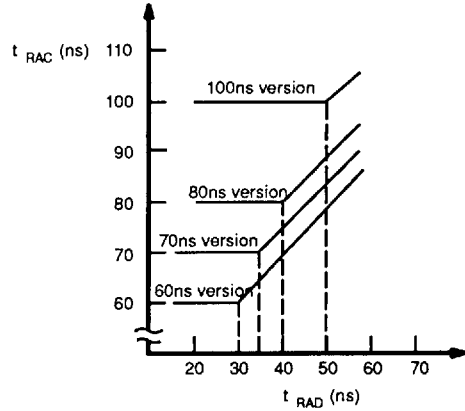


FUNCTIONAL TRUTH TABLE

| Operation Mode | Clock Input | | | | Address | | Input Data | | Refresh | Note |
|--|-------------|-----|-----|-----|---------|--------|------------|--------|---------|-------------------------------------|
| | RAS | CAS | WE | OE | Row | Column | Input | Output | | |
| Standby | H | H | X | X | — | — | — | High-Z | — | |
| Read Cycle | L | L | H | L | Valid | Valid | — | Valid | Yes * | $t_{ACS} \geq t_{ACS}(\text{min})$ |
| Write Cycle (Early Write) | L | L | L | X | Valid | Valid | Valid | High-Z | Yes * | $t_{WCS} \geq t_{WCS}(\text{min})$ |
| Read-Modify- Write Cycle | L | L | H→L | L→H | Valid | Valid | Valid | Valid | Yes * | |
| $\overline{\text{RAS}}$ -only Refresh Cycle | L | H | X | X | Valid | — | — | High-Z | Yes | |
| $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Refresh Cycle | L | L | X | X | — | — | — | High-Z | Yes | $t_{CSR} \geq t_{WCSR}(\text{min})$ |
| Hidden Refresh | H→L | L | X | L | — | — | — | Valid | Yes | Previous data is kept. |

X: "H" or "L"

*: It is impossible in Fast Page Mode

Fig. 4 - READ CYCLE

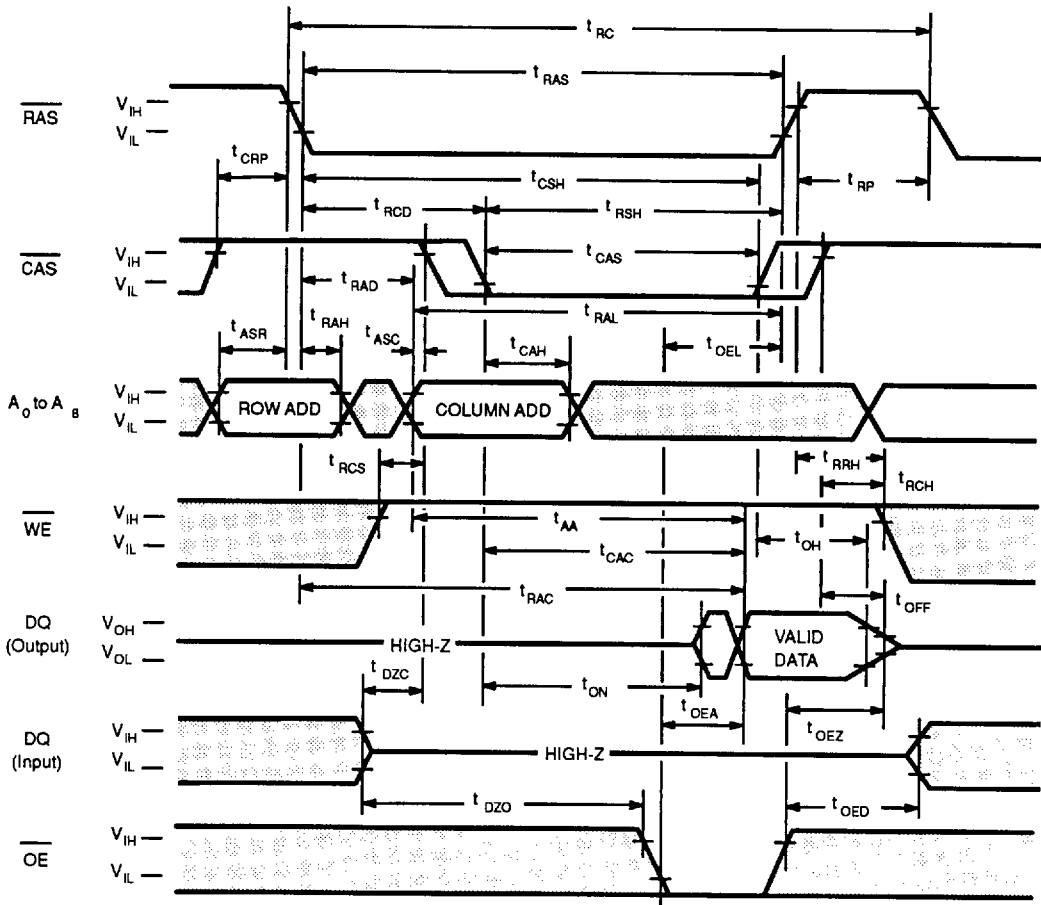

□ "H" or "L"

DESCRIPTION

To implement a read operation, a valid address is latched in by the \overline{RAS} and \overline{CAS} address strobes and with \overline{WE} set to a High level and \overline{OE} set to a low level, the output is valid once the memory access time has elapsed. The access time is determined by $\overline{RAS}(t_{RAC})$, $\overline{CAS}(t_{CAC})$, $\overline{OE}(t_{OEA})$ or column addresses (t_{AA}) under the following conditions:


If $t_{RCD} > t_{RCD}(\max)$, access time = t_{CAC} .

If $t_{RAD} > t_{RAD}(\max)$, access time = t_{AA} .

If \overline{OE} is brought Low after t_{RAC} , t_{CAC} , or t_{AA} (which ever occurs later), access time = t_{OEA} .

However, if either \overline{CAS} or \overline{OE} goes High, the output returns to a high-impedance state after t_{OH} is satisfied.


Fig. 5 - EARLY WRITE CYCLE (\overline{OE} = "H" or "L")

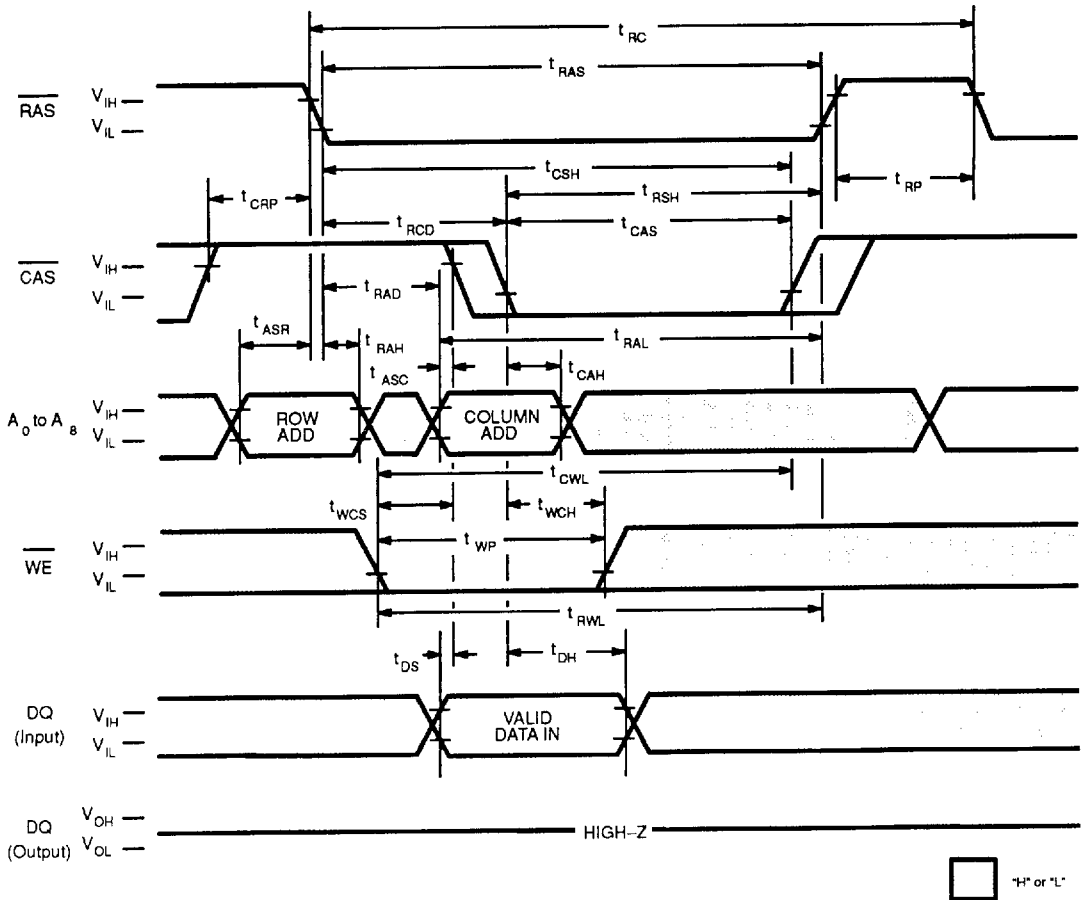

DESCRIPTION

A write cycle is similar to a read cycle except \overline{WE} is set to a Low state and \overline{OE} is a "H" or "L" signal. A write cycle can be implemented in either of three ways - early write, \overline{OE} write (delayed write), or read-modify-write. During all write cycles, timing parameters t_{RWL} , t_{CWL} and t_{RAL} must be satisfied. In the early write cycle shown above t_{WCS} is satisfied, data on the DQ pin is latched with the falling edge of CAS and written into memory.

Fig. 6 - \overline{OE} (DELAYED WRITE CYCLE)

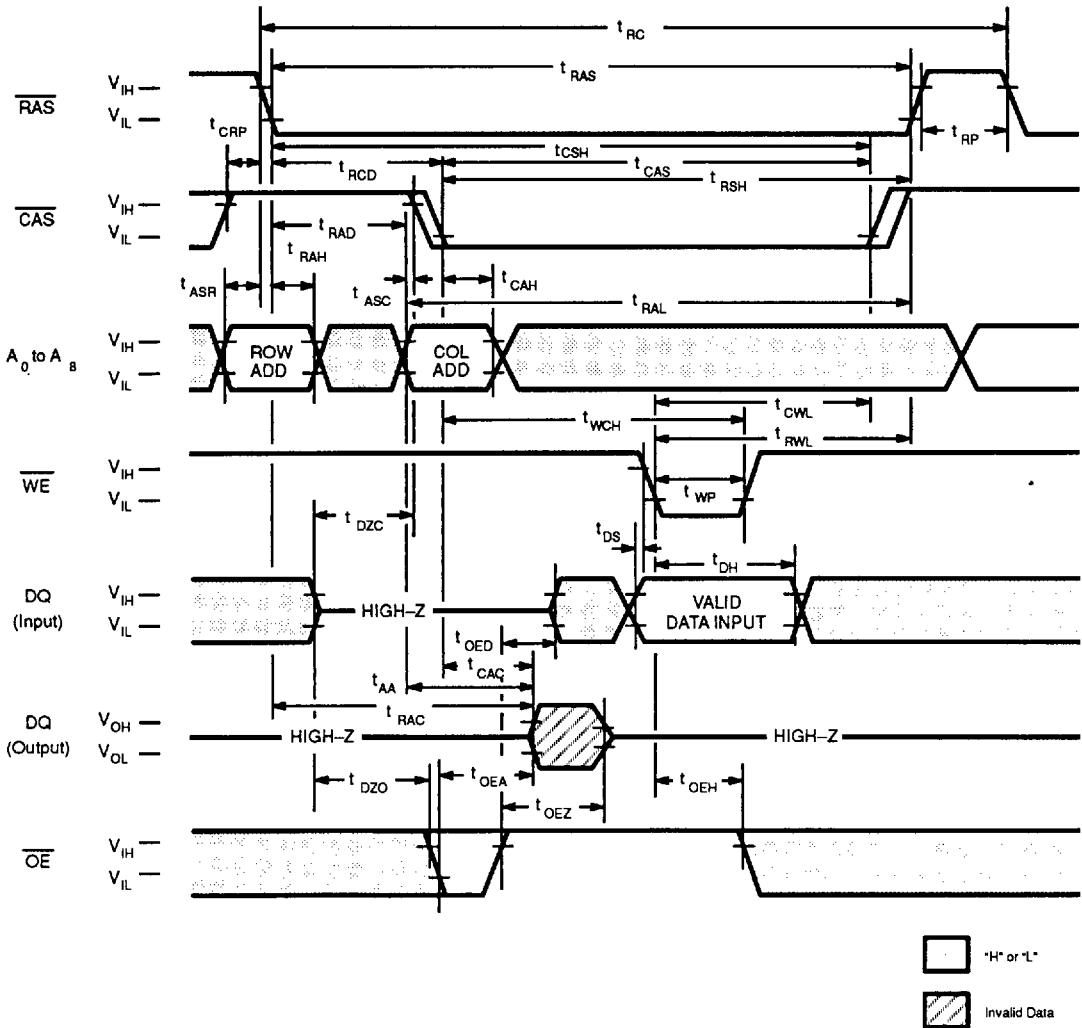


DESCRIPTION

In the \overline{OE} (delayed write) cycle, t_{WCS} is not satisfied; thus, the data on the DQ pins is latched with the falling edge of \overline{WE} and written into memory. The Output Enable (\overline{OE}) signal must be changed from Low to High before \overline{WE} goes Low ($t_{OED} + t_{DS}$).

1


Fig. 11 - FAST PAGE MODE READ-MODIFY-WRITE CYCLE

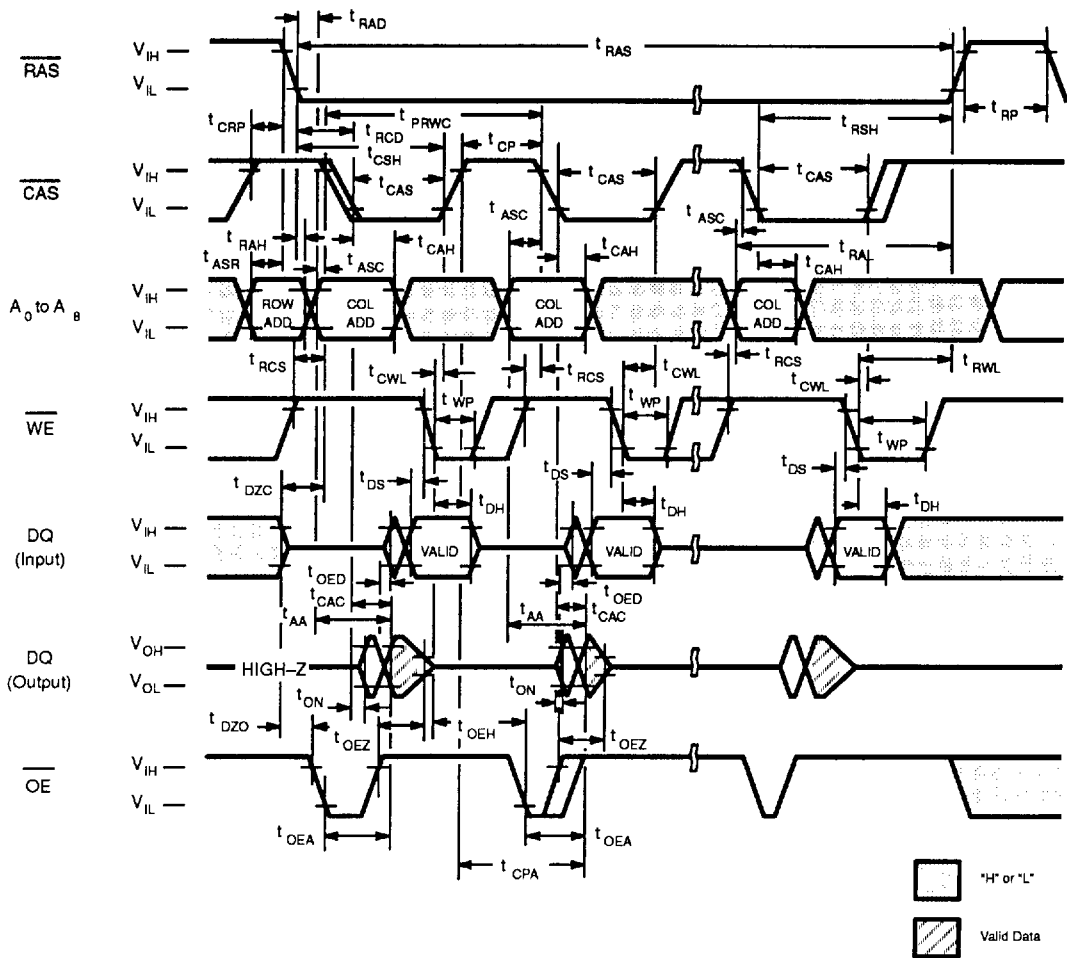

DESCRIPTION

During fast page mode of operation, the read-modify-write cycle can be executed by switching \overline{WE} from High to Low after input data appears at the DQ pins during a normal cycle.

Fig. 12 - $\overline{\text{RAS}}$ -ONLY REFRESH ($\overline{\text{WE}} = \overline{\text{OE}} = \text{"H"}$ or "L")

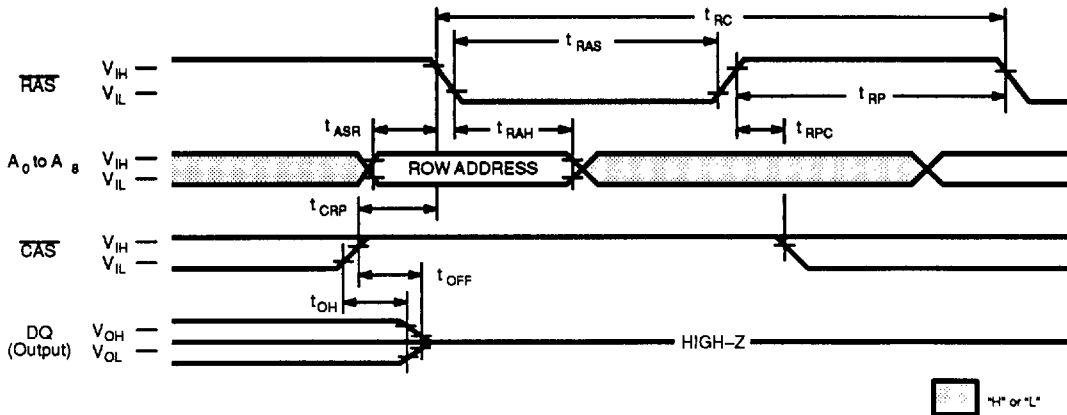


DESCRIPTION

Refresh of RAM memory cells is accomplished by performing a read, a write, or a read-modify-write cycle at each of 512 row addresses every 8.2-milliseconds. Three refresh modes are available: $\overline{\text{RAS}}$ -only refresh, $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh, and hidden refresh.

$\overline{\text{RAS}}$ -only refresh is performed by keeping $\overline{\text{RAS}}$ Low and $\overline{\text{CAS}}$ High throughout the cycle; the row address to be refreshed is latched on the falling edge of $\overline{\text{RAS}}$. During $\overline{\text{RAS}}$ -only refresh, Dout pin is kept in a high-impedance state.

1

Fig. 13 - $\overline{\text{CAS}}$ -BEFORE- $\overline{\text{RAS}}$ REFRESH (ADDRESSES = $\overline{\text{WE}} = \overline{\text{OE}} = \text{"H"}$ or "L")

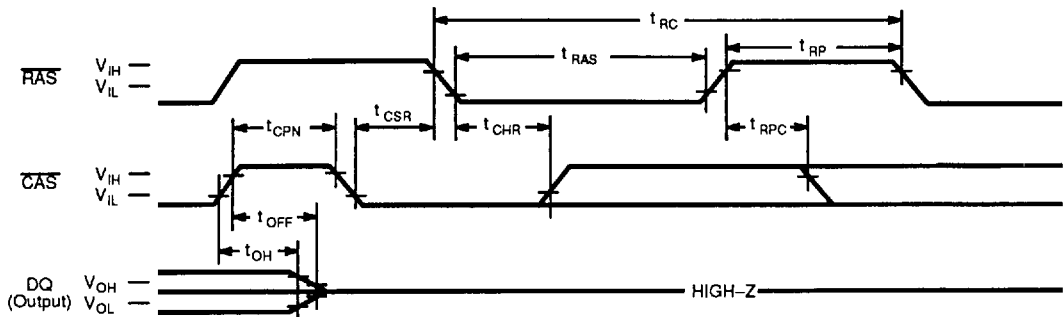


DESCRIPTION

$\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh is an on-chip refresh capability that eliminates the need for external refresh addresses. If $\overline{\text{CAS}}$ is held Low for the specified setup time (t_{CSR}) before $\overline{\text{RAS}}$ goes Low, the on-chip refresh control clock generators and refresh address counter are enabled. An internal refresh operation automatically occurs and the refresh address counter is internally incremented in preparation for the next $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh operation.

1

Fig. 14 - HIDDEN REFRESH CYCLE

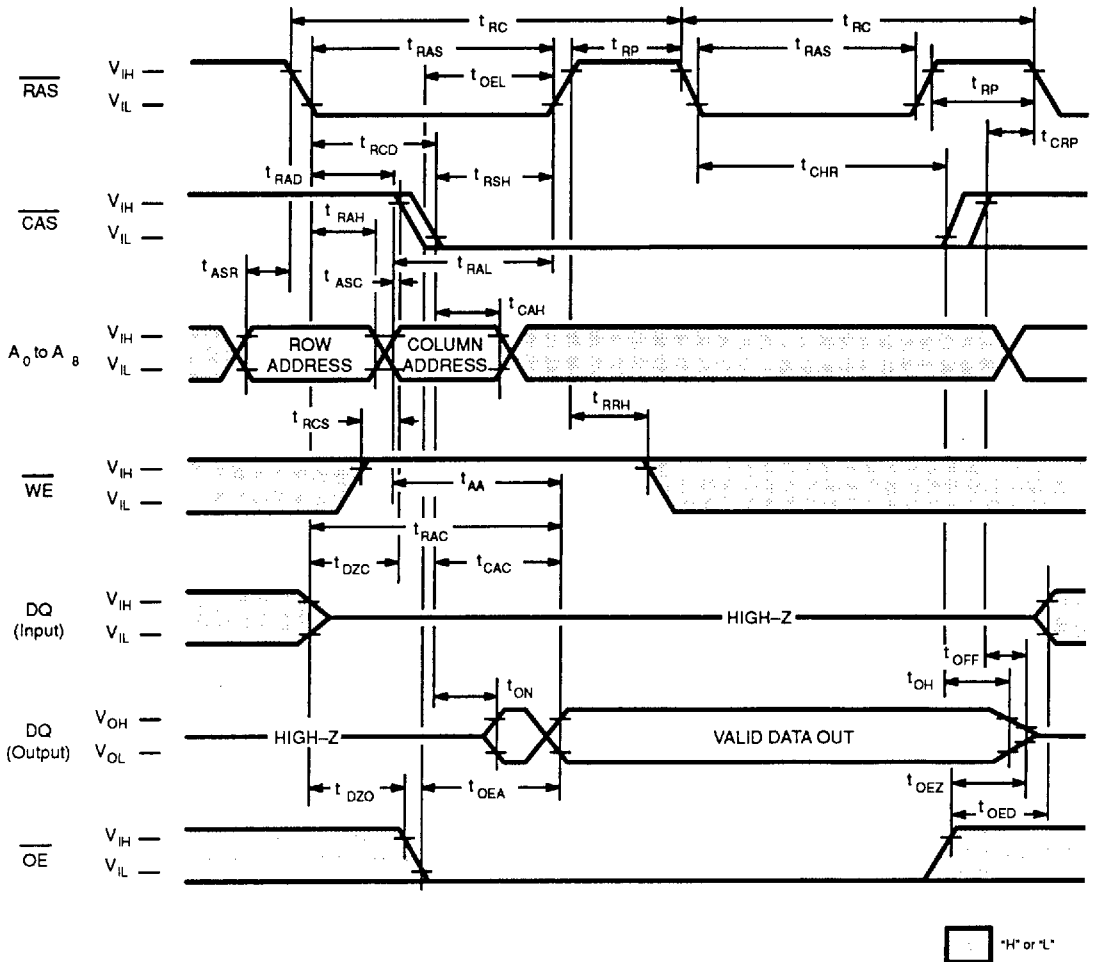


□ "H" or "L"

DESCRIPTION

A hidden refresh cycle may be performed while maintaining the latest valid data at the output by extending the active time of $\overline{\text{CAS}}$ and cycling $\overline{\text{RAS}}$. The refresh row address is provided by the on-chip refresh address counter. This eliminates the need for the external row address that is required by DRAMs that do not have $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh capability.

Fig. 15 - $\overline{\text{CAS}}$ -BEFORE- $\overline{\text{RAS}}$ REFRESH COUNTER TEST CYCLE

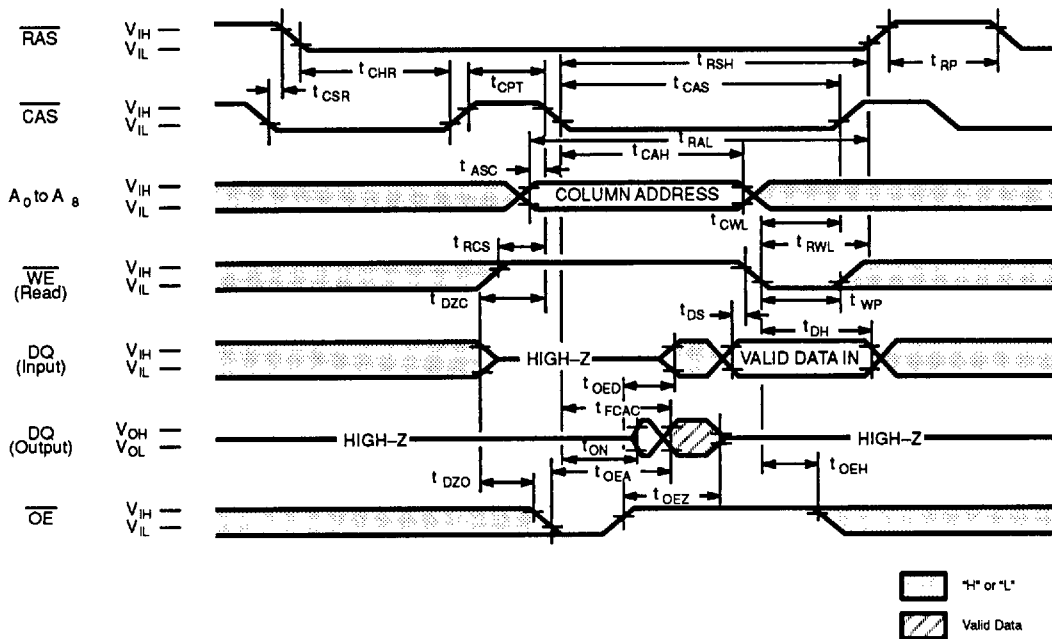

DESCRIPTION

A special timing sequence using the $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh counter test cycle provides a convenient method to verify the functionality of $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh circuitry. If, after a $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycle, $\overline{\text{CAS}}$ makes a transition from High to Low while $\overline{\text{RAS}}$ is held Low, read and write operations are enabled as shown above.

Row Address: Bits A0 through A8 are defined by the on-chip refresh counter.

Column Address: Bits A0 through A8 are defined by latching levels on A0-A8 at the second falling edge of $\overline{\text{CAS}}$.

The $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ Counter Test procedure is as follows :

- 1) Initialize the internal refresh address counter by using 8 $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh cycles.
- 2) Use the same column address throughout the test.
- 3) Write "0" to all 512 row addresses (DQ1 to DQ4) at the same column address by using normal write cycles.
- 4) Read "0" written in procedure 3) and check; simultaneously write "1" to the same addresses by using $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh counter test (read-modify-write cycles). Repeat this procedure 512 times with addresses generated by the internal refresh address counter.
- 5) Read and check data written in procedure 4) by using normal read cycle for all 512 (DQ1 to DQ4) memory locations.
- 6) Complement test pattern and repeat procedures 3), 4), and 5).

(At recommended operating conditions unless otherwise noted.)

| No. | Parameter | Symbol | MB81C4256A-60 | | MB81C4256A-70 | | MB81C4256A-80 | | MB81C4256A-10 | | Unit |
|-----|--|-------------------|---------------|-----|---------------|-----|---------------|-----|---------------|-----|------|
| | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| 90 | Access Time from $\overline{\text{CAS}}$ | t_{FCAC} | — | 40 | — | 45 | — | 50 | — | 60 | ns |
| 91 | $\overline{\text{CAS}}$ Precharge Time | t_{CPT} | 20 | — | 20 | — | 20 | — | 20 | — | ns |

Note . Assumes that $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$ refresh counter test cycle only.


MB81C4256A-60
 MB81C4256A-70
 MB81C4256A-80
 MB81C4256A-10

PACKAGE DIMENSIONS

(Suffix : -P)

1

20-LEAD PLASTIC DUAL IN-LINE PACKAGE
 (CASE No.: DIP-20P-M03)

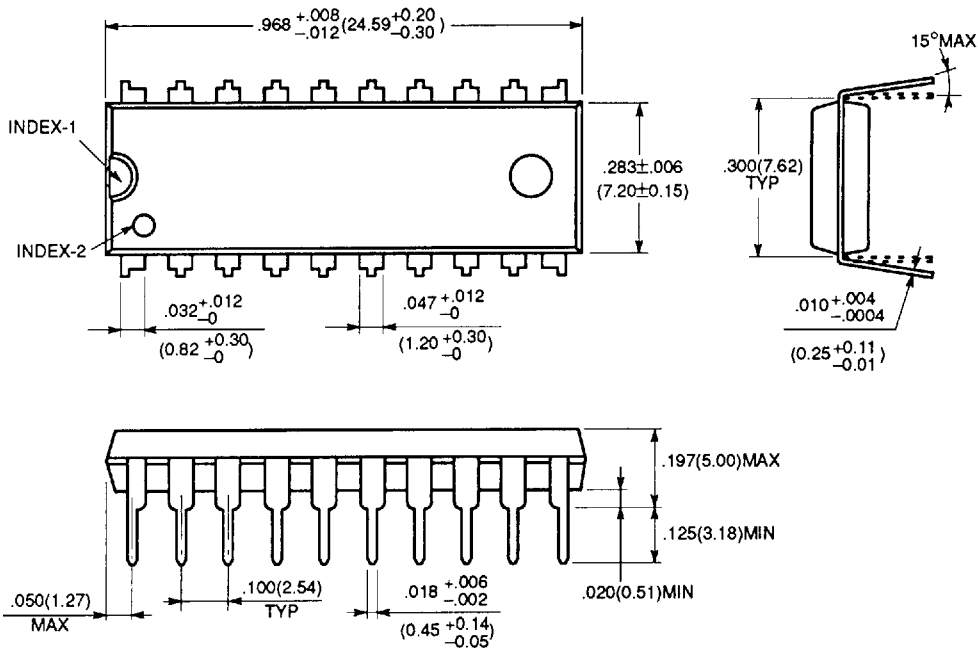


Dimensions in
 inches (millimeters)

©1991 FUJITSU LIMITED D20011S-1C

PACKAGE DIMENSIONS (Continued)

(Suffix : -PJ)

**26-LEAD PLASTIC LEADED CHIP CARRIER
 (CASE No.: LCC-26P-M04)**

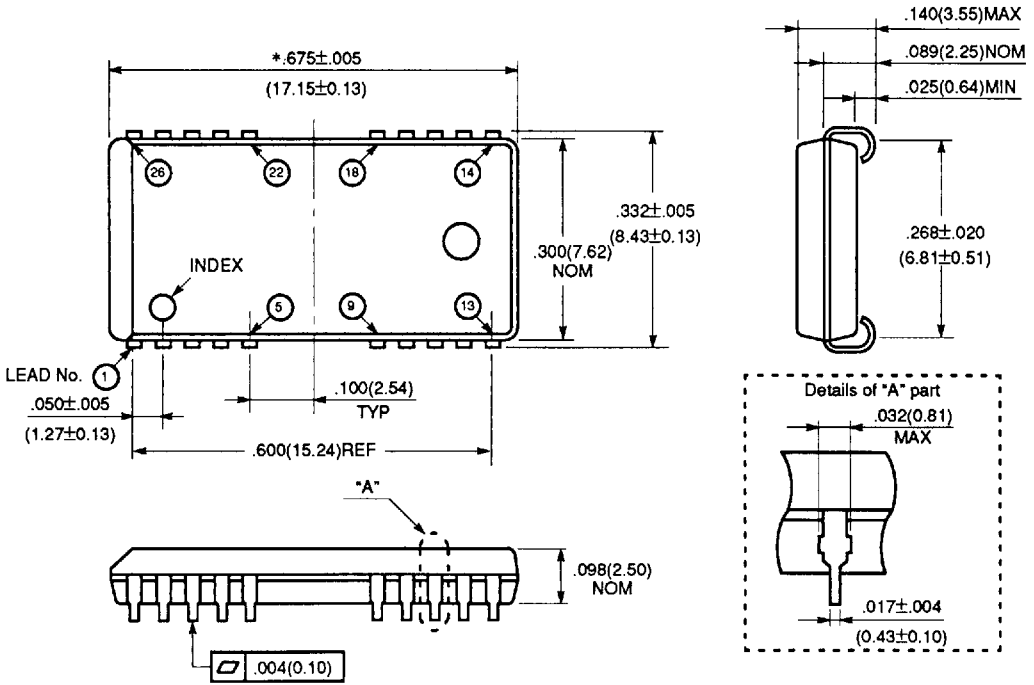

- Note:**
1. *: This dimension includes resin protrusion. (Each side: $.006$ (0.15) MAX)
 2. Although this package has 20 leads only, its pin positions are the same as that of 26-lead package.
 3. Dimensions in inches (millimeters)

©1991 FUJITSU LIMITED C26054S-1C



1

MB81C4256A-60
 MB81C4256A-70
 MB81C4256A-80
 MB81C4256A-10

PACKAGE DIMENSIONS (Continued)

(Suffix : -PSZ)

20-LEAD PLASTIC ZIG-ZAG IN-LINE PACKAGE
 (CASE No.: ZIP-20P-M02)

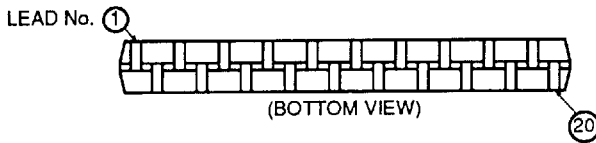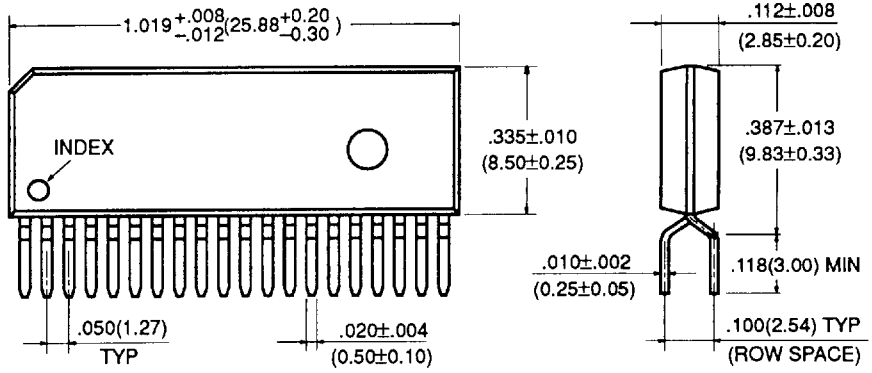




©1991 FUJITSU LIMITED Z20002S-4C

Dimensions in
 inches (millimeters)

PACKAGE DIMENSIONS (Continued)

(Suffix: - PFTN)

24-LEAD PLASTIC FLAT PACKAGE
 (CASE No.: FPT-24P-M04)

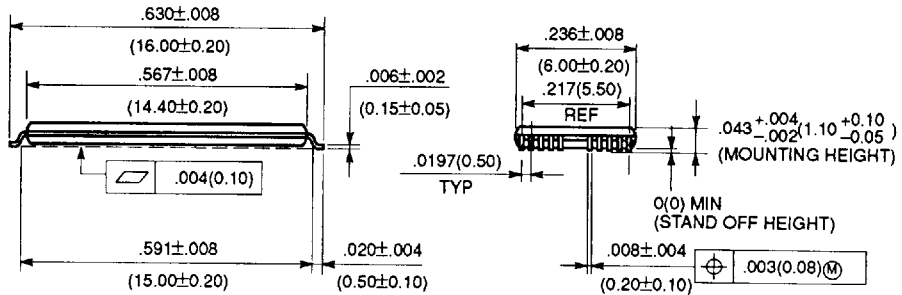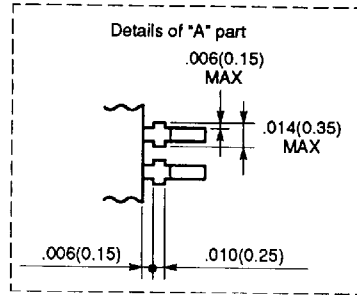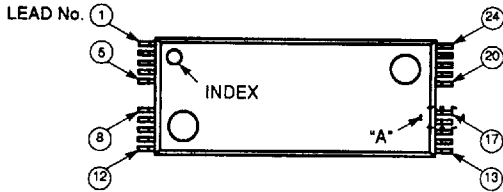

©1991 FUJITSU LIMITED F24020S-3C

Dimensions in inches (millimeters)

1




MB81C4256A-60
 MB81C4256A-70
 MB81C4256A-80
 MB81C4256A-10

PACKAGE DIMENSIONS (Continued)

(Suffix: - PFTR)

1

24-LEAD PLASTIC FLAT PACKAGE (CASE No.: FPT-24P-M05)

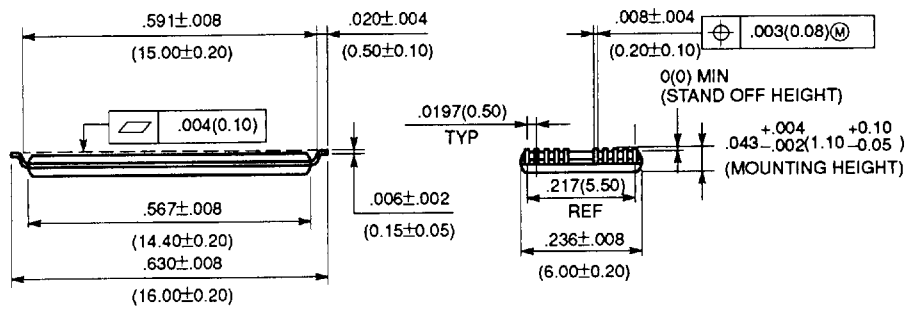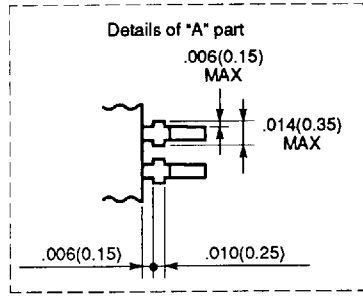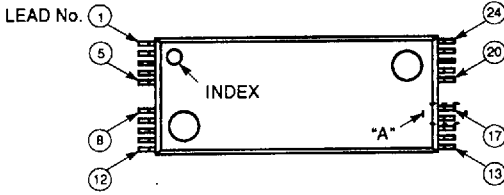

©1991 FUJITSU LIMITED F24021S-3C

Dimensions in inches (millimeters)