

**DIONICS, INC.**65 Rushmore Street
Westbury, NY 11590

Phone: (516) 997-7474

Fax: (516) 997-7479

Website: www.dionics-usa.com**OPTO-ISOLATED PHOTOVOLTAIC ISO-GATE™ MOSFET DRIVERS****DIG-11-06-030****DIG-11-06-150****DIG-11-08-050****DIG-12-06-025****DIG-12-08-010****DIG-12-08-045****DIG-12-06-100****DIG-12-06-250****Features:**

- Completely Isolated Voltage Signal Generation
- Dielectrically Isolated
- Logic Circuit Compatibility
- High Open Circuit Voltage
- High Operating Temperature
- Fast Response Time
- High Isolation Resistance
- Excellent Input/Output Linearity
- Self Limiting Gate Voltage

Applications:


- Gate Drive For MOS devices
- Gate Drive For SCR
- Solid-State Relays
- Interface Between Logic Circuits & External Loads
- A.T.E. (Automatic Test Equipment)
- Switching Equipment
- Isolation Amplifiers
- Load Control From Microprocessor I/O Ports
- Thermocouple Open Detectors

Description:

The photovoltaic MOSFET driver is a State-of-the-Art, optically coupled floating power source used primarily to control MOSFETs when electrical isolation between input and output is required. The ISO-GATE™ is a state-of-the-art opto-isolator incorporating DIONICS' photovoltaic (PV) diode arrays and an infrared LED. The diode array is a unique I.C. consisting of series-connected photovoltaic diodes. The diodes are completely isolated from each other and from their common substrate by means of SiO₂ Dielectric Isolation (DI). These photovoltaic output chips are electrically isolated but optically coupled to the LED.


The typical input circuit to the LED is a limiting resistor connected in series with the LED. When activated, the LED emits infrared light towards the photovoltaic diode array, which then responds by generating an open circuit voltage (Voc). This Voc is floating and is therefore completely isolated. The Voc value depends on the LED input drive and load impedance. DIONICS, Inc offers a wide variety of package styles including low-cost plastic Mini-DIP's, high reliability TO-5 metal cans, 8-pin ceramic side brazed DIP's and ceramic chip carriers for hybrid manufacturers. Other custom packages and custom designs are also available. Surface mount gull wing packages are also available.

- **Group I: DIG-11-06-030; DIG-11-06-150; DIG-11-08-050.**
- **Group II: DIG-12-06-025; DIG-12-06-100; DIG-12-06-250; DIG-12-08-010; DIG-12-08-045.**

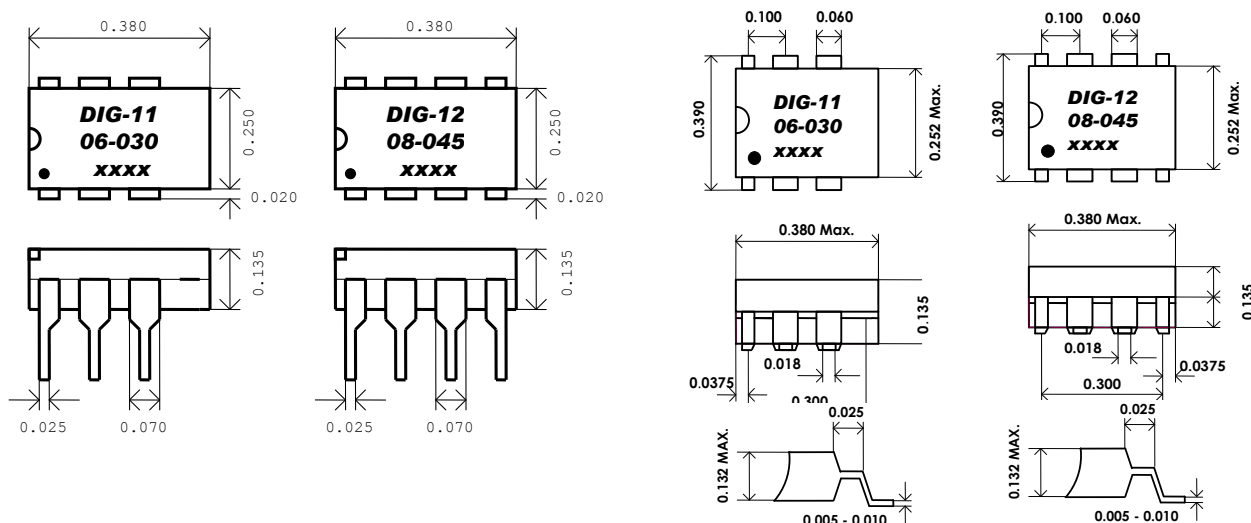


Typical Applications


1. Power MOSFET Photovoltaic SPST N/O DC Relays

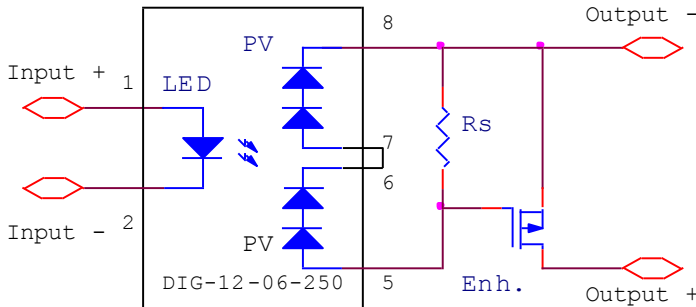


2. Power MOSFET SPDT Photovoltaic SPST N/O AC-DC Relays:

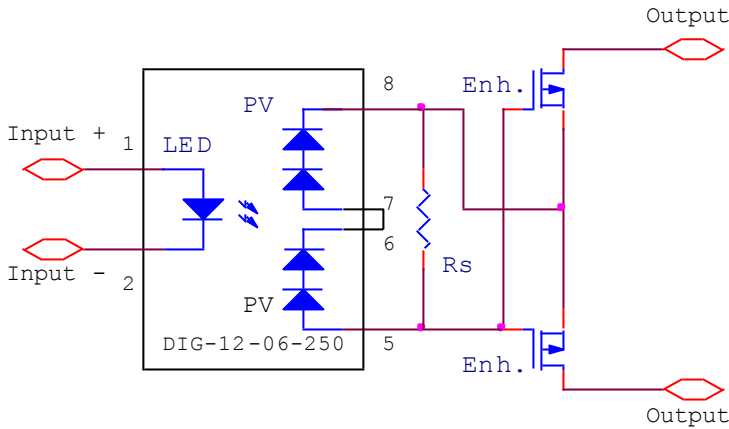


3. Power MOSFET Photovoltaic SPST N/O Relays With High Speed Turn-Off:

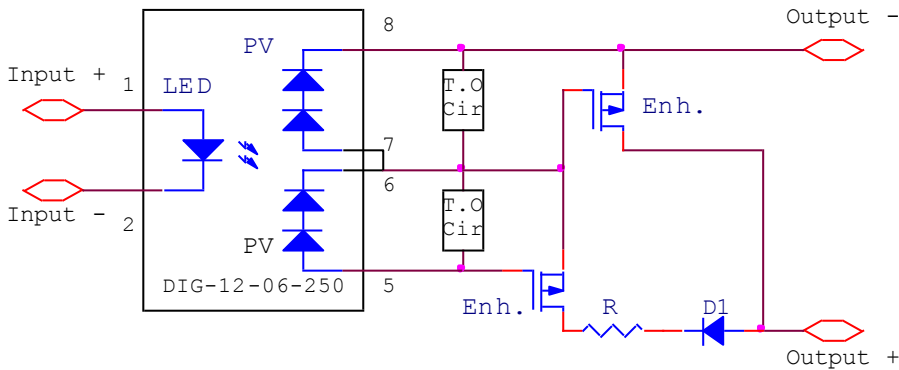

4. Power MOSFET Photovoltaic SPST N/O Relays With Opto-Transistor for High Speed Turn-Off:

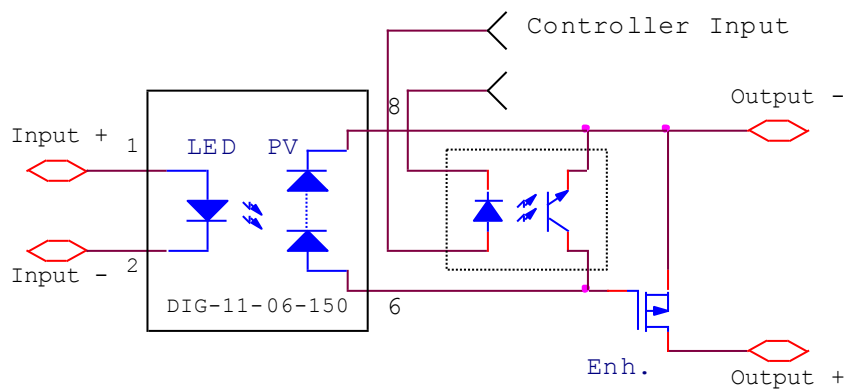

5. Open Thermocouple Detector:

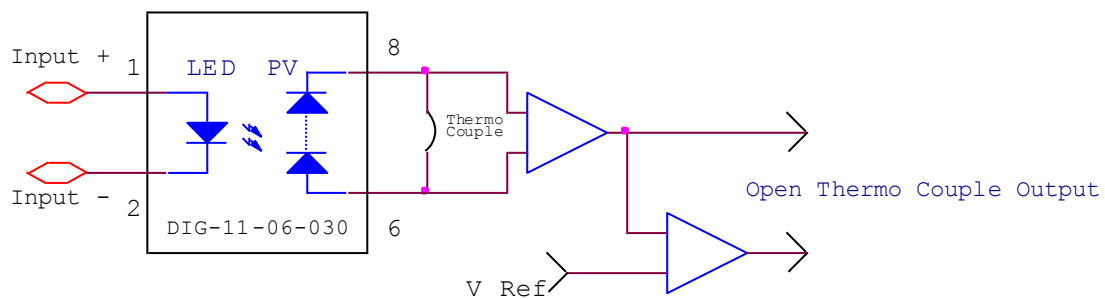

6. Isolation Amplifier:

