


SPECIFICATIONS:

Contact Current Rating:1Amperes
 Dielectric Withstanding Voltage:AC 500V
 Insulation Resistance:500 Megohms Min. At DC 500V
 Contact Resistance:30 Milliohms Max.
 Operating Temperature :-55°C To +105°C
 Contact :Copper Alloy And Gold Tin Plated
 Insulator: P.B.T. UL 94V-0 Rated
 Shell:Copper Alloy And Nickel Plated

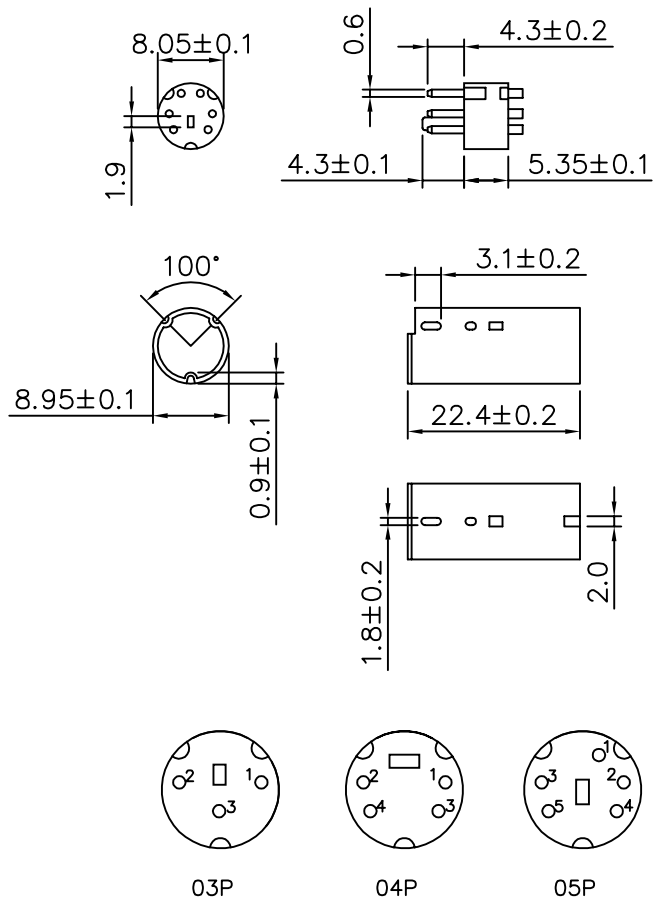

AUK A NUMBER OF AUK GROUP
 太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 MDS03P

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 AWG.

SCALE NONE

REV. A

UNIT mm

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------