


PCB Terminal Strips, Series 227, 228, 740, Pin Spacings 5 mm / 0.197 in; 6.35 mm / 1/4 in; 11.1 mm / 7/16 in

CAGE CLAMP®
CONNECTION



4
39

Pin spacing 5 mm / 0.197 in
0.08 – 2.5 mm² | AWG 28 – 12
250 V/4 kV/3, 16 A

6 – 7 mm / 0.26 in

*

Pin spacing 6.35 mm / 1/4 in
0.08 – 4 mm² | AWG 28 – 12
250 V/4 kV/3, 16 A | 300 V, 10 A
500 V/4 kV/2, 16 A | 300 V, 10 A




9 – 10 mm / 0.37 in

*


Pin spacing 11.1 mm / 7/16 in
2 x 0.08 – 4 mm² | 2 x AWG 28 – 12
500 V/6 kV/3, 20 A | 300 V, 20 A
1000 V/6 kV/2, 20 A | 300 V, 20 A


9 – 10 mm / 0.37 in

*

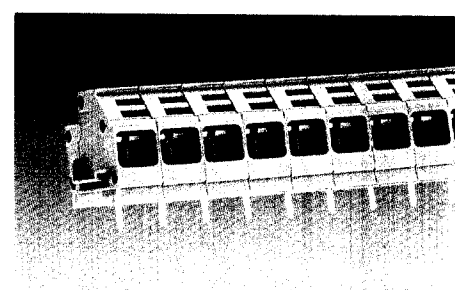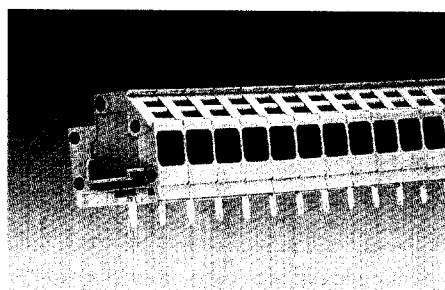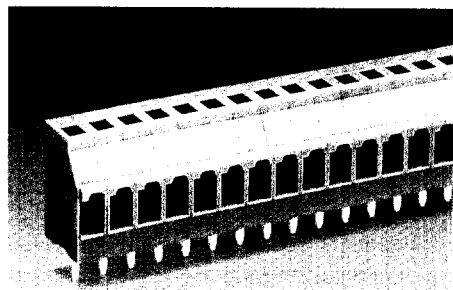


No. of poles	Item-No.	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Terminal strips, grey, standard lengths, 1 solder pin/pole		Terminal strips, grey, with end plate, standard lengths, solder pin 0.8 x 1.6 mm / 0.031 x 0.063 in			Terminal strips, grey, with end plate, standard lengths, solder pin 0.8 x 1.6 mm / 0.031 x 0.063 in		
2	740-102	2	227-552	100	2	228-552	10
3	740-103	3	227-553	50	3	228-553	10
4	740-104	:	:		:	:	
5	740-105	:	:		:	:	
6	740-106	11	227-561	25	11	228-561	10
7	740-107	12	227-562	25	12	228-562	10
8	740-108	13	227-563	25	13	228-563	10
9	740-109	14	227-564	25	14	228-564	10
10	740-110	15	227-565	20	15	228-565	10
12	740-112	16	227-566	20	16	228-566	10
16	740-116	17	227-567	20	17	228-567	10
24	740-124	18	227-568	20	18	228-568	10
Additional item-Nos. for colored terminal strips		19	227-569	20	19	228-569	10
blue	... /000-006	20	227-570	20	20	228-570	10
green	... /000-023	21	227-571	10	21	228-571	10
light grey	... /000-021	22	227-572	10	22	228-572	10
Ordering example		23	227-573	10	23	228-573	10
Terminal strip, 12 poles, green:		24	227-574	10	24	228-574	10
740-112/000-023		Other lengths – contact factory.			Other lengths – contact factory.		
Other lengths – contact factory		For assemblies of different colors, please see form on page 4.76			For assemblies of different colors, please see form on page 4.76		

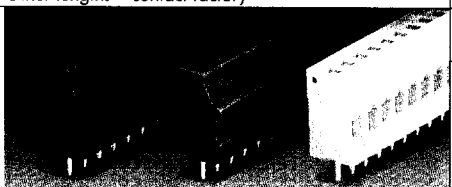
	Accessories (for marking accessories please see Section 8)		Test plug, w. cable 500 mm/1'7.7" 2 mm/0.079 in Ø, red 210-136 50 2.3 mm/0.091 in Ø, yel. 210-137 50		Test plug, w. cable 500 mm/1'7.7" 2 mm/0.079 in Ø, red 210-136 50 2.3 mm/0.091 in Ø, yel. 210-137 50
Dimensions (in mm)					

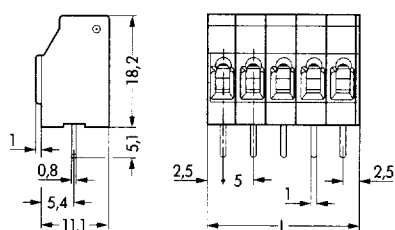

Diameter of drilled hole: 1.3^{+0.1} mm
L = No. of poles x pin spacing



Diameter of drilled hole: 2^{+0.1} mm
L = (No. of poles x 6.35 mm) + 5 mm

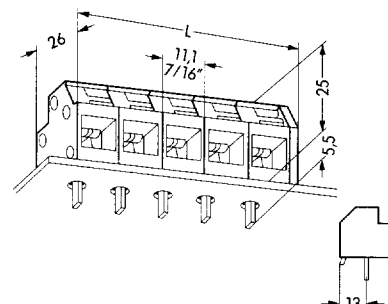

Diameter of drilled hole: 2^{+0.1} mm
L = (No. of poles x 11.1 mm) + 6.5 mm

* For international approvals (with corresponding ratings) see pages 10.3 – 10.38.

WAGO