
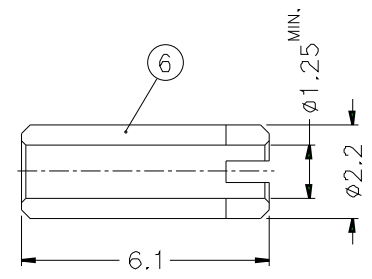




RECOMMENDED
CABLE STRIPPING DIM'S

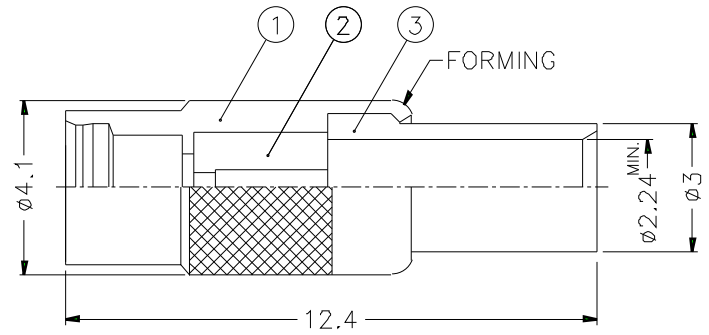

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER QQ-B-626
 - 2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 3. BERYLLIUM COPPER PER QQ-C-530
 - 4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN THICK OVER COPPER STRIKE
 - 5. TEFLON MIL-P-1946B

6	SOLDER BARREL	NOTE 1	NOTE 2	1	SB-047X61
5	INSULATOR	NOTE 5	NATURAL	1	SMA1181A2-5T-50
4	CONTACT PIN	NOTE 3	NOTE 4	1	MMCX6121A1-4-085/04
3	BARREL	NOTE 1	NOTE 2	1	MMCX1181A1-3-3/224
2	INSULATOR	NOTE 5	NATURAL	1	MMCX6181A1-2T-50
1	BODY	NOTE 1	NOTE 2	1	MMCX6181A1-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES			MMCX6181A1-3GT30G-13-50	
0.5-6	= ±0.2	APPROVED	DATE	
6-30	= ±0.4	CHECKED	DATE	
30-120	= ±0.6	DRAWN	DATE	
120-315	= ±1		10-11-01'	
315-1000	= ±1.6		10-11-01'	
1000-2000	= ±2.4		10-11-01'	
SCALE	6/1	ISSUE	A	
FILE NO.				

Amphenol

TITLE MMCX STRAIGHT DIRECT SOLDER JACK
(FOR .047" SEMI-RIGID CABLE)

DRAWING NO. KJ-MMCX6181A1-3GT30G-.047-50

ITEM NO.