


Sockets for IC-PLCC

SMD sockets for PLCC - low profile housing

These sockets conform to EIA/JEDEC "A" package requirements for leaded plastic chip carriers.

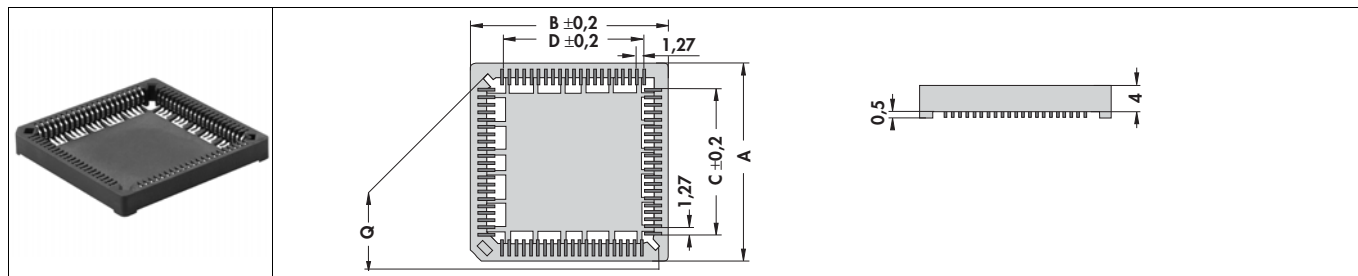

art. no.	no. of contacts	VPE	dim. [mm]				
			A	B	C	D	Q
PLCC 20 SMD	20	39	15.58	15.58	5.08	5.08	16.00
PLCC 28 SMD	28	32	18.12	18.12	7.62	7.62	20.60
PLCC 32 SMD	32	29	18.12	20.66	7.62	10.16	22.50
PLCC 44 SMD	44	26	23.40	23.40	12.70	12.70	27.50
PLCC 52 SMD	52	23	25.74	25.74	15.24	15.24	31.10
PLCC 68 SMD	68	19	30.82	30.82	20.32	20.32	38.80
PLCC 84 SMD	84	15	35.90	35.90	25.40	25.40	44.80

VPE = packing unit (pieces/tube)*dimensions ± 0.2 mm

Tin-plated phosphorbronze socket contacts.


colour: black

packing: bar magazine

- Dual polarisation indicators guarantee the correct alignment of the device.
- Drain holes for easier inside cleaning.
- Test probe holes are moulded next to each contact, providing easy access.
- Efficient heat dissipation.

Insulating material (PBT) UL 94 V-0 rated.

SMD-sockets for PLCC - low profile housing

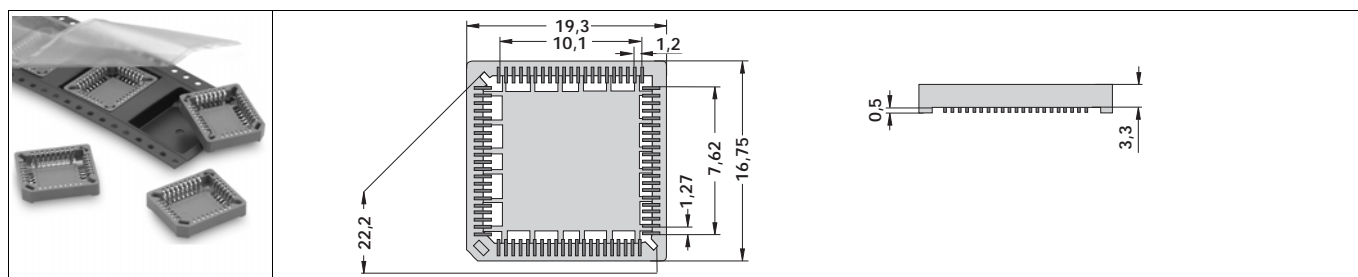

art. no.	no. of contacts
PLCC 32 LP SMD ...	32
please indicate:	... packing (option) SM = tube magazine TR = tape and reel (500 pcs/reel)