

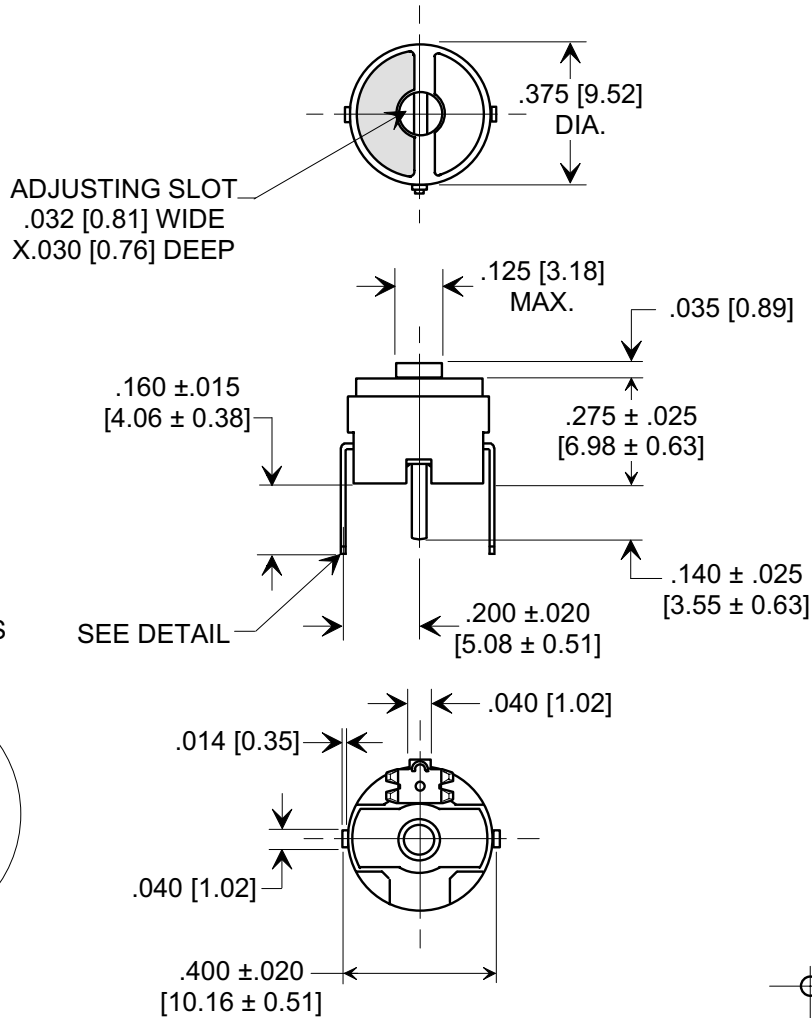




MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

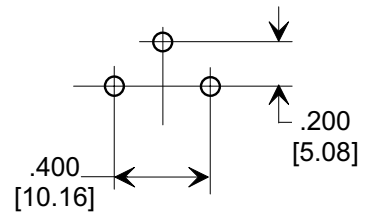

TERMINAL ENDS
TYP. (2) PLCS.



SUGGESTED .047 [1.19] DIA.
MOUNTING HOLES

NOTE: ALL METAL PARTS
SILVER PLATED

TOLERANCES:
≤ .125 [3.18] ± .015 [0.38]
≥ .126 [3.20] ± .030 [0.76]

SPECIFICATIONS

TUSONIX PART NO.	538-074 A 3.0 -15
Style No.	538-074
Capacitance Range	3.0-15 pF
Tolerance	MIN. + 10%, MAX. +100% -10%
Dielectric Type Code	A
Voltage Rating	350 VDC @ +85°C, 200 VDC @ +125°C
Operating Temperature Range:	-55°C TO + 125°C
To Tusonix Spec Unless Stated Otherwise	

X-2015 Rev-0 REVISION RECORD Original Release C.O. 20040127-3-01	0	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± 3 PLC. DECIMAL ± ANGLES ±	Title		CERAMIC TRIMMER
	Drawn		S.M. 01-27-04	Scale	
	Approved		B.Mc. 01-27-04		A 538-074 A 3.0-15
	TUSONIX TUCSON, ARIZONA				