


Direct Solder Type Cable Connectors for Semi-Rigid Cable

Straight Plug, Solderless Version, Without Center Contact\*

| Part Number     | Cable Number |
|-----------------|--------------|
| 055-624-6703890 | RG402/U      |


\* Center conductor of cable is used as contact.



Assembly Instruction AI-507 (Page 123)

Straight Plug, Solderless Version, With Center Contact


| Part Number     | Cable Number | A           |
|-----------------|--------------|-------------|
| 055-607-6702890 | RG405/U      | 2,20 (.088) |
| 055-607-6203890 | RG402/U      | 3,60 (.142) |



Assembly Instruction AI-521 (Page 123)


Right Angle Plug

| Part Number     | Cable Number | A           |
|-----------------|--------------|-------------|
| 055-611-3702890 | RG405/U      | 2,20 (.088) |
| 055-611-3703890 | RG402/U      | 3,60 (.142) |

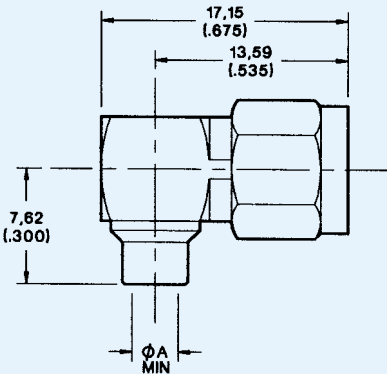

Assembly Instruction AI-98 (Page 111)

Flange Mount Panel Jack

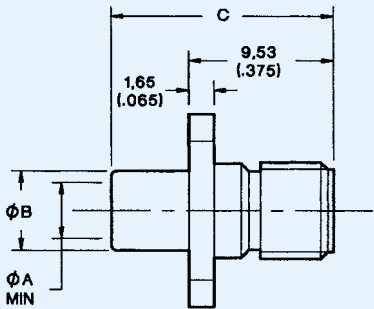

Assembly Instruction AI-278 (Page 117)

| Part Numbers    |                 | Cable Number | Dimensions  |             |              |
|-----------------|-----------------|--------------|-------------|-------------|--------------|
| Square Flange   | Narrow Flange   |              | A           | B           | C            |
| 055-604-9172310 | 055-604-9272310 | RG405/U      | 2,20 (.088) | 3,05 (.120) | 12,70 (.500) |
| 055-604-9173310 | 055-604-9273310 | RG402/U      | 3,60 (.142) | 4,68 (.184) | 14,28 (.560) |