

Material:

1. Plastic Material: LCP UL94V-0
2. Metal Material: C2680 R-H
3. Plating:
Terminal: Gold plated
Shell: Ni Plated 50 U" min overall.

SPECIFICATION:


1. Current Rating: 0.5 Amp
2. Current Voltage: 40V AC
3. Contact Resistance: 30 Milliohms max.
4. Insulator Resistance: 100 Megohms min.
5. Dielectric withstanding voltage: 500V AC (for 1 minute)
6. Operating Temperature: -25C° to 85C°
7. Durability: 5000 cycles min

Ordering Information:

8500 S 19 J T 1 0
1 2 3 4 5 6 7

RoHS COMPLIANT

1. Series No.
2. S: Socket
3. No. of circuits
4. Plating
J=Selective 15u" Gold
K=Selective 30u" Gold
5. Type of the shell:
T=Ground terminal is through hole type
M=Ground terminal is SMT type
6. Color:
0=White
1=Black
7. 0=Normal
1=With ear

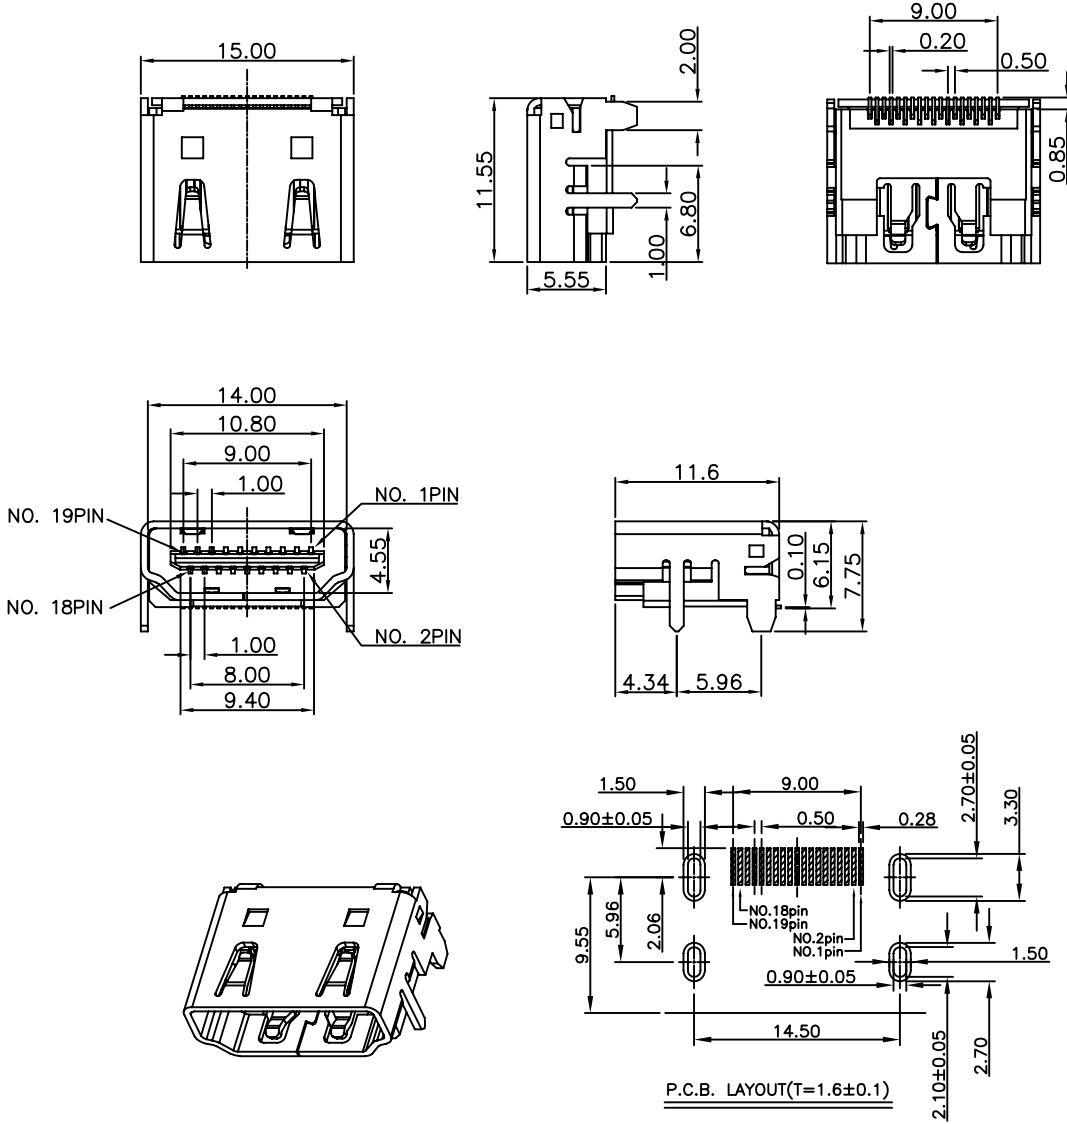

				leoco LEOCO CORPORATION		APPROVED:		PART NO.:					
				GENERAL TOLERANCES: (UNLESS SPECIFIED)		DATE:		8500S19*T10					
						CHECKED:		TITLE:					
						DATE:		HDMI socket					
						DRAWN:		DRAWING NO.:					
						DATE:		850004S					
				ANGULAR ± 1°				UNITS		SCALE	SIZE	SHEET	REV.
								mm inch			A4	1/1	A
REV.	ECO. NO.	CHG.	APP.										