

Applications


- Thermal protection of winding in electric motors

Features

- Thermistor pellet with insulating encapsulation
- Silver-plated and Teflon(PTFE)-insulated AWG 26 litz wires
- Trip temperature coded in litz wire color
- Characteristics for nominal threshold temperatures of 90 bis 160 °C conform with DIN 44 081
- Can be used in conjunction with Siemens tripping units

Max. operating voltage	$(T_A = 0 \dots 40 \text{ °C})$	V_{max}	30	V
Max. measuring voltage	$(T_A - 25 \text{ K} \dots T_{\text{NAT}} + 15 \text{ K})$	$V_{\text{Mes,max}}$	7,5	V
Rated resistance	$(V_{\text{PTC}} \leq 2,5 \text{ V})$	R_N	≤ 100	Ω
Insulation test voltage		V_{is}	2,5	kV ac
Response time		t_a	< 5	s
Operating temperature range	$(V = 0)$	T_{op}	$-25/+180$	$^{\circ}\text{C}$
	$(V = V_{\text{max}})$	T_{op}	0/40	$^{\circ}\text{C}$

Type	$T_{\text{NAT}} \pm \Delta T$ $^{\circ}\text{C}$	$R(T_{\text{NAT}} - \Delta T)$ $(V_{\text{PTC}} \leq 2,5 \text{ V})$ Ω	$R(T_{\text{NAT}} + \Delta T)$ $(V_{\text{PTC}} \leq 2,5 \text{ V})$ Ω	$R(T_{\text{NAT}} + 15 \text{ K})$ $(V_{\text{PTC}} \leq 7,5 \text{ V})$ Ω	$R(T_{\text{NAT}} + 23 \text{ K})$ $(V_{\text{PTC}} \leq 2,5 \text{ V})$ Ω
M 155	60 ± 5	≤ 570	≥ 570	—	≥ 10 k
M 155	70 ± 5	≤ 570	≥ 570	—	≥ 10 k
M 155	80 ± 5	≤ 570	≥ 570	—	≥ 10 k
M 155	90 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	100 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	110 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	120 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	130 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	140 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	145 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	150 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	155 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	160 ± 5	≤ 550	≥ 1330	≥ 4 k	—
M 155	170 ± 6	≤ 550	≥ 1330	≥ 4 k	—
M 155	180 ± 6	≤ 550	≥ 1330	≥ 4 k	—


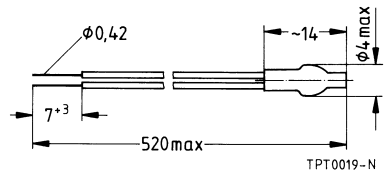


Dimensions in mm



Type	Color coding of litz wires	Ordering code
M 155	white/grey	B59155-M60-A70
M 155	white/brown	B59155-M70-A70
M 155	white/white	B59155-M80-A70
M 155	green/green	B59155-M90-A70
M 155	red/red	B59155-M100-A70
M 155	brown/brown	B59155-M110-A70
M 155	grey/grey	B59155-M120-A70
M 155	blue/blue	B59155-M130-A70
M 155	white/blue	B59155-M140-A70
M 155	white/black	B59155-M145-A70
M 155	black/black	B59155-M150-A70
M 155	blue/black	B59155-M155-A70
M 155	blue/red	B59155-M160-A70
M 155	white/green	B59155-M170-A70
M 155	white/red	B59155-M180-A70

Characteristics (typical)

PTC resistance R_{PTC} versus PTC temperature T_{PTC}
 (measured at low signal voltage)

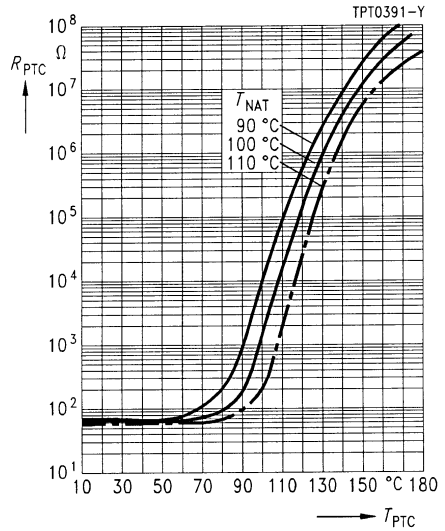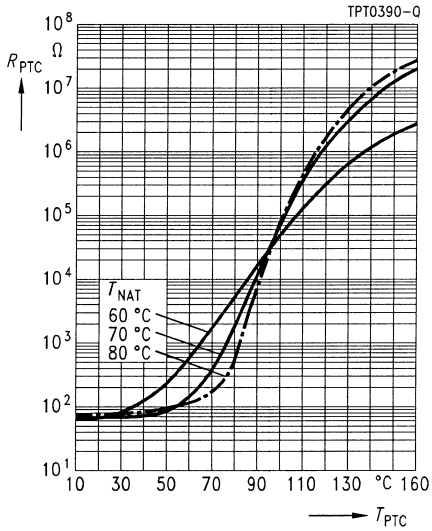

PTC resistance R_{PTC} versus PTC temperature T_{PTC}
 (measured at low signal voltage)

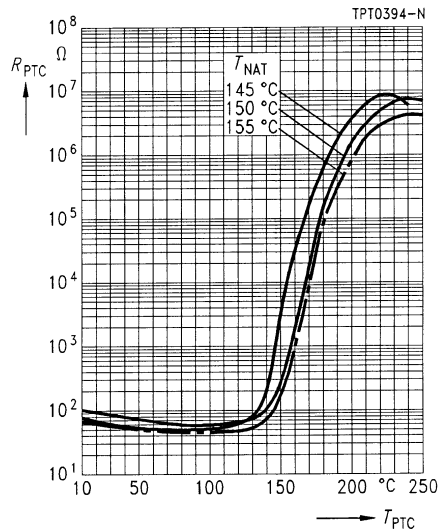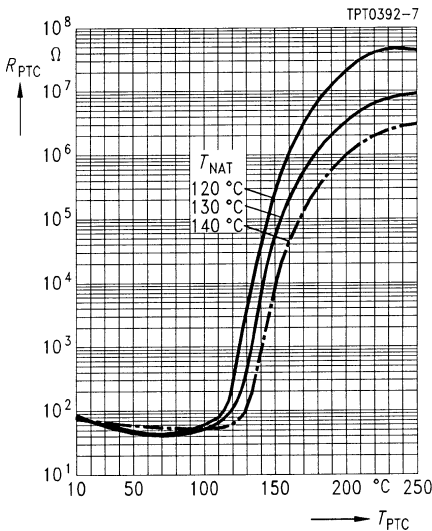

Characteristics (typical)

PTC resistance R_{PTC} versus PTC temperature T_{PTC}
(measured at low signal voltage)

