

**AE-X0A5XXXX Series
SINEWAVE/CMOS HF XO**

Rev. -


Description

The **AE-X0A5XXXX Series** of crystal oscillators (XO) provides high frequency with Sine-Wave or CMOS output. The device provides exceptionally low Phase Noise and Jitter. It's packaged in a miniature, FR-4 based 17x14 mm SMD package

Applications and Features

- Frequency Synthesizers, Low Phase Noise Reference
- High Reliability – NEL HALT/HASS qualified for crystal oscillator start-up conditions
- Extremely Low Phase Noise and Jitter
- RoHS compliant
- SONET ± 20 ppm overall free-run stability available
- High Shock Resistance, to 1000g

Creating a Part Number

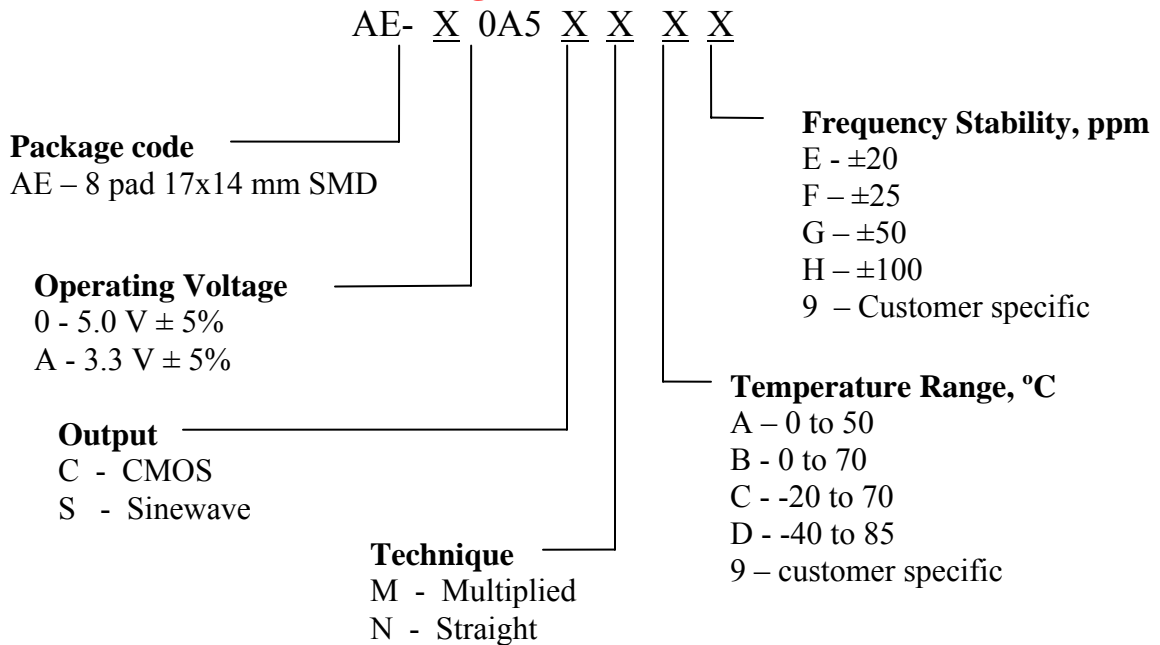

**FREQUENCY
CONTROLS, INC.**


357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com

AE-X0A5XXXX Series

Rev. -

Drawing Specification

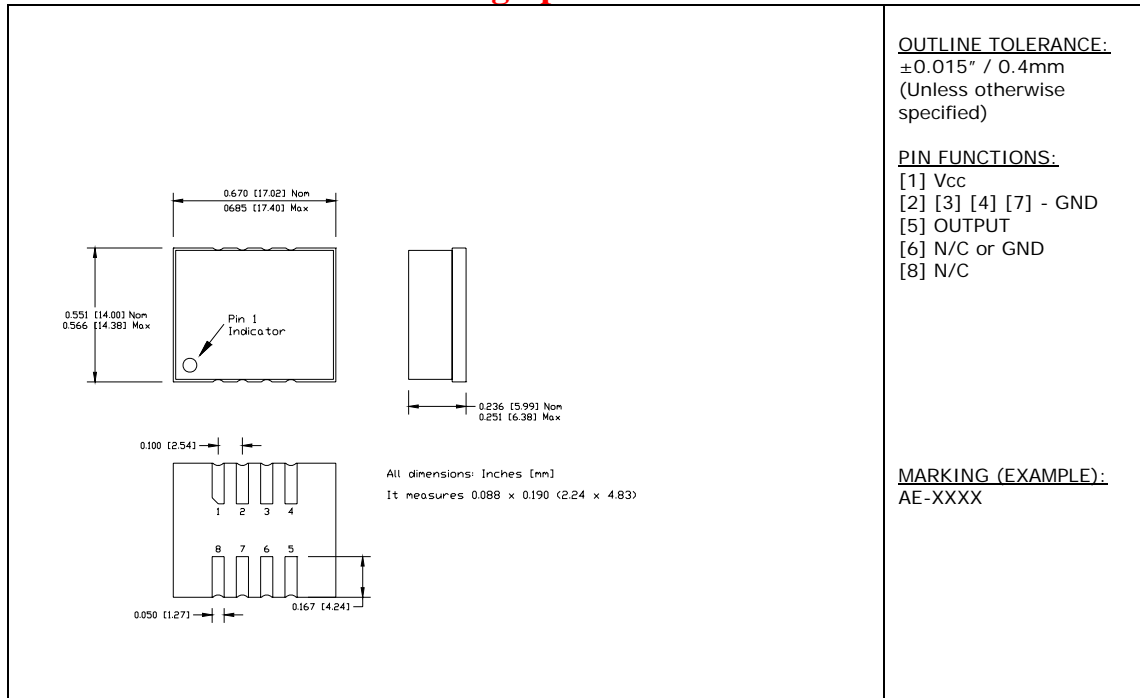

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Operating Temperature Range	To	-40 to +85	°C
Storage Temperature Range	Tst	-50 to +90	°C
Supply Voltage	Vcc	-0.5 to 5.5	V



**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com

AE-X0A5XXXX Series

Rev. -

Electrical Parameters

Parameter		Symb	Conditions, Note	MIN	TYP	MAX	Unit
Nominal Frequency		Fo	See Note below	12		250	MHz
Supply Voltage		Vcc	Code 0 Code A	4.75 3.135	5.0 3.3	5.25 3.465	V
Supply current		Icc	No load, Vcc=3.3V 100MHz		60	160	mA
Output Logic Type			S version C version		Sine CMOS		
Load			Internally AC coupled	45	50	55	Ohm
Harmonic		Ph				-25	dBc
Sub-Harmonics			N version	None			
Sub-Harmonics			M version		-50	-45	dBc
Output Power		Po	S version Into 50 ohm,5V 3.3V	7 5	10 7		dBm
Logic Levels		Vol Voh	C version	0.9Vcc		0.1Vcc	V
Jitter	Integrated, RMS	J	Integrated from Phase Noise, 12 KHz to 20 MHz RMS		0.1	0.15	ps
			100Hz to 80KHz,RMS			0.5	ps
			50 KHz to 80 MHz		0.2		ps
	Wavecrest characterized	J	Random period,		2.5		ps
			Accumul., pk-to-pk		17		ps
			Determin.	N version M version @ 100MHz	0 10		ps
Phase Noise, N version		£(Δf)	100 MHz, 3.3V	@ 10 Hz @100 Hz @1 KHz @10KHz @100KHz @>1MHz	-85 -115 -145 -170 -172 -175	-80 -110 -140 -168 -170 -172	dBc/Hz
Phase Noise, M version, Sinewave only		£(Δf)	100 MHz, 3.3V	@ 10 Hz @100 Hz @1 KHz @10KHz @100KHz @>1MHz	-95 -125 -145 -160 -162 -165	-90 -120 -140 -158 -160 -162	dBc/Hz
Frequency Stability, overall conditions		ΔF/F	See chart		±50		ppm



**FREQUENCY
CONTROLS, INC.**


357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com

AE-X0A5XXXX Series

Rev. -

Typical Phase Noise at 100 MHz

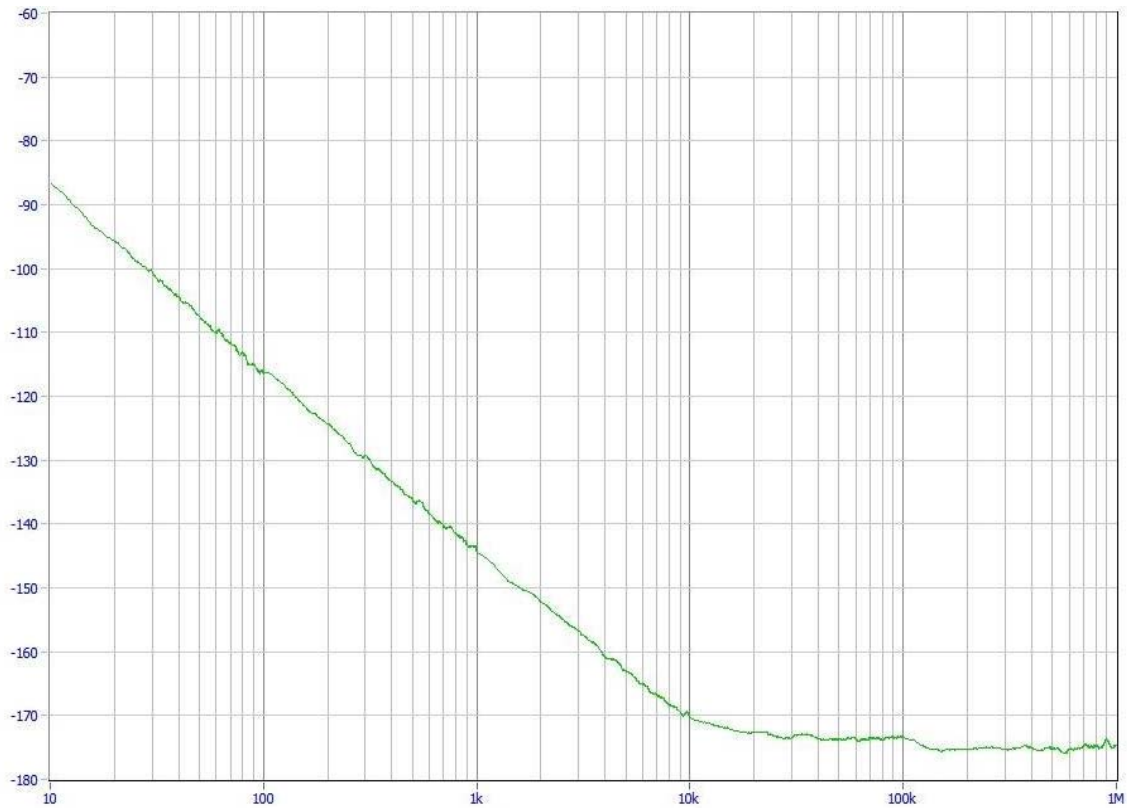

AE-X0A5NXXXX "N" Non-multiplied version



**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com


AE-X0A5XXXX Series

Rev. -

Environmental and Mechanical Characteristics

Operating temp. range	see part # table
Mechanical Shock	Per MIL-STD-202, Method 213, Cond. A
Thermal Shock	Per MIL-STD-883, Method 1011, Cond. A
Vibration	Per MIL-STD-883, Method 2007, Cond. A
Hermetic Seal	Leak rate less than 5×10^{-8} atm.cc/s of helium , crystal only.
Soldering conditions	See MAX reflow profile below

MAX Reflow Profile

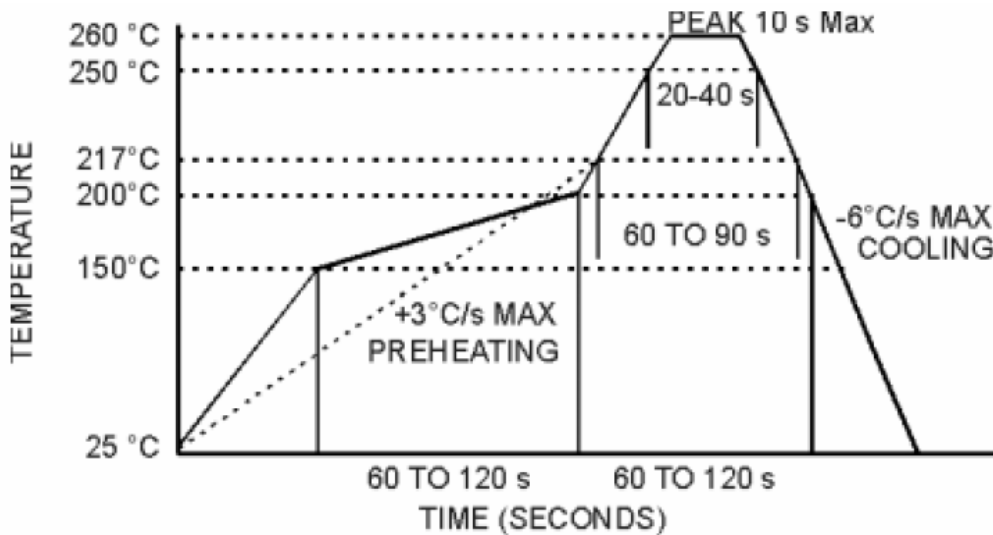

**FREQUENCY
CONTROLS, INC.**

357 Beloit Street, P.O. Box 457, Burlington, WI 53105-0457 U.S.A. Phone 262/763-3591
FAX 262/763-2881

Email: nelsales@nelfc.com www.nelfc.com