


OS-2.4 (OS-50)

DC-50 GHz • For Stripline Circuits

End Launch • Tab Terminal



Flange Mount Plug Receptacle

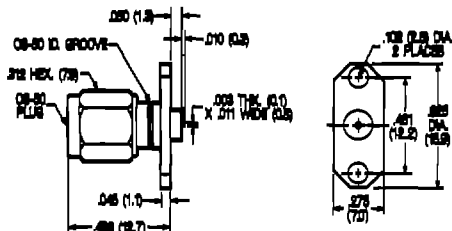


Captured Center Contact	
Part Number:	8081-8001-02

Suggested Stripline Parameters:
 Ground Plane Spacing: 0.80, 0.86 inches
 Line Width: 0.12, 0.16 inches
 Dielectric Constant (Dk): 2.2
 Finish: Passivated stainless steel
 Recommended Mounting Hole Detail II.



Flange Mount Jack Receptacle

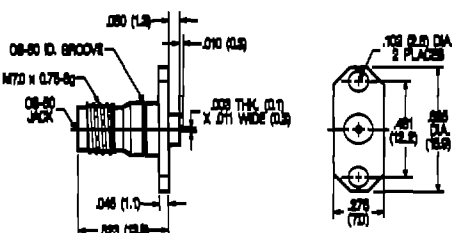


Captured Center Contact	
Part Number:	8082-8001-02

Suggested Stripline Parameters:
 Ground Plane Spacing: 0.80, 0.86 inches
 Line Width: 0.12, 0.16 inches
 Dielectric Constant (Dk): 2.2
 Finish: Passivated stainless steel
 Recommended Mounting Hole Detail II.




Flange Mount Plug Receptacle

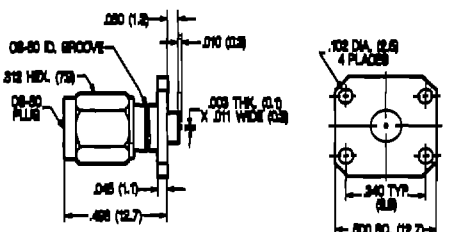


Captured Center Contact	
Part Number:	8081-8002-02

Suggested Stripline Parameters:
 Ground Plane Spacing: 0.80, 0.86 inches
 Line Width: 0.12, 0.16 inches
 Dielectric Constant (Dk): 2.2
 Finish: Passivated stainless steel
 Recommended Mounting Hole Detail II.



Flange Mount Jack Receptacle

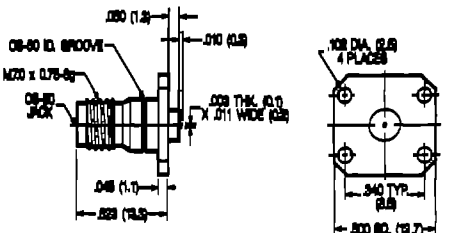

Captured Center Contact	
Part Number:	8082-8002-02

Suggested Stripline Parameters:
 Ground Plane Spacing: 0.80, 0.86 inches
 Line Width: 0.12, 0.16 inches
 Dielectric Constant (Dk): 2.2
 Finish: Passivated stainless steel
 Recommended Mounting Hole Detail II.