


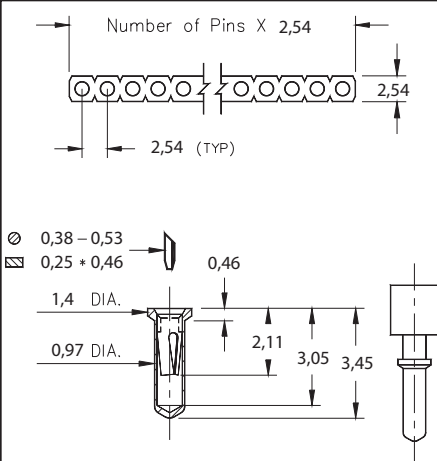


Fig. 1

- Ultra low profile receptacles sit 0,46 above the board.
- Series 714 uses M-M# 0552-1, 0552-2 pin receptacles. See page 127 for details.
- Hi-Rel, 3-finger BeCu #11 clip is rated at 3amps. See page 206 for details.

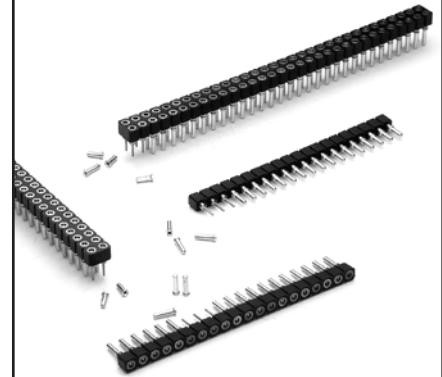

Ordering Information

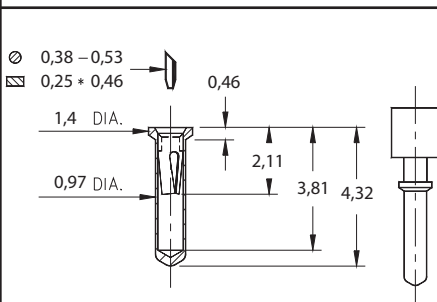


Fig. 2

Fig. 1

Single Row (0,99 min. mounting hole)

714-XX-1_ _-31-012000
Specify # of pins → 01-64

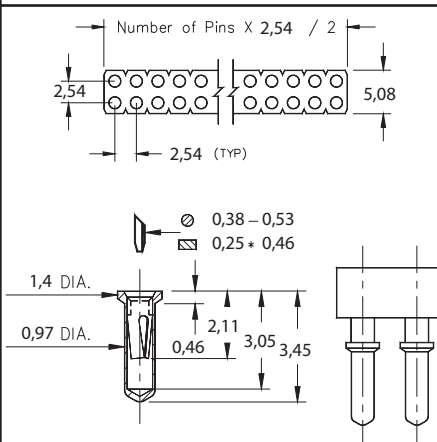


Fig. 3

Fig. 2

Single Row (0,99 min. mounting hole)

714-XX-1_ _-31-018000
Specify # of pins → 01-64

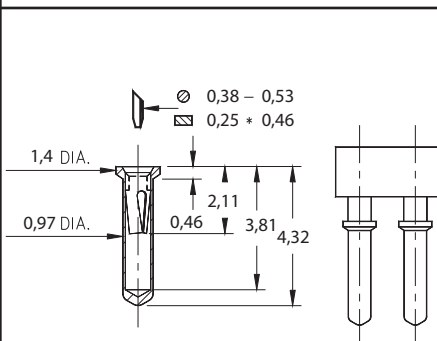


Fig. 4

Fig. 3

Double Row (0,99 min. mounting hole)

714-XX-2_ _-31-012000
Specify # of pins → 02-64

Double Row (0,99 min. mounting hole)

714-XX-2_ _-31-018000
Specify # of pins → 02-64

XX=Plating Code
See Below



For RoHS compliance, select $\diamond$ plating code. For the all gold option (XX=13) also change part number from 714-XX-XXX-31-01X000 to 714-13-XXX-31-01X100

SPECIFY PLATING CODE XX=	13 $\diamond$		93	99		43 $\diamond$	44 $\diamond$
Sleeve (Pin)	0,25 μ m Au		5,08 μ m Sn/Pb	5,08 μ m Sn/Pb		5,08 μ m Sn	5,08 μ m Sn
Contact (Clip)	0,76 μ m Au		0,76 μ m Au	5,08 μ m Sn/Pb		0,76 μ m Au	5,08 μ m Sn