

This drawing is copyright. Information contained thereon is supplied in confidence and must not be used for any other purpose than which it was supplied, or be reproduced without written permission of the owners.



Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere ausdrückliche Einwilligung weder kopiert, vervielfältigt, noch Dritten oder Konkurrenzfirmen zugänglich gemacht werden.

type : 11 MCX-50-1-13

	date	sign
drawn	27.01.99	4540/PM
checked	30.3.99	4587/JL
approved	22.4.99	4587/JL

cable shortening dimension

scale 1.5:1

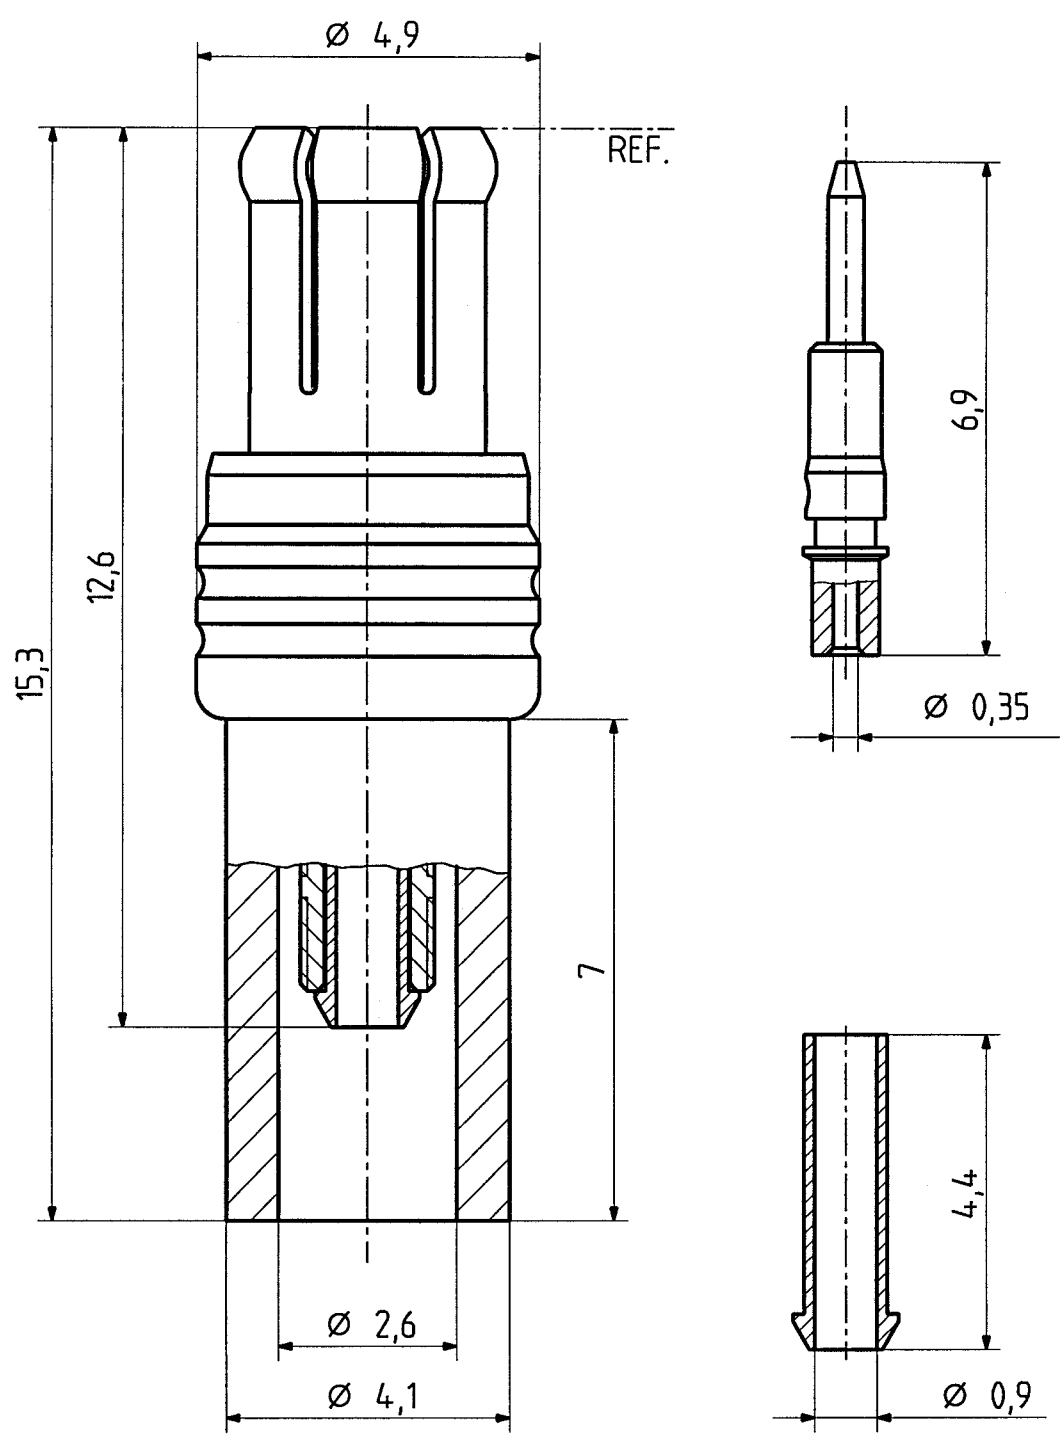

H+S 701 448.05

scale  
10:1

HUBER + SUHNER RFX

drawing number  
4.13.31365

Index  
a

dimensions in mm

OZ drawing :

- [RF Products](#)
- [FO Products](#)
- [Energy+Signal  
Transmission](#)
- [Polymer Solutions](#)
- .....
- Search categories
- [RF cable connectors](#)
- [RF panel connectors](#)
- [RF print connectors](#)
- [RF adaptors](#)
- [RF in-series adaptors](#)
- [RF coaxial cable](#)
- [RF low-noise cable](#)
- [RF lightning protector](#)
- [FO cable connectors](#)
- [FO adaptors](#)
- [FO cables](#)
- .....

**Article number:****Type:****SUHNER Type:****11 MCX-50-1-13 / 111 NH**[Picture](#)

Article Number: 23002830

Series: MCX

**Cable Type:**[RG 178 B/U](#) , [RG 196 A/U](#)

Cable entry:

outer contact: crimped

center contact: crimped

**Electrical Data:**

Impedance: 50 Ω

Frequency Range: DC ... 6.00 GHz

**Material Data:****Material****Surface Plating**

Center contact: Brass

Gold / nickel underplated

Outer contact: Copper-Beryllium

Gold / nickel underplated

Body: Brass

Gold / nickel underplated

Insulator: PTFE/PFA

Crimp Ferrule: Copper

Gold / not nickel underplated

**General Information:**

Interface according to: IEC 60169-36\_CECC 22220

Weight: 1.1 g/0.04 oz

Packaging: Bulk 100 pcs

**Attachment:**Outline drawing: [S31365](#)Assembly Instruction: [M27316](#)