# MICRO Junction and Distribution Connectors (for EIB applications only)

| | |
|---|---|
| 4 x 0.6 – 0.8 mm Ø "s" or 4 x 1.0 mm Ø "s"<br>100 V ~<br>6 A<br>5 – 6 mm / 0.22 in<br>* VDE | 4 x AWG 22 – 20 "solid" or 4 x AWG 18 "solid"<br>125 V, 7 A<br>150 V, 7 A |

| | |
|---|---|
| 4 x 0.6 – 0.8 mm Ø "s" or 4 x 1.0 mm Ø "s"<br>100 V ~<br>6 A<br>5 – 6 mm / 0.22 in<br>* VDE | 4 x AWG 22 – 20 "solid" or 4 x AWG 18 "solid"<br>125 V, 7 A<br>150 V, 7 A |

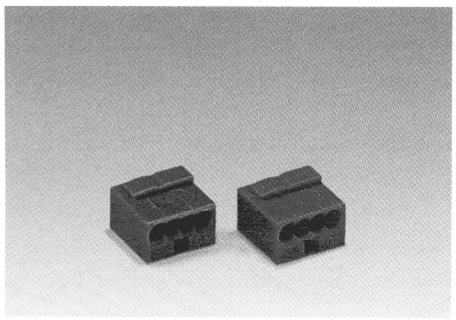

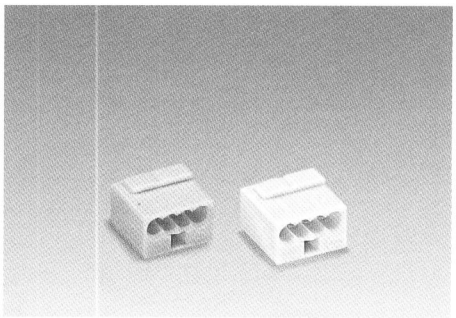

| Color | Item-No. | Pack.-unit pcs |
|---|---|---|
| **MICRO junction and distribution connectors for EIB applications,** 4-conductor connectors | | |
| dark grey | **243-214** | 400 |
| red | **243-814** | 400 |

| Color | Item-No. | Pack.-unit pcs |
|---|---|---|
| **MICRO junction and distribution connectors for EIB applications,** 4-conductor connectors | | |
| light grey | **243-314** | 400 |
| yellow | **243-514** | 400 |







## Other WAGO terminal blocks in appliances of the EIB system

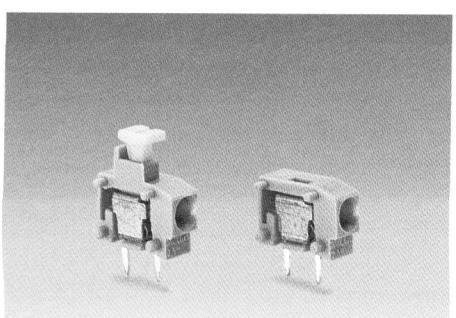

◄ WAGO PCB terminal blocks series 235 with push-wire contact for solid copper wires (see pages 2.68 – 2.75)

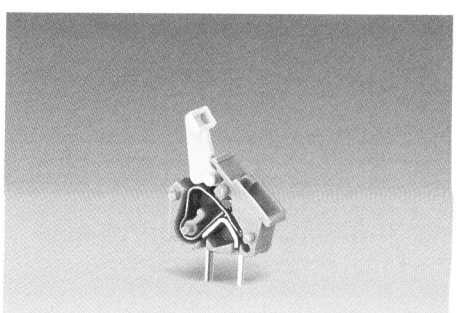

WAGO PCB terminal blocks series 256 with CAGE CLAMP® for solid, stranded and fine-stranded copper wires (see pages 2.12 – 2.13) ►