

SRSI10-T35-GLI115VAC-HTD

- 2 Connections
- With screw cap / glow lamp
- Temperature range up to 140°C



A Phoenix Mecano Brand

Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6 GV 20
Solid max	10.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	10.0 mm ²	Working Temperature	-40 - 140 °C
Stranded (flexible) min	0.2mm ²	Dimensions	
Stranded (flexible) max	10.0 mm ²	Stripped Length	12.0 mm
Stranded with Ferrule min	0.2 mm ²	Width	12.2 mm
Stranded with Ferrule max	10.0 mm ²	Length	52.0 mm
Clamping Range min	0.2mm ²	Height TS35 x 7.5	62.0 mm
Clamping Range max	10.0 mm ²		

Electrical Data


General

Test Pick off	1
---------------	---


Electronic Components

Rated Voltage AC	115 V
------------------	-------

Colours

 BLACK, similar RAL 9011

Connection Diagram

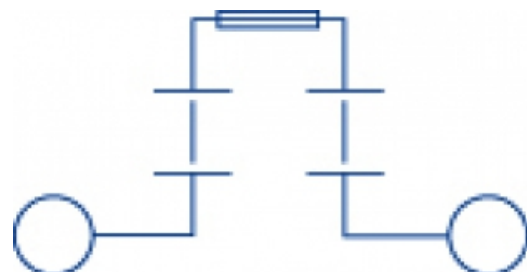

Order Data

Article Designation	Article Number	PU
SRSI10-T35-GLI115VAC-HTD-BK	41376.4	20

Accessoires

Article Designation	Article Number	PU
End Plate AP-SI	492047.4	20
Schraubkappe (Ersatz) SKA5x20	492049.2	50
Cross-Connection Rail QS2	492366.0	100
Cross-Connection Rail QS3	492367.0	100
Cross-Connection Rail QS4	492368.0	50
Cross-Connection Rail QS10	492369.0	10
Mounting Screw B5-M3x6	492365.0	100
End Stopn E535/K/ST	492828.0	50
Quick Labelling PSB8/40	499323.7	400

Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage			
Rated Current			
Rated Wire Size			10.0 mm ²
Rated Impulse Voltage			4 V
Pollution Degree			3