



| DATE | SYM | REVISION | RECORD | AUTH. | DR. | CK. |
|------|-----|----------|--------|-------|-----|-----|
|      |     |          |        |       | NT  |     |
|      |     |          |        |       |     |     |
|      |     |          |        |       |     |     |
|      |     |          |        |       |     |     |

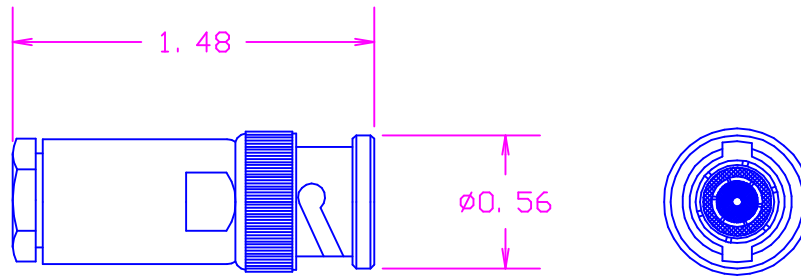

MATERIAL: BODY- BRASS PER QQ-S-626,  
 ALLOY 360, 1/2 HARD  
 MALE CONTACT- BRASS PER QQ-B-626,  
 ALLOY 360, 1/2 HARD  
 INSULATION- PTFE, ASTM D1457  
 GASKET- SILICON RUBBER PER ZZ-R-465a  
 CLASS IIa, GRADE 50  
 FINISH: BODY- TR-5 ALLOY ELECTRODEPOSIT FINISH.  
 CENTER CONTACT- .0001"MIN. HARD GOLD PLATE  
 PER MIL-G-45204B

ACTUAL SIZE



|                        |                                 |                                  |  |
|------------------------|---------------------------------|----------------------------------|--|
| TOLERANCES             | CONCORD ELECTRONICS CORPORATION |                                  |  |
| DECIMAL<br>+<br>- .010 | P/N                             | SCALE                            | 30 GREAT JONES ST.<br>NEW YORK N. Y. 10012 |
| FRACTIONAL<br>+<br>-   | TITLE TRIAXIAL MALE CABLE PLUG  |                                  |  |
| ANGULAR<br>+<br>-      | DATE<br>3-20-98                 | DRAWING NUMBER<br>800-2493-03-81 |  |