


MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.

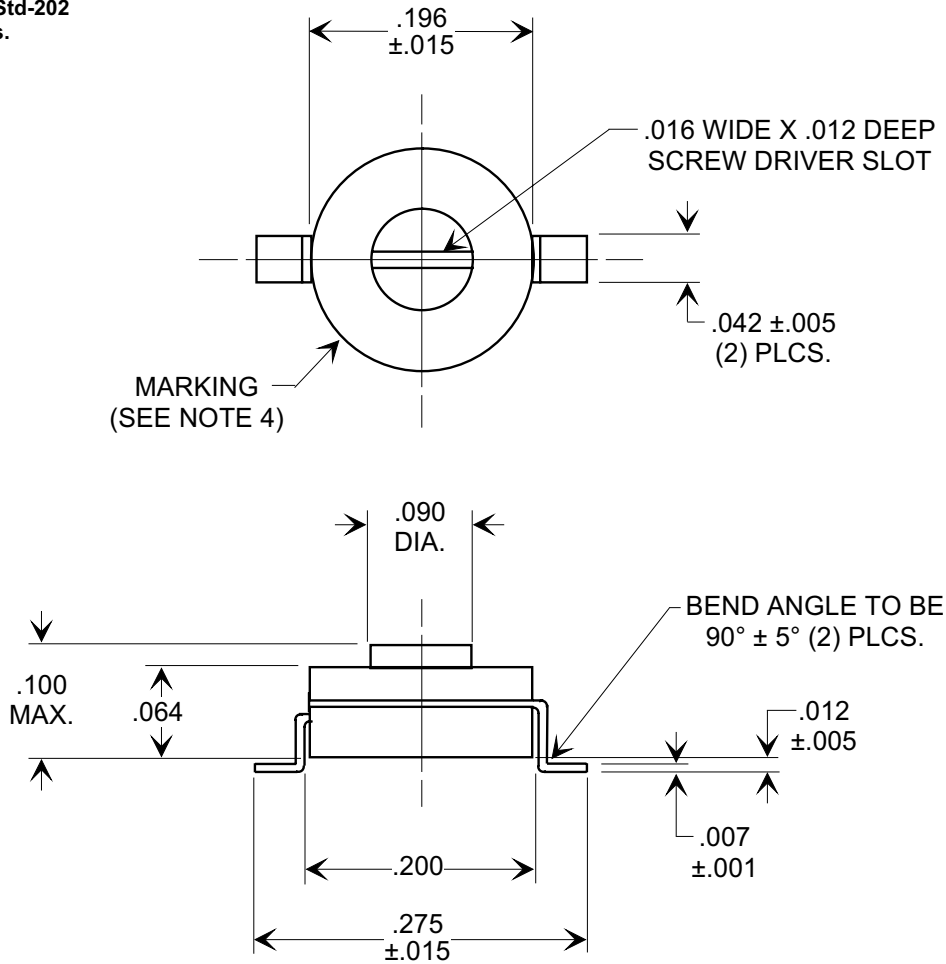

SPECIFICATIONS

TUSONIX PART NO.	513-019A10.0-42
Value:	10.0-42pF
Value Tol.:	SEE NOTE 3
Temp. Coef.:	NPO
Rating:	100 VDC
Operating Range:	-55°C TO + 85°C
To Tusonix Spec Unless Stated Otherwise	

NOTES:

- LEADS TO BE SILVER PLATED COPPER
- TAPE AND REEL PER EIA-481-A.
- MINIMUM CAPACITANCE VALUE NOT TO EXCEED +10% OF MINIMUM RATING AND THE MAXIMUM RATED CAPACITANCE NOT TO BE LESS THAN RATED MAXIMUM CAPACITANCE.
- BLACK COLOR CODE TO BE PERMANENT MARKER ON SHAFT OR ROTOR.

X-2015 Rev-0 REVISION RECORD Original Release C.O. 19981125-1-01 0	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$ 3 PLC. DECIMAL ± .031		Title LOW PROFILE CERAMIC TRIMMER	
	ANGLES ± $\frac{\quad}{\quad}$		Drawn E.C.11-25-98 Scale 6 X	
	TUSONIX TUCSON, ARIZONA		Approved T.C.11-25-98	
			A	513-019A10.0-42