


SPECIFICATIONS



Voltage rating: 250VAC/VDC
 Current rating: 5 amps AC/DC
 Contact material: Brass
 Contact plating: Tin
 Contact resistance: 10 milliohms max.
 Housing material: LCP
 Withstanding: 1,500VAC/1 min.
 Operating temperature: -25°C to +85°C

| Dimensions | | |
|------------|------|-------|
| Pos. | A | B |
| 2 | — | 6.65 |
| 4 | 3.0 | 9.65 |
| 6 | 6.0 | 12.65 |
| 8 | 9.0 | 15.65 |
| 10 | 12.0 | 18.65 |
| 12 | 15.0 | 21.65 |
| 14 | 18.0 | 24.65 |
| 16 | 21.0 | 27.65 |
| 18 | 24.0 | 30.65 |
| 20 | 27.0 | 33.65 |
| 22 | 30.0 | 36.65 |
| 24 | 33.0 | 39.65 |

Board lock option

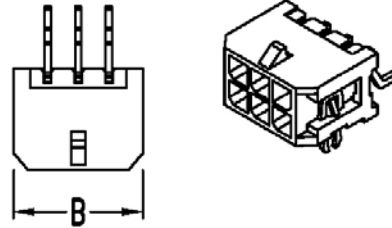

Mounting tab option

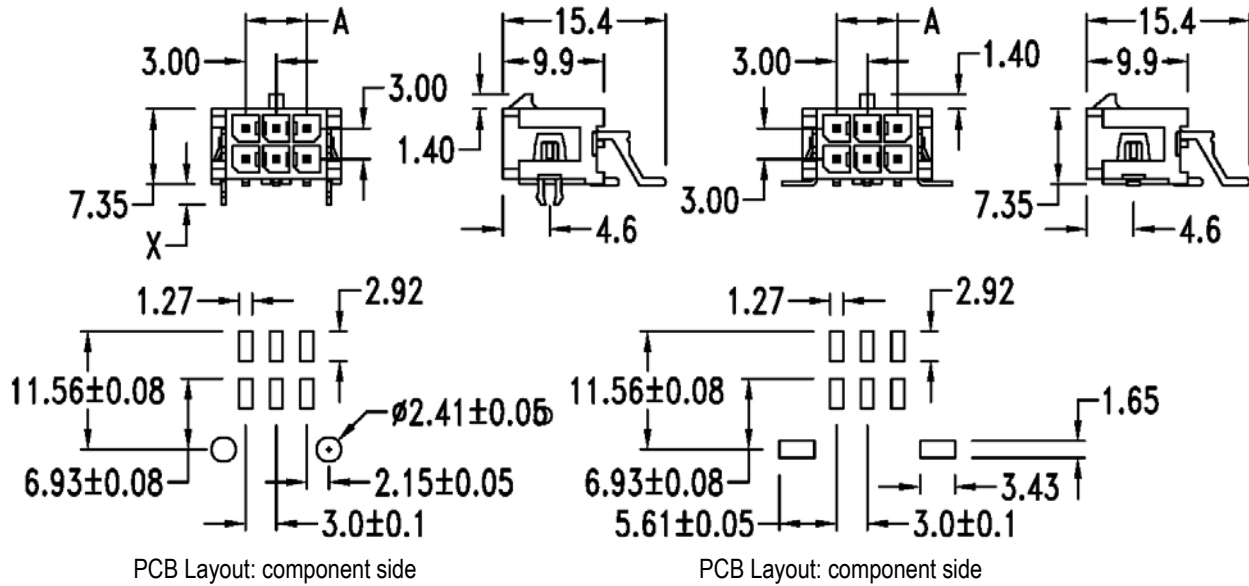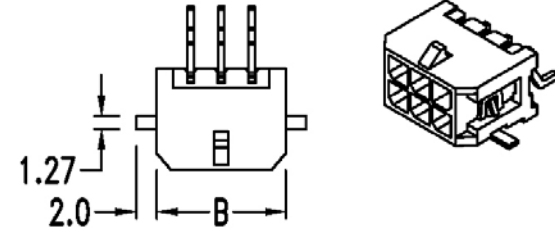

RoHS compliant

| Series | Style | Positions | Options |
|---------------------|------------|--|---|
| JS-A | 3048 | XX | XX |
| Pluggable connector | 3048 style | 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24 | BL1=2mm board lock BL2=3.2mm board lock MT=Mounting tab |

| Rev. | Description | Date | Approved | Drawing | Name | Date |
|------|-------------|------|----------|------------|-------------|-------------|
| | | | | Approved | Howard | 10/05/05 |
| | | | | Checked | Lizzy | 10/05/05 |
| | | | | Drawn | Tina | 10/05/05 |
| | | | | 0.0 ± 0.35 | 0.00 ± 0.20 | Angles ± 3' |
| | | | | UNIT: mm | | |

Central Components Manufacturing
 440 Lincoln Blvd., Middlesex, New Jersey 08846
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3048-XX-XX**

Description: .118" (3.0mm) right angle header, surface mount