

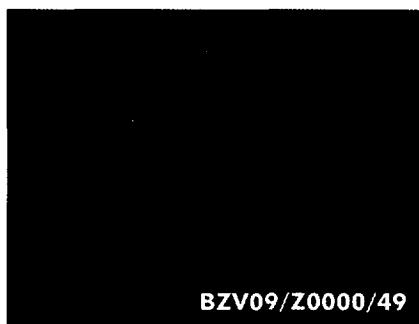


BULGIN Polysnap® Power Inlet Modules


IEC Inlet/Outlet + Circuit Breaker

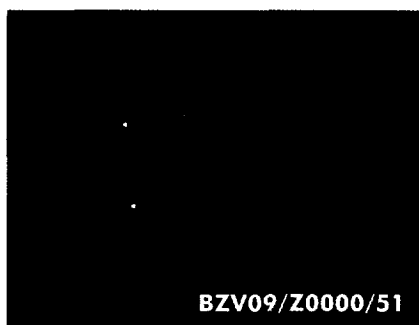

- Snap to Panel Moulding
- Vertical Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Double Pole Circuit Breaker
- Filtered Inlet Option

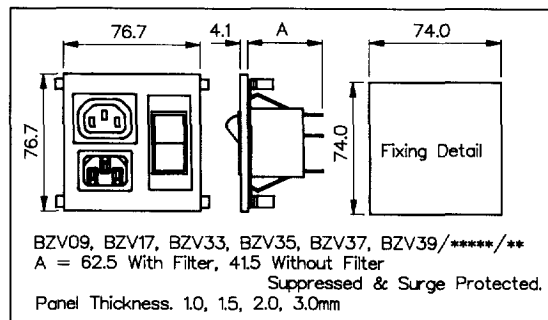

- Screw to Panel Mounting
- Vertical Module Arrangement
- Snap-in Components
- Inlet Variations (with various tag sizes)
- Double Pole Circuit Breaker
- Filtered Inlet Option

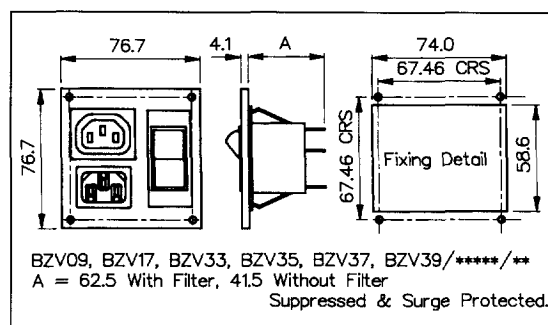

How to Order

BZV xx / xxxxx / xx / x

Type of Inlet / Outlet	Filtered or Non Filtered Inlet	Circuit Breaker and Bezel Style	Current Rating
Power Inlet (cold condition) and Power Outlet: 09 = PX0575/63 + PX0695/63	Z0000 = Non Filtered Axxxx = Standard Bxxxx = Medical Cxxxx = High Performance Standard Dxxxx = High Performance Medical Exxxx = Earth Line Choke	Double Pole Circuit Breaker, Snap to Panel Bezel: 49 = Single Pole Sensing, Snap to Panel Bezel 50 = Double Pole Sensing Snap to Panel Bezel	K = 2.0A L = 2.5A M = 3.0A Q = 5.0A T = 8.0A U = 10.0A
Suppressed Power Inlet (cold condition) and Power Outlet: 33 = PXS575/63 + PX0695/63	For Filtered inlet use 6th to 9th characters from filter ordering code see pages 75-79. E.g. BZV09/A0120/49K	Double Pole Circuit Breaker, Screw to Panel Bezel: 51 = Single Pole Sensing Screw to Panel Bezel 52 = Double Pole Sensing Screw to Panel Bezel	
Surge Protected Power Inlet (cold condition) and Power Outlet: 35 = PXT575/63 + PX0695/63			
Suppressed Power Inlet (cold condition) and Shuttered Power Outlet: 37 = PXS575/63 + PX0783/63			
Surge Protected Power Inlet (cold condition) and Shuttered Power Outlet: 39 = PXT575/63 + PX0783/63			

Note: For technical details of individual components please see page 54