



PARALLEL NETWORK WITH 20 dB MONITOR PORT

CENTRAL OFFICE PRODUCT SOLUTIONS - ALL TRUE 75 OHM

The parallel network serves as an equal level cross-connect point for coax signals conforming to the following signal formats.

- 2.048 Mbits
- 8.448 Mbits
- 34.048 Mbits
- 139.264 Mbits CEPT 1,2,3 and 4
- 155.520 Mbits STM 1


This 75Ω network permits access to all equipment terminated at the DDF frame. The network mounts to various configurations (both horizontal and vertical), serves as an easy access to circuit rearrangements and provides for cross connects on the front or the rear.

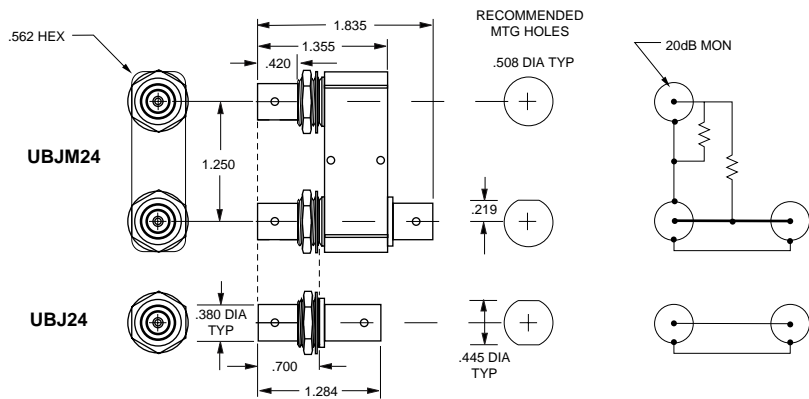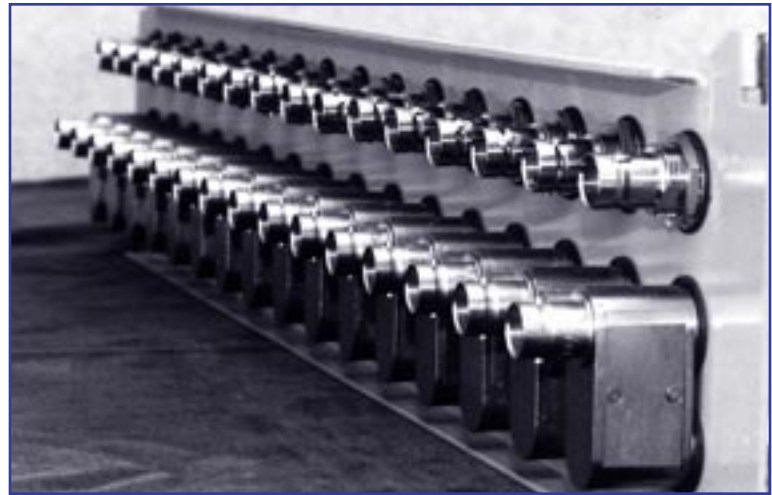

75Ω PARALLEL NETWORK

UBJM24 BNC Panel Mount with 20dB Monitor Port

UBJ24 BNC Panel Mount, Feed-Through

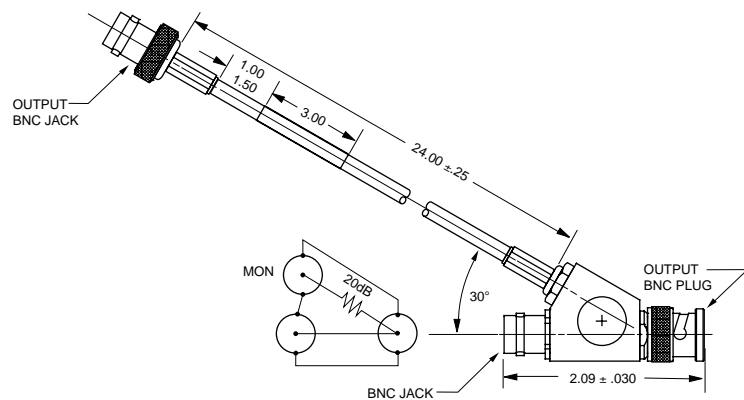

75Ω PARALLEL NETWORK

105-1513 Dual Monitor Interconnect Module with 20dB Monitor Ports