


LTR	REVISION	DATE	APPD
-	RELEASED	01-21-08	

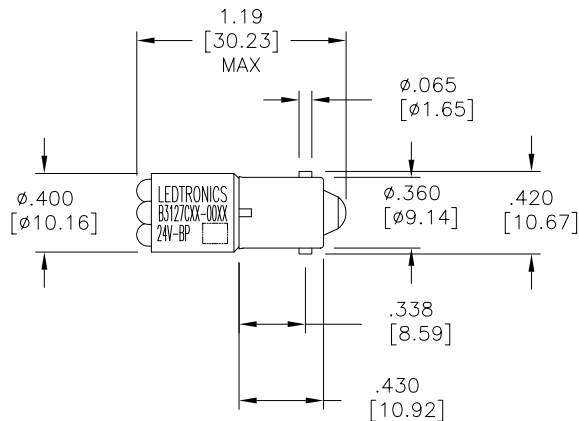

**NOTES:**

1. PARTS WITH (\*) ARE "RoHS" CERTIFIED.
2. SLEEVE MATERIAL: RYNITE FR530 (UL94V-1 MINIMUM, UL94V-0 PREFERRED)
3. BASE MATERIAL: SHELL (BODY) IS MADE FROM BRASS WITH NICKEL-PLATED (BAREL)

REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

B3127CG5-0003*	B3127CG5-24V/30-BP	HI-EFF GREEN	24V	25/29	566	1020	50°	*
B3127C05-0006*	B3127C05-24V/30-BP	ORANGE	24V	25/27	607	-	50°	*
B3127CR6-0015*	B3127CR6-24V/30-BP	ULTRA RED	24V	25/27	654	1300	50°	*
B3127CW5-0007	B3127CW5-24V/30-BP	HI-EFF RED/HI-EFF GREEN	24V	25/27	642/566	-	50°	
B3127CWA5-0003	B3127CWA5-24V/30-BP	YELLOW	24V	25/27	585	-	50°	
B3127CWG5-0005*	B3127CWG5-24V/30-BP	HI-EFF GREEN	24V	25/27	566	-	50°	*
B3127CY5-0014*	B3127CY5-24V/30-BP	YELLOW	24V	25/27	585	480	50°	*
B3127CY6-0002*	B3127CY6-24V/30-BP	YELLOW	24V	25/27	585/596	-	50°	*
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	SET VOLTS	READ mA typ./max.	λP nm	INTENSITY (mcd)	ILLUMINATION ANGLE	
<b>ELECTRICAL TEST</b>								



**-PROPRIETARY-**  
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XX ± .010 TOLERANCE PER ANSI-Y14.5  
 .XX ± .025 (UNLESS OTHERWISE STATED)  
 ANGLES ± 0°,30'  
 FRACT. ± 1/32

TITLE <b>B3127CXX-24V/30-BP</b>						
DWG NO B3127-24V-BP		SCALE 1:1	SHEET 1 OF 1		DATE 01-21-08	
CODE IDENT NO. 8Z410	DWG BY GP	CHK BY PL	QA JCH	MNFG 01-23-08	CUSTOMER 01-22-08	