

USB TYPE A Plug
ID: 415


USB - A - 0450

Series 730



TECHNICAL DATA

Insulating Material	Thermoplast, high temp. thermoplast UL94V-0
Contact Material	phosphor bronze
Rated Current	0,5 Amp.
Rated Voltage	40 V
Withstanding Voltage	500 V _{AC}
Operating Temperature	-25°C to +85°C
Maximum Soldering Temperature	L: 230°C for 5 seconds, U: 260°C for 10 seconds

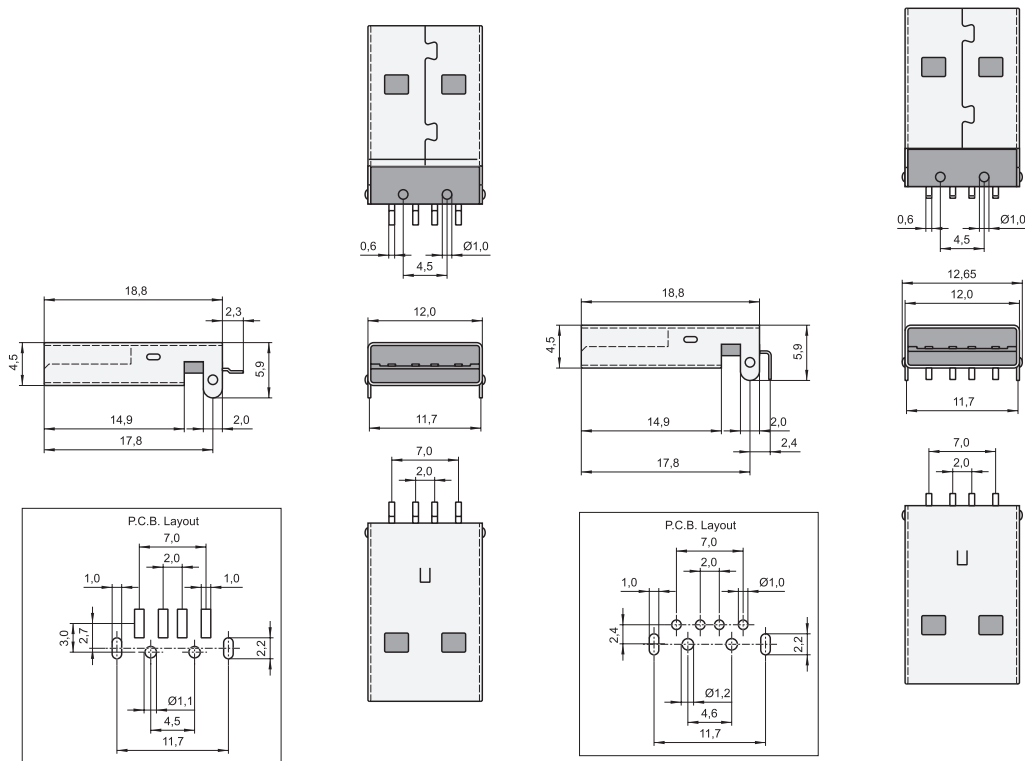

Standard color: black

All dimensions in mm.
Other versions upon request.

USB - A - 0450 X GT - 004 M X

- A: Type A
- 0450: mounting height 4,50mm
- Type: A = right angled dip
P = parallel SMD
- GT: sel. Au
- X: RoHS: U = RoHS-compliant with high temp. plastic
L = RoHS-compliant with standard temp. plastic
- M: Male
- 004: 4 contacts