



Features

- Industry's lowest internal resistance
- Switches at optimum temperature
- Axial leaded, with flexible design options available
- Fully compatible with current industry standards
- Weldable nickel terminals
- 100% lead-free

MF-SVS Series - PTC Resettable Fuses

Electrical Characteristics

Model	V max. Volts	I max. Amps	I _{hold}	I _{trip}	Initial Resistance			1 Hour (R ₁) Post-Trip Resistance	Max. Time To Trip		Tripped Power Dissipation
			Amperes at 23°C		Ohms at 23°C			Ohms at 23°C	Amperes at 23°C	Seconds at 23°C	Watts at 23°C
			Hold	Trip	Min.	Max.	Typ.	Max.			
MF-SVS170	10	100	1.7	4.1	0.018	0.032	0.023	0.064	8.5	5.0	2.1
MF-SVS175	10	100	1.75	4.2	0.017	0.030	0.022	0.060	8.5	5.0	2.1
MF-SVS210	10	100	2.1	5.0	0.010	0.020	0.016	0.040	10.5	5.0	2.4
MF-SVS230	10	100	2.3	5.2	0.010	0.018	0.014	0.036	12.5	5.0	2.6

Environmental Characteristics

Operating/Storage Temperature-40°C to +85°C
 Maximum Device Surface Temperature
 in Tripped State125°C
 Passive Aging.....+60°C, 1000 hours±10% typical resistance change
 Humidity Aging.....+60°C, 85% R.H. 1000 hours.....±10% typical resistance change
 Thermal ShockMIL-STD-202F, Method 107G,±5% typical resistance change
 +85°C to -40°C, 10 times
 VibrationMIL-STD-883C,No change
 Condition A

Test Procedures And Requirements For Model MF-SVS Series

Test	Test Conditions	Accept/Reject Criteria
Visual/Mech.	Verify dimensions and materials.....	Per MF physical description
Resistance	In still air @ 23°C	R _{min} ≤ R ≤ R _{max}
Time to Trip	At specified current, V _{max} , 23°C	T ≤ max. time to trip (seconds)
Hold Current	30 min. at I _{hold}	No trip
Trip Cycle Life	V _{max} , I _{max} , 100 cycles	No arcing or burning
Trip Endurance.....	V _{max} , 48 hours	No arcing or burning

UL File NumberE 174545S
 CSA File NumberCA 110338
 TÜV File NumberR2057213

Thermal Derating Chart - I_{hold} (Amps)

Model	Ambient Operating Temperature			
	0°C	23°C	60°C	80°C
MF-SVS170	3.6	1.7	1.3	0.8
MF-SVS175	3.65	1.75	1.35	0.8
MF-SVS210	4.3	2.1	1.5	0.8
MF-SVS230	4.4	2.3	1.65	0.8

I_{trip} is approximately two times I_{hold}.



**Leading
by design™**

Asia-Pacific:

TEL +886- (0)2 25624117
 FAX +886- (0)2 25624116

Europe:

TEL +41-41 7685555
 FAX +41-41 7685510

North America:

TEL +1-909 781-5500
 FAX +1-909 781-5700
 bourns.com

Applications

■ Any battery pack application that requires protection with the lowest possible resistance:

- Rechargeable battery packs; designed for NiMH and Li-Ion chemical characteristics
- Cellular / cordless phone rechargeable battery packs
- Laptop computer battery packs

MF-SVS Series - PTC Resettable Fuses

BOURNS®

Product Dimensions

Model	A		B		C		D		F	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
MF-SVS170	16.0 (0.630)	18.0 (0.709)	4.9 (0.193)	5.5 (0.216)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	3.9 (0.154)	4.1 (0.161)
MF-SVS170N	22.0 (0.866)	24.0 (0.945)	3.6 (0.142)	3.9 (0.153)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	2.4 (0.094)	2.6 (0.102)
MF-SVS175	16.0 (0.630)	18.0 (0.709)	4.9 (0.193)	5.5 (0.216)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	3.9 (0.154)	4.1 (0.161)
MF-SVS175N	22.0 (0.866)	24.0 (0.945)	3.6 (0.142)	3.9 (0.153)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	2.4 (0.094)	2.6 (0.102)
MF-SVS175NL	26.0 (1.024)	28.0 (1.102)	3.6 (0.142)	3.9 (0.153)	0.6 (0.024)	0.9 (0.035)	6.1 (0.240)	7.8 (0.307)	2.4 (0.094)	2.6 (0.102)
MF-SVS210	20.9 (0.823)	23.1 (0.909)	4.9 (0.193)	5.5 (0.216)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	3.9 (0.154)	4.1 (0.161)
MF-SVS210N	30.0 (1.181)	32.0 (1.260)	3.6 (0.142)	3.9 (0.153)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	2.4 (0.094)	2.6 (0.102)
MF-SVS230	20.9 (0.823)	23.1 (0.909)	4.9 (0.193)	5.5 (0.216)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	3.9 (0.154)	4.1 (0.161)
MF-SVS230N	30.0 (1.181)	32.0 (1.260)	3.6 (0.142)	3.9 (0.153)	0.6 (0.024)	0.9 (0.035)	4.1 (0.161)	5.8 (0.228)	2.4 (0.094)	2.6 (0.102)


Packaging: Bulk - 500 pcs. per bag. Tape and Reel - Consult factory.

Leads: 1/4 Hardened Nickel 0.125mm (.005") nom.


DIMENSIONS = $\frac{\text{MM}}{\text{(INCHES)}}$

NOTE: All "S" style models available with 1 or 2 slots. The dimensions and shape of the leads can be modified to suit the battery pack design.
All models are available without insulation wrapping.


Standard Style

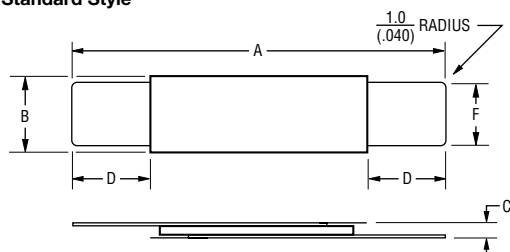

"S" Style

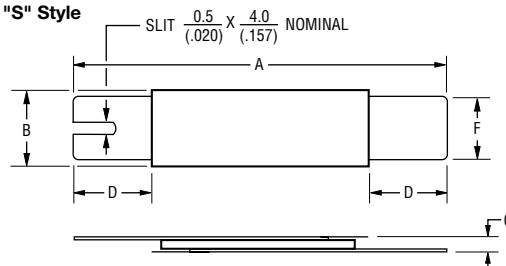


"SS" Style

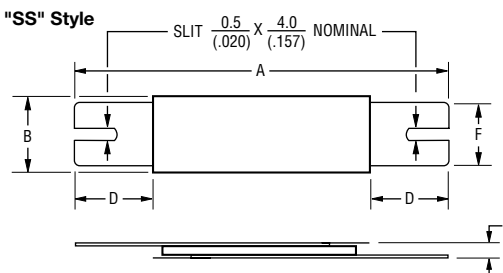

MF-SVS Series - PTC Resettable Fuses

BOURNS®

Typical Time to Trip at 23°C

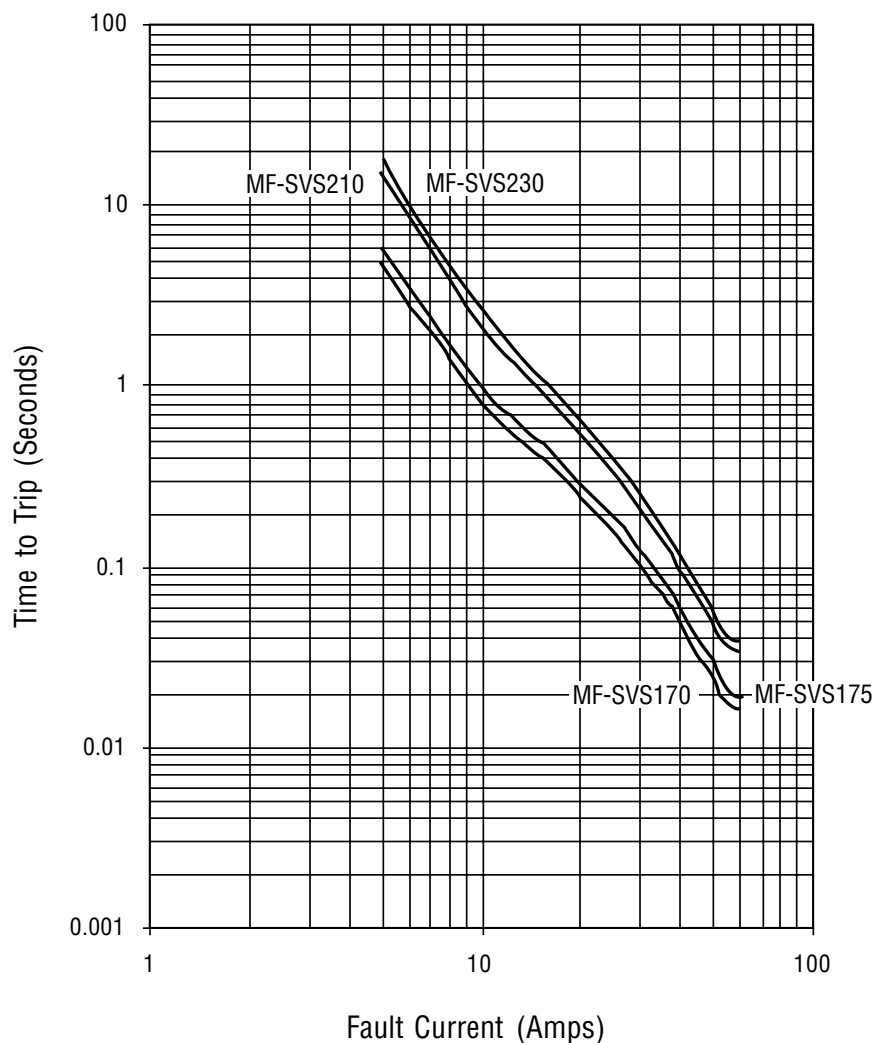

How To Order

MF - SVS 210

Multifuse®
Product Designator

Series
SVS = Axial Leaded "Strap" Component

Hold Current, I_{hold}
170-230 (1.70 - 2.30 Amps)

Narrow Device Option
N = Narrow (3.6mm)

Lead Option
S = Slotted Lead Option (one side)
SS = Slotted Lead Option (two sides)

Longer Lead Option
L = Longer Leads

Insulating Option
U = Non-Insulated Option

Packaging Option
-0 = Bulk Packaging
-2 = Tape and Reel* (Consult factory)

*Packaged per EIA 486-B

Typical Part Marking

Represents total content. Layout may vary.

