

COMBO MIMO MOBILE ROOF SMA ANTENNA




LTE ANTENNA

Frequency Range	698-960/1710-2690 MHz
Polarization	Linear
Main antenna gain	2.5 dBi
Aux antenna gain	2.0 dBi
V.S.W.R	<3.0
Impedance	50 Ω
Connector	SMA Male

MECHANICAL/ENVIRONMENTAL

Mounting Method	Mounting Method: Screw
Radome Ingress Protection rating	IP67
Radome Material	ABS
Weight	<250g
Housing Dimensions	Ø 80x15 mm
Cable	2x RG174, 3000 mm
RoHS Compliant	v

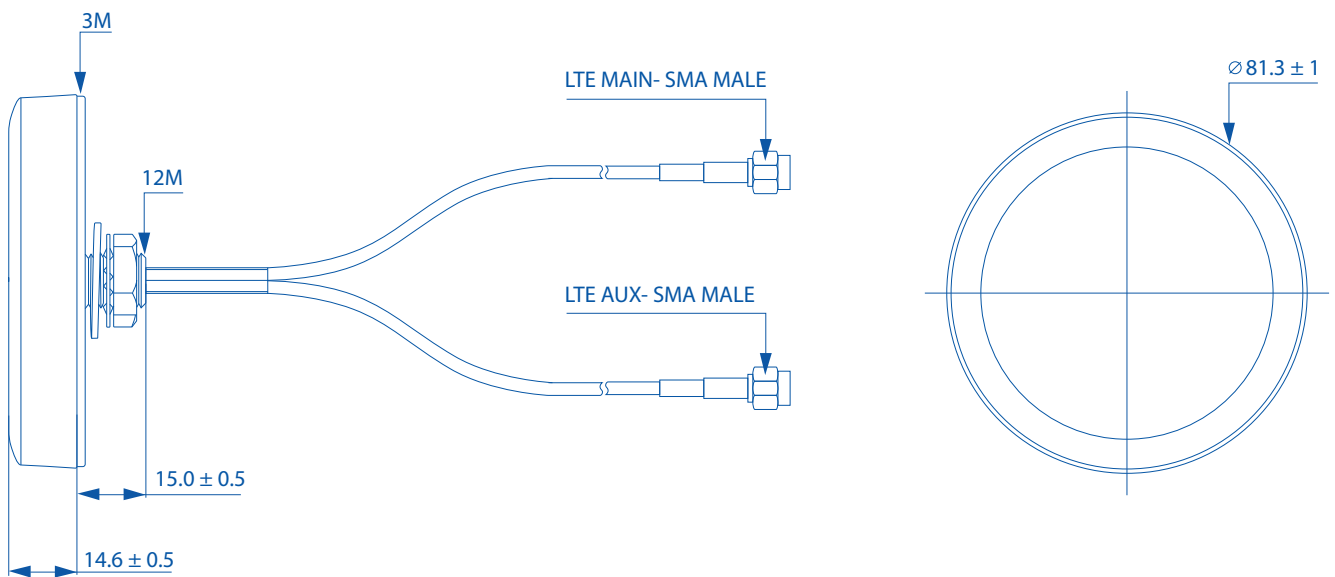

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Teltonika:](#)

[PR1KCL25](#)