

Search

About
Vectron

What's
New!

Vectron
Products

Contact
Vectron

Jobs
@VI

VTB1 Miniature TCXOs


Featuring

- +3.0 or 5.0 Vdc Option
- HCMOS/TTL compatible
- Low Cost
- Voltage Tune Option
- Low Profile Surface Mount
- Reflowable



Frequency Range	1 to 40 MHz
Stability Options	1 = ±1.0 PPM 0°C to +50°C 2 = ±2.5 PPM -30°C to +70°C 3 = ±3.5 PPM -30°C to +70°C 4 = ±5.0 PPM -40°C to +85°C
Stability vs Supply	<±0.3 PPM vs B+ ±5%
Aging (Typical)	<1.0 PPM/year at +40°C dynamic
Input Voltage & Current	A = +5.0 Vdc ±5% <20 mA B = +3.0 Vdc ±5% <20 mA
Output	Logic 1 = 90% of VCC minimum Logic 0 = 10% of VCC maximum
Load	2 HCMOS or 2 TTL minimum
Mechanical Trim	±3.0 PPM Minimum
Trim Options	0 = Mechanical Trim 1 = ±5.0 PPM minimum Voltage Control & Mechanical trimmer
Typical P/N	VTB1-2AO 10.0 MHz 2 = +2.5 PPM A = +5.0 Vdc 0 = Mechanical trim adjust

We welcome your custom requests and will issue a custom part number for items that are not listed.

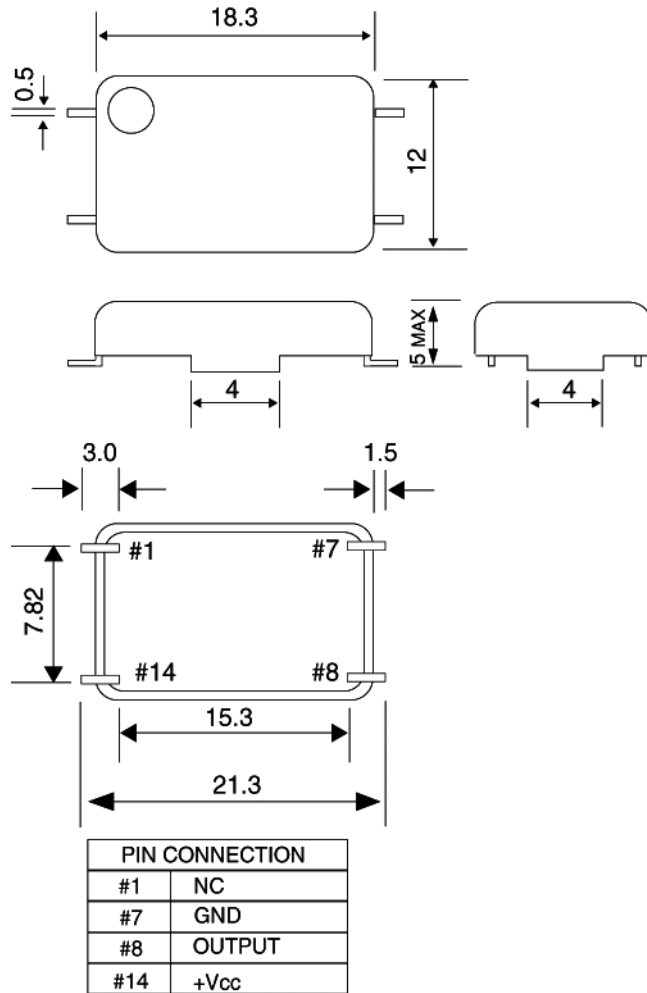

For additional information please contact:

USA: Vectron International 166 Glover Avenue, Norwalk, CT 06856-5160
Tel: 1-88-VECTRON-1 Fax: 1-888-FAX-VECTRON Email: vectron@vectron.com

EUROPE: In Denmark, Finland, Ireland, Italy, Israel, Norway, Spain, UK:
Tel: 44(0) 1703 766 288 Fax: 44(0) 1703 766 822
In Austria, Belgium, France, Germany, Luxembourg, Netherlands, Sweden, Switzerland:
Tel: 49(0) 72 63 648 0 Fax: 49(0) 72 63 619 6

ASIA: In China, Taiwan, Japan:
Tel: 1-603-598-0070 Fax: 1-603-598-0075
In Korea, Singapore, Australia, India:
Tel: 1-203-853-4433 Fax: 1-203-849-1423