
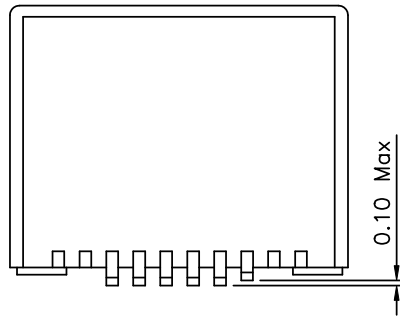
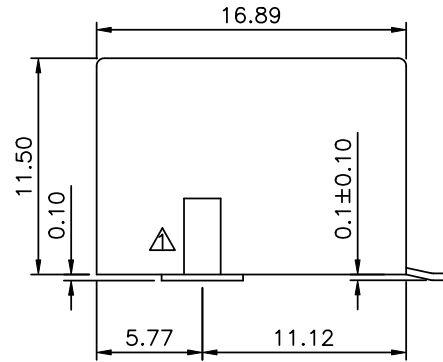




SPECIFICATION

Housing: DSM Stanyl Te250F6 (Nylon-46)
 Heat Deflection Temp 290°C
 Black Color UL94V-0
 Contact: 0.35mm Thick Phosphor Bronze
 Gold Plated 6u"

Hold Down: 0.30mm Thick Copper Alloy Plated With Tin
 Cavity Confirms To Fcc Rules And Regulations
 Part 68 Subpart F
 RoHS Compliant

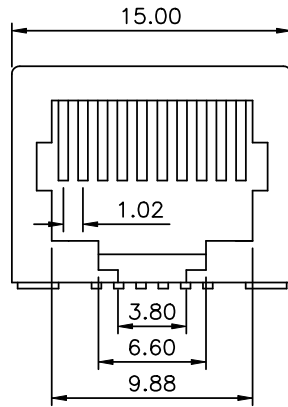

Coplanarity:
 The Maximum Distance
 Between Lowest And
 Highest Pin When
 Housing Rests
 On A Flat Surface

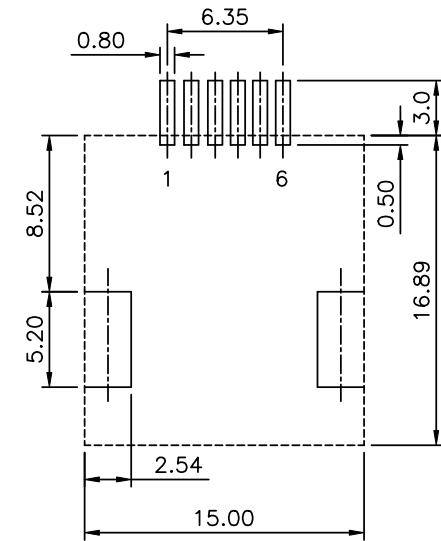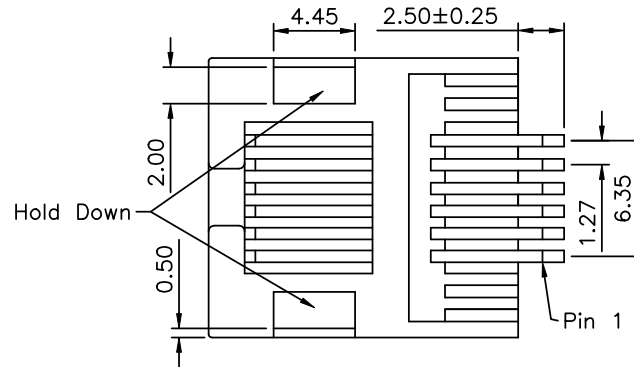

PCB Layout

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.13 .XXX ±0.05 ANG: ±0.30°				
PART No. MJVW0606KX06-H		MEI						
DRAWING No. MJVW0606KX06-H		HZF						
SCALE		REV.		UNIT	NO. REV.	REVISIONS	CHK	DATE
NONE		A1		mm				
					A1	MODIFY DRAWING	HZF	08/11/2008
					A0	NEW RELEASE		