


Tolerances		Revisions	
1-20=+/-0.2		Approved	Date
20-30=+/-0.3		Checked	Date
30-40=+/-0.4		M.H.	Date
40-50=+/-0.5		Drawn	Date
50-100=+/-0.75		T.J.A.	
100-300=+/-1.5			
Angles=+/-1			
Dimensions are in Millimeters		NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19488 6. Per ZZ-R-765 7. Per WW-1-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 3 min. over nickel pl. 50 min. over copper strike	

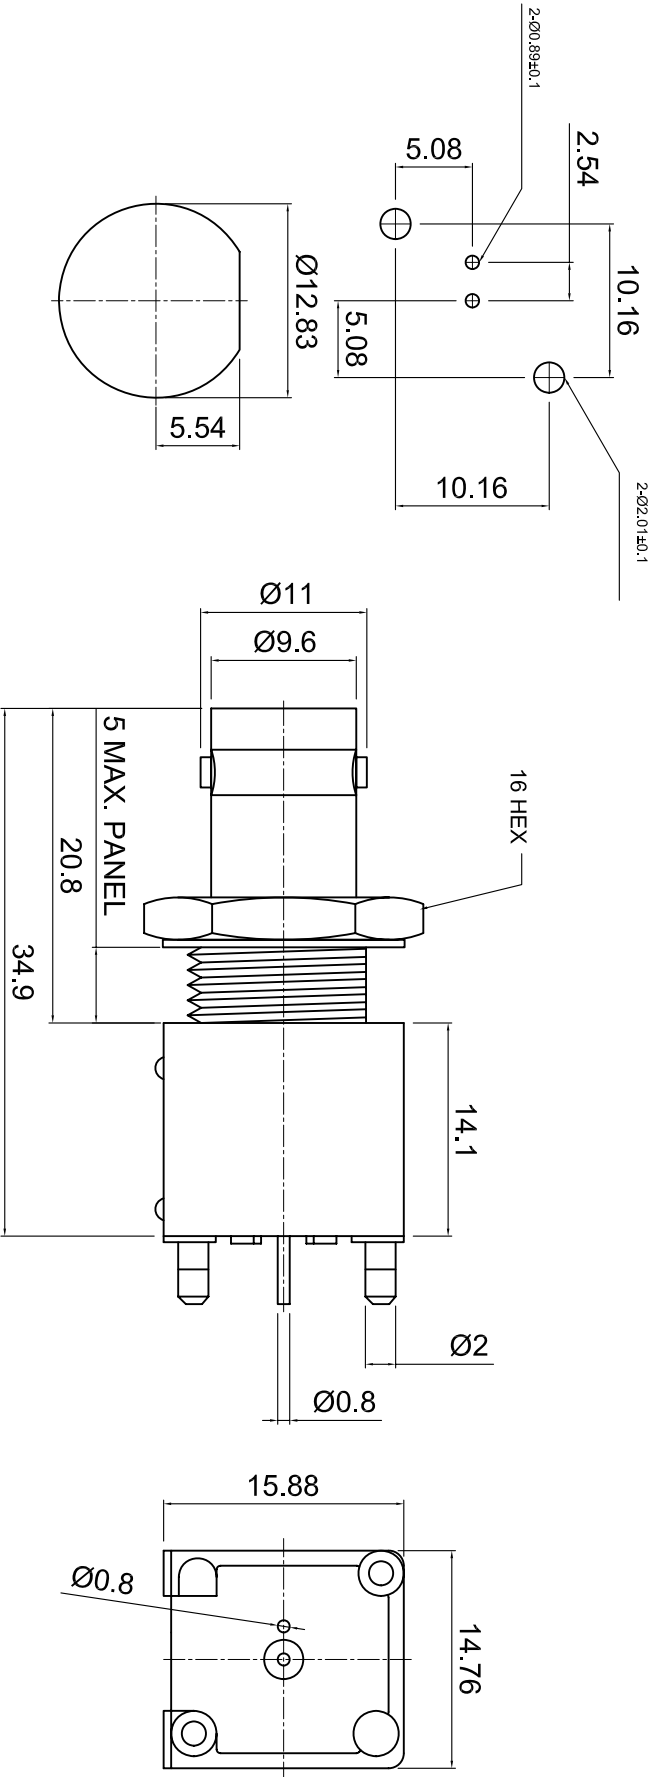

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 4907 Morena Boulevard, #1411 San Diego, California 92117 Part Number: LTI-BSF54HNPM		
Connector Body	Zinc Alloy	Nickel, Note 9			
Center Contact: Female	P. Bronze	Gold, Note 11	Description BNC PCB vertical thru hole jack. Nickel plated zinc alloy casing. Polypropylene dielectric. 50 Ohm part. Scale 2:1		
Insulation	Polypropylene	None			
Ferrule	--	--	Drawing No. BSF54HNPM		
Gasket	--	None			
Hex Nut	Brass, Note 1	Nickel, Note 9	File Name BSF54HNPM		
Lock Washer	Brass	Nickel, Note 9			