
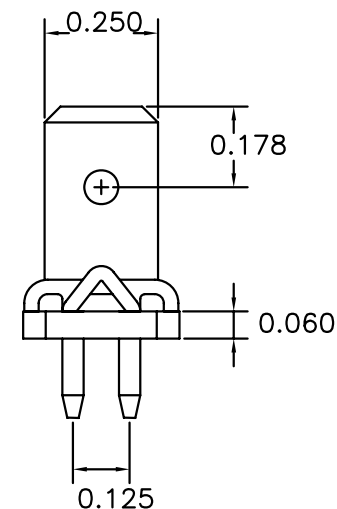
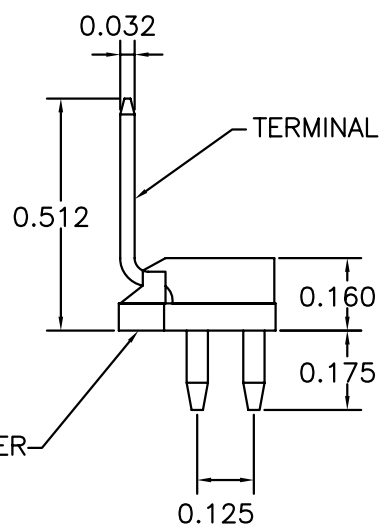


PRODUCT NUMBER NOTE 4	PLATING
221-E	O B S O L E T E
221-ELF	150 μ INCH MIN. 100% MATTE TIN

NOTES:

- SPACER MATERIAL: PPA 45% GLASS REINFORCED, COLOR: BLACK, FLAME RETARDANT PER UL 94V-0.
TERMINAL MATERIAL: C72500
- COMPLIANT PRESS-FIT PINS-FOUR
INSERTION FORCE: 90 lbs TYPICAL (240 MAX)
RETENTION FORCE: 35 lbs TYPICAL (10 lbs MIN) AT TAB
PLATED THROUGH HOLE SIZE: .039 - .044
(.0465 DRILL RECOMMENDED)
FOR USE WITH NEMA STANDARD 1/4" POWER RECEPTACLE
CURRENT RATING: 10 AMPS @10° C TEMPERATURE RISE.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 255°C BOARD PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE OVEN.
- ADD AN "LF" SUFFIX TO PART NUMBER FOR PRODUCT THAT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.



mat'l. code SEE NOTE 1				surface	tolerance	projection	product family
ltr	ecr no	dr	date	tolerances unless otherwise specified		INCH	FASTECH
A	V91019	LSS	1999-04-28	angles	linear .xxx ±.003		
B	V20114	CGD	2002-01-18			scale 1:1	title
C	V06-0365	HTB	2006-06-06				221-E POWER TERMINAL
D	V06-1031	HTB	2006-10-23	dr	R. CONRAD	FCJ	dwg no
E	V06-1196	HTB	2007-01-19	engr	R. CONRAD		sheet 1 of 1
				chr	R. CONRAD		A88KC4039
				appd	R. CONRAD		size
sheet	revision	E					Product Customer Drawing
index	sheet	1					