

BOURNS®

Features

- Compact surface mount packaging
- Contains both transmit and receive transformer in a single package
- Isolation voltage: 1500 Vrms

Applications

- Telecom

PT74344 - T1/CEPT/ISDN-PRI Transformer

Electrical Specifications @ 25 °C

Turns Ratio ±5 %
1:1.15CT & 1CT:2CT
 Primary Inductance (mH min.)
1.20 & 1.20
 Primary Leakage Inductance (µH max.)
0.60 & 0.60
 C_{ww} (pF max.)30 & 30
 Pri DCR (Ω max.)0.70 & 0.70
 Sec DCR (Ω max.)0.70 & 1.00
 Primary Pins16-14, 6-8
 Operating Temperature (°C)0 to +70


*CT : center tap

Packaging Specifications


Tape and Reel*700 pcs./reel

**"E" suffix at end of part number designates tape & reel packaging, e.g. PT74344E.

Product Dimensions

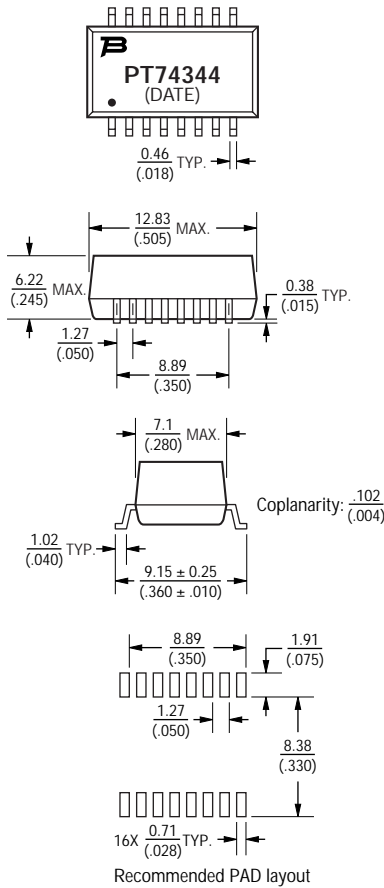

Electrical Schematic



DIMENSIONS ARE: $\frac{\text{MM}}{\text{(INCHES)}}$

TOLERANCE: $\pm \frac{0.25}{(.010)}$

NOTE: DIMENSIONS ARE EXCLUSIVE OF SOLDER



Asia-Pacific: TEL +886-2 25624117
 FAX +886-2 25624116
Europe: TEL +41-41 7685555
 FAX +41-41 7685510
N. America: TEL +1-909 781-5500
 FAX +1-909 781-5700

www.bourns.com