



Residual current circuit-breaker, 16A, 2p, 03A, AC-Char

Part no. FI-16/2/003
Catalog No. 279176
Alternate Catalog No. FI-16-2-003

Similar to illustration

Delivery program

Basic function			Residual current circuit-breakers
Number of poles			2 pole
Rated current	I_n	A	16
Rated short-circuit strength	I_{cn}	kA	10
Rated fault current	$I_{\Delta N}$	A	0.03
Type			Type AC
Tripping		s...	non-delayed
Product range			FI
Sensitivity			AC current sensitive
Impulse withstand current			Partly surge-proof 250 A

Technical data

Electrical

Standards			IEC/EN 61008
Rated operational voltage	U_e	V	
	U_e	V AC	230/400

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting			Top-hat rail IEC/EN 60715
Terminals top and bottom			Twin-purpose terminals
Terminal protection			Protection against electric shock to IEC 536
Thickness of busbar material		mm	0.8 ... 2

Design verification as per IEC/EN 61439


Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	16
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	1.2
Static heat dissipation, non-current-dependent	P_{vs}	W	0
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
			Starting at 40 °C, the max. permissible continuous current decreases by 3% for every 1 °C

Technical data ETIM 6.0

Circuit breakers and fuses (EG000020) / Residual current circuit breaker (RCCB) (EC000003)			
Electric engineering, automation, process control engineering / Electrical installation, device / Residual current protection system / Residual current circuit breaker (RCCB) (ecI@ss8.1-27-14-22-01 [AAB906011])			
Number of poles			2
Nominal rated voltage		V	230
Nominal rated current		A	16
Rated fault current		A	0.03

Mounting method			DIN rail
Leakage current type			AC
Selective protection			No
Short-circuit breaking capacity (Icw)		kA	10
Surge current capacity		kA	0.25
Frequency			50 Hz
Additional equipment possible			Yes
Degree of protection (IP)			IP20
Construction size (in accordance with DIN 43880)			1
Width in number of modular spacings			2
Built-in depth		mm	69.5
Short-time delayed tripping			No

Dimensions

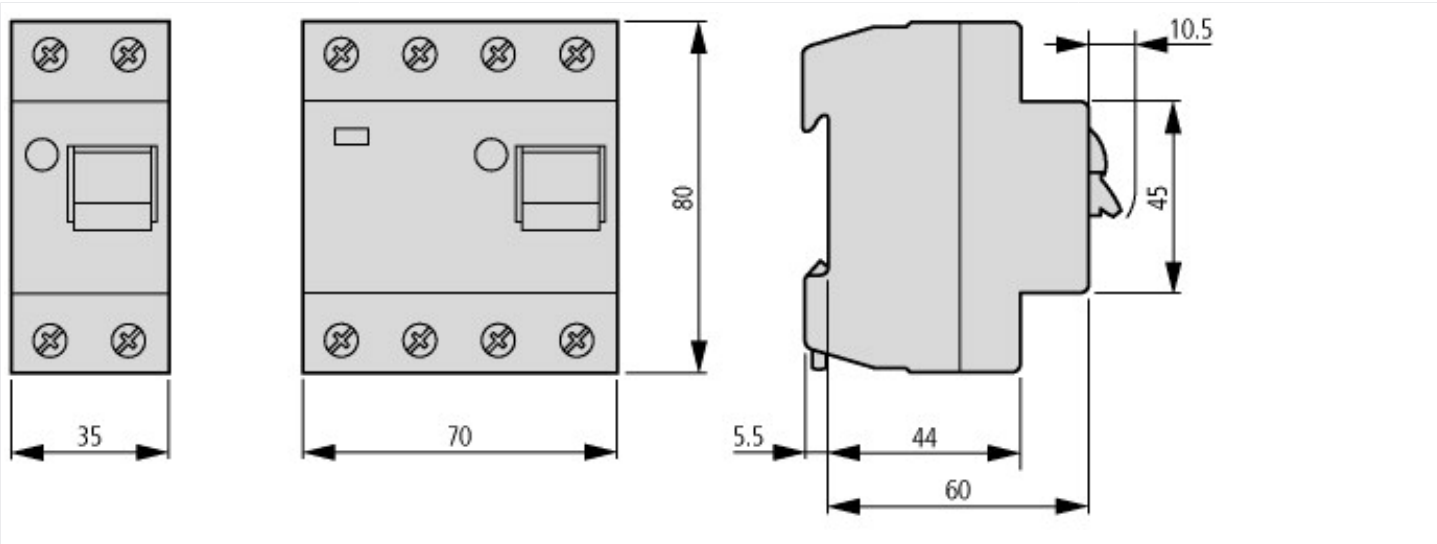

Additional product information (links)

AWA1290-1756 Residual-current-circuit-breaker		
AWA1290-1756 Residual-current-circuit-breaker	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/17560403.pdf	