

# UNIGATE<sup>®</sup> IC

Ready-to-install embedded solution


32 DIL

Designed & manufactured in Germany

Norm compliant

Certified

Programmable

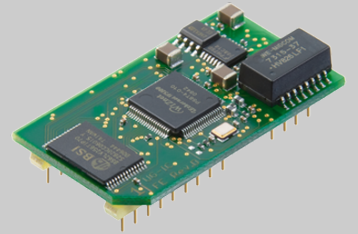

## Data sheet

Complete Fast Ethernet interface

---

10/100 Mbit/s

---

Isolated Fast Ethernet interface

---

IT functions: Web server, FTP server

---

Up to 1540 Bytes input- and 1540 Bytes output data

---

UART up to 625 kBaud

---

## Technische Daten

Dimensions (WxDxH in mm)	45 x 25 x 8 45 x 25 x 11 (without transformer)
Voltage supply	5V; 3,3V
Housing	32 DIL
Weight	ca. 10 g
Current consumption	Typ. 250mA
Operating temperature	Industrial temperature range -40°C up to +85°C
Storage-/Transport temperature	-40°C ... +100°C
Ethernet Protocols	TCP, UDP, IP, web server, FTP, ...
Interfaces	2x UART, 1x SPI, 1x Syn. serial
Technology	W5100

## Comparison Chart - UNIGATE IC-Fast Ethernet variants

Performance Characteristics	UNIGATE IC-FE	UNIGATE IC-FEX
Server-Side-Include (SSI)	No	Yes
RAM-Disk	No	Yes
RAW-Mode	No	Yes

## Order data

Order designation	Description	Order number
UNIGATE IC-FE FEX, 5V	All-In-One Single-Chip Interface für Fast Ethernet FEX, Version 5V	V3722
UNIGATE IC-FE FEX, 3,3V	All-In-One Single-Chip Interface für Fast Ethernet FEX, Version 3,3V	V3766
UNIGATE IC-FE FEX, 3,3V without transformer	All-In-One Single-Chip Interface for Fast Ethernet, Version 3,3V without transformer	V4058
UNIGATE IC-FE, 5V	All-In-One Single-Chip Interface for Fast Ethernet, Version 5V	V3419
UNIGATE IC-FE, 3,3V	All-In-One Single-Chip Interface for Fast Ethernet, Version 3,3V	V3691
UNIGATE IC-FE, 5V without transformer	All-In-One Single-Chip Interface for Fast Ethernet, Version 5V without transformer	V3709
UNIGATE IC-FE, 3,3V without transformer	All-In-One Single-Chip Interface for Fast Ethernet, Version 3,3V without transformer	V3963