



N Connector - Straight Cable Bulkhead Jack

134-0303-406
134-0304-406

134-0307-406
134-0308-406

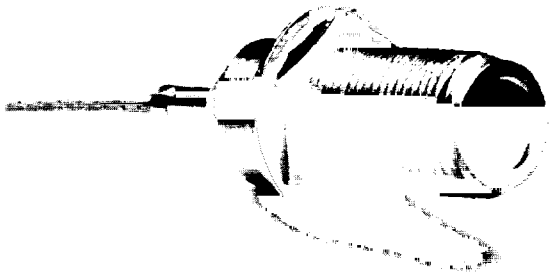

Solder-Crimp Type

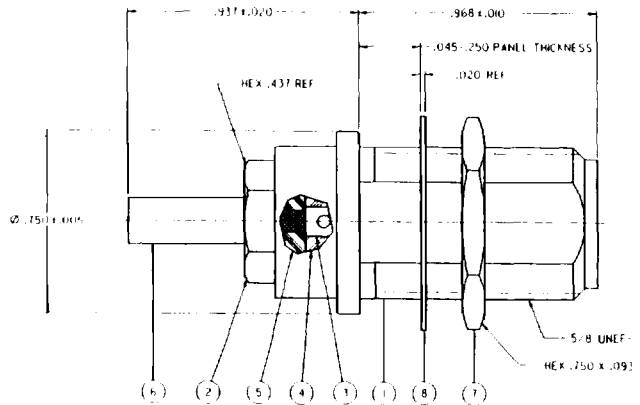

- Mid-Power Performance
- Strong Mechanical Connection
- Antenna Broadcast Applications

Mating engagement for "N" series per MIL-STD-348

Part Number	Item 1 Body	Item 2 Rear Body	Item 3 Contact	Item 4 Insulator	Item 5 Insulator	Item 6 Crimp Sleeve	Item 7 Nut	Item 8 Lockwasher
134-0303-406	Zinc	Brass	Beryllium Copper	Teflon	Teflon	Copper	Brass	Steel
134-0304-406	Nickel pl. .00015 min over	Nickel pl. .0001 min over	Gold pl. .00001 min over			Nickel pl. .0001 min over	Nickel pl. .0001 min	Zinc pl
134-0307-406	Copper pl. .0005 min	Copper pl. .00005 min	Nickel pl. .00005 min			Copper pl. .00005 min		
134-0308-406								


Specifications:

Impedance: 50 Ohms
Frequency Range: 0-11 GHz
Working Voltage: 1000 VRMS
Dielectric Withstanding Voltage: 2500 VRMS


Mechanical:

Cable Acceptability:

134-0303-406 RG 316/U, RG188/U, RG 161/U, RG 174/U, RG 179/U
134-0304-406 Double Shielded RG 316, Double Shielded RG 188
134-0307-406 RG 58/U, RG 141, RG 303/U
134-0308-406 RG 142/U, RG 223/U, RG 400/U, RG 55/U



Cable Strip Dimensions

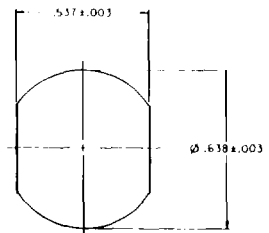

Recommended Mounting Hole

*Made in
America*