

3005 Refrigerator Door Switches *Splashproof*



3005 25W 25T85 5E4 (50,000 Operations) 250Vac
3006 65W 25T85 5E4 (50,000 Operations) 250Vac




RoHS compliant

These products require 3mm minimum actuator stroke to ensure switch action and rating above.

μ contact gap.
 Technical data on pages 4 & 5.

- ▶ Door switches
- ▶ Momentary on and momentary off switching
- ▶ Splashproof
- ▶ Choice of terminal orientation
- ▶ Choice of actuators

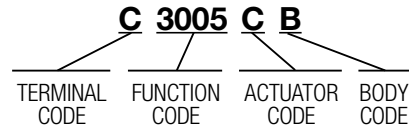

ORDER FORMAT

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS
<p>C</p> <p>6.3 x 0.8</p>	<p>3005</p> <p>ON - OFF (momentary OFF) 1mm max travel to OFF position</p>	<p>B</p>	<p>3005 or 3006</p>	<p>Finish Gloss finish only</p> <p>Color White is standard</p> <p>Call factory for custom colors A full range is available for large orders</p>
<p>H</p> <p>4.8 x 0.8</p>	<p>3006</p> <p>ON - OFF (momentary ON) 3mm min travel to ON position</p>	<p>C</p>	<p>3005 only</p>	

Dimensions (mm) (C terminals shown)

