




## TYPE NQ-F

### FEMALE FINGRIP™

#### NYLON INSULATED QUICK DISCONNECT TERMINAL

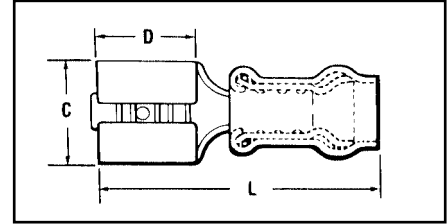

B-38


Smooth copper funnel wire entry greatly reduces the possibility of wire stubbing and provides maximum wire support.

CATALOG NUMBER	WIRE RANGE	NEMA TAB SIZE	MAX. INSUL. DIA.	DIMENSIONS			HAND TOOL
				C	D	L	
NQ18F187D	22-18 STRIP LENGTH: 9/32" SLEEVE COLOR: RED	.187 X .020	.118	.233	.250	.85	Y10D
NQ18F250D		.250 X .032	.118	.300	.300	.90	
NQ14F187D	16-14 STRIP LENGTH: 9/32" SLEEVE COLOR: BLUE	.187 X .020	.140	.233	.250	.86	Y10D
NQ14F250D		.250 X .032	.140	.300	.300	.91	
NQ10F250D	12-10 STRIP LENGTH: 3/8" SLEEVE COLOR: YELLOW	.250 X .032	.239	.300	.300	1.06	Y10D

## TYPE NQ-M

### MALE FINGRIP™

#### NYLON INSULATED QUICK DISCONNECT TERMINAL

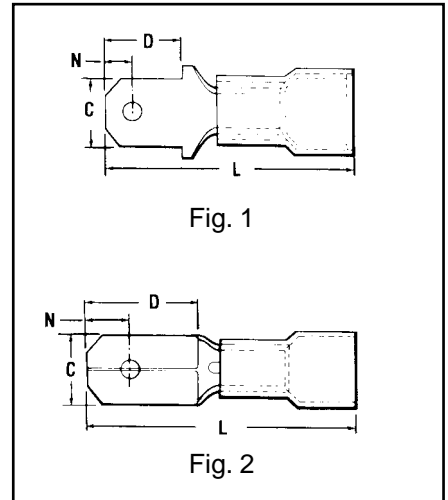

Smooth copper funnel wire entry greatly reduces the possibility of wire stubbing and provides maximum wire support.

CATALOG NUMBER	WIRE RANGE	NEMA TAB SIZE	MAX. INSUL. DIA.	FIG. NO.	DIMENSIONS				HAND TOOL
					C	D MIN.	N	L	
NQ18M187D	22-18 STRIP LENGTH: 9/32" SLEEVE COLOR: RED	.187 X .020	.118	1	.187	.250	.125	.82	Y10D
NQ18M250D		.250 X .032	.146	1	.250	.312	.162	.93	
NQ14M187D	16-14 STRIP LENGTH: 9/32" SLEEVE COLOR: BLUE	.187 X .020	.146	1	.187	.250	.125	.80	Y10D
NQ14M250D		.250 X .032	.170	1	.250	.312	.162	.93	
NQ10M250D	12-10 STRIP LENGTH: 3/8" SLEEVE COLOR: YELLOW	.250 X .032	.239	2	.250	.352	.178	1.14	Y10D