


2-417549-0 Product Details

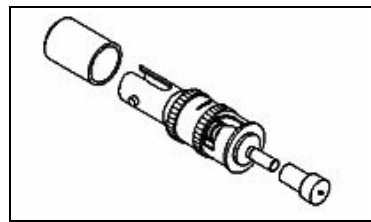

2-417549-0

Fiber Optic Attenuators

Not EU RoHS or ELV Compliant (Find RoHS Compliant Alternates)

Product Highlights:

- Attenuator - Fiber Optic
- Fiber Optic Attenuator Type = Dual Window
- Attenuation = 20.0 dB
- Attenuator Style = Build Out
- Operating Wavelength = 1310 nm, 1550 nm

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 2-417549-0

Superseded

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

[Contact Product Information Center](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • Singlemode Fixed Buildout Attenuators (PDF, English) <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • Installation and Cleaning Procedure for Fiber Optic ... (PDF, English) <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	---

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Attenuator - Fiber Optic • Fiber Optic Attenuator Type = Dual Window • Type of Connector = ST • Sealed = Yes <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Attenuation (dB) = 20.0 • Operating Wavelength (nm) = 1310, 1550 • Attenuation Value = Fixed <p>Body Features:</p> <ul style="list-style-type: none"> • Attenuator Style = Build Out • Reflectance (less than or equal) (dB) = -55 	<p>Configuration Features:</p> <ul style="list-style-type: none"> • Mode = Singlemode <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = Not ELV/RoHS compliant • Lead Free Solder Processes = Not relevant for lead free process <p>Packaging Features:</p> <ul style="list-style-type: none"> • Fiber Packaging Style = None <p>Other:</p> <ul style="list-style-type: none"> • Brand = AMP • Comment = Designed to comply with Telcordia GR-910
---	---

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed



Feedback

