

# OH Type Crystal Oscillator

RoHS Compliant Optional

## FEATURE

1. TYPICAL 12.8X12.8X5.0mm standard package.
2. Compatible with 8-pin dual in line.
3. HCMOS circuit TTL/CMOS compatible.
4. Hermetically sealed metal case and high reliability.
5. Case ground for minimizing RF radiation.
6. Tight symmetry (45 to 55%) available.
7. Tri-state output option available.
8. Packing: 40 pcs / Tube.



## ORDERING INFORMATION

O	H	T	T	D	C	J			A	N	L	-	?
XO	Package (mm)	Supply Voltage(V) & pin Form	Tri-State Function	Freq. Stability (PPM)	Temp. Range (°C)	Output Logic and Symmetry			Oscillator Mode	Appearance	Marking	Dash	Freq. (MHz)
	12.8x12.8	T: 5, Through Hole G: 5, Gull Wing E: 2.8~3.3 Through Hole F: 2.8~3.3 Gull Wing J: 2.5 K: 1.8	J: Fix-Freq Without Tri-State K: Fixed-Freq With Tri-State	D: ±25 G: ±50 H: ±100	C: -20~+70 D: -30~+80 L: -40~+85	TTL	50±5%	50±10%	A: AT Fundamental T: AT3 <sup>rd</sup> Overtone	N: Normal	L: Laser Marking F: Laser Marking (RoHS compliant standard)		xx.xxxxx
						TTL 50pF	A	B					
						CMOS 15pF	E	R					
						CMOS 50pF	J	K					
							F	G					

Ordering example: OHTTDCJANL-14.318180 MHz

VCC: 5V Through Hole, Fixed-Frequency with Tri-State, Frequency Stability: ±25ppm, -20°C to +70°C. Load: CMOS 15pF, Symmetry: 50±5%. AT fundamental, Laser Marking, Freq. 14.31818MHz

## ELECTRICAL SPECIFICATION

Parameter	5V±10%	3.3V±10%
Frequency Range (MHz)	1 ~ 110	1 ~ 156
Operating Temp. Range (°C)	Refer to Ordering Information	
Frequency Stability *	Refer to Ordering Information	
Supply Current		
1.0MHz ≤ Fo < 20MHz	15	10
20MHz ≤ Fo < 50MHz	40	30
50MHz ≤ Fo < 70MHz	50	40
Transition Time + : Rise/Fall Time (ns) max.		
1.0MHz ≤ Fo < 20MHz	8	10
20MHz ≤ Fo < 50MHz	5	6
50MHz ≤ Fo < 156MHz	4	5
Storage Temp. Range (°C)	-55 ~ +125	

## FREQ. STABILITY vs. TEMP. RANGE

Temp.(°C)	PPM	D:±25 G:±50 H:±100		
		D:±25	G:±50	H:±100
C -20~ +70	○	○	○	
D -30~ +80	○	○	○	
L -40~ +85	○	○	○	


○: Standard

←

\* Inclusive of calibration at 25°C, operating temperature range, input voltage variation, load variation, aging, shock, and vibration.

+ Transition times are measured between 10% and 90% of VDD, with a output load of 15pF.

## OUTLINE DRAWING

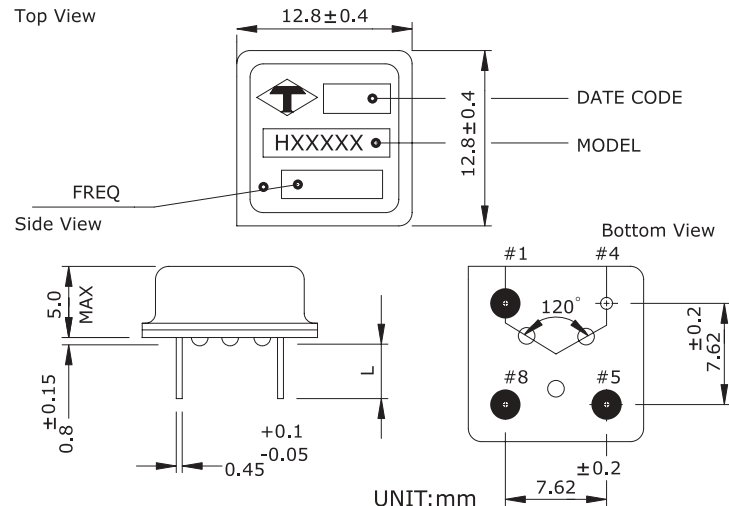

PIN	MODEL	HXFXXX	HXTXXX
#1		NC	3-State
#4		CASE GND	
#5		Output	
#8		VDD	