




STLZ960/..-7.62-V-GREEN

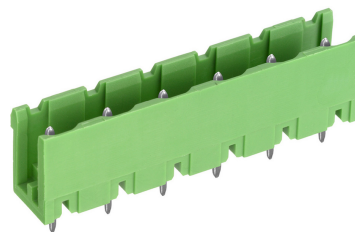

Technical Data

Wire Sizes		Insulating Material	
Solid min	-	Material	PA 6.6
solid max	-	Flammability Class	UL 94 V-0
Temperatures			
Stranded (flexible)	-	Operating Temperature	-30 °C - 105 °C
Wave Soldering Process			
Stranded (flexible)	-	Soldering Temperature, recommended	265 °C
Stranded with Ferrule	-	Peak Soldering Time, recommended	3-4 s
min		Reflow Process	
Stranded with Ferrule	-	Soldering Temperature, recommended	-
max		Peak Soldering Time, recommended	-
Dimensions			
Stripped Length			
PCB Hole Diameter	1.4 mm		
Materials			
Contact Pin	Copper Alloy		


Colours

GREEN	RAL6018	
LIGHT GREEN	similar RAL 6018	

Colours according to RAL, there may be variations on colour due to production conditions.
Special colours on request.

Counterparts (Spacing 7.62 mm)


Pin Strip/Terminal Blocks	
AKZ960	

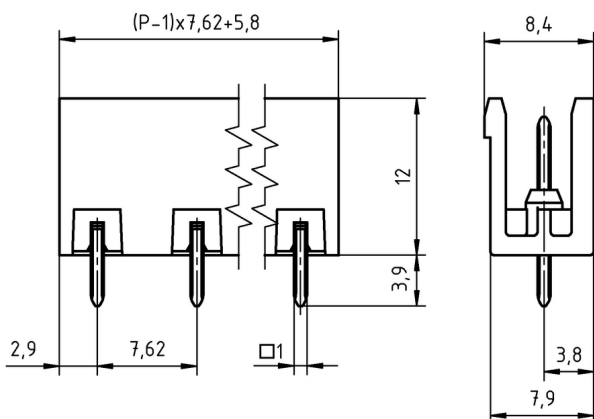

Order Data (Spacing mm)

Poles	Width (mm)	Article Designation	Article Number	PU
2	13.42	STLZ960/2-7.62-V-GREEN	50960025131E	100
3	21.04	STLZ960/3-7.62-V-GREEN	50960035131E	100
4	28.66	STLZ960/4-7.62-V-GREEN	50960045131E	100
5	36.28	STLZ960/5-7.62-V-GREEN	50960055131E	100
6	43.90	STLZ960/6-7.62-V-GREEN	50960065131D	50
7	51.52	STLZ960/7-7.62-V-GREEN	50960075131D	50
8	59.14	STLZ960/8-7.62-V-GREEN	50960085131D	50
9	66.76	STLZ960/9-7.62-V-GREEN	50960095131D	50
10	74.38	STLZ960/10-7.62-V-GREEN	50960105131D	50
11	82.00	STLZ960/11-7.62-V-GREEN	50960115131D	50
12	89.62	STLZ960/12-7.62-V-GREEN	50960125131D	50
13	97.24	STLZ960/13-7.62-V-GREEN	50960135131D	50
14	104.86	STLZ960/14-7.62-V-GREEN	50960145131D	50
15	112.48	STLZ960/15-7.62-V-GREEN	50960155131D	50
16	120.10	STLZ960/16-7.62-V-GREEN	50960165131D	50

Accessories

Figure	Designation	Article Number
	Coding star CS2-5.0/5.08-RED	50000000024



Dividing element SE-STL950-GREEN	50950000002
----------------------------------	-------------

Ratings



Usegroup	B	C	D	
Rated Voltage	300 V	150 V	300 V	400 V
Rated Current	15 A	15 A	10 A	12 A
Overtoltage Category				III
Test Voltage	1.6 kV	1.6 kV	1.6 kV	6.0 kV
Pollution Degree				3