

RED INDICATES ORIGINAL

DASH NO	MODEL NO	IMPEDANCE OHMS
-1	AD122	50
-2	UAD122	75

INCH	MM
.005	0.13
.030	0.76
.115	2.92
.187	4.75
.436	11.07
.440	11.18
.468	11.89
.475	12.06
.480	12.19
.500	12.70
.562	14.27
.687	17.45
1.377	34.98

DWG
SIZE
B


DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR PROCUREMENT OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION.

REVISIONS


REV	ECO	DESCRIPTION	DWN	APPROVED	DATE
E	10274	REVISED AND REDRAWN; SEE ECO	DKC	Bm; Fd	8/9/93

1-0423

SH 1

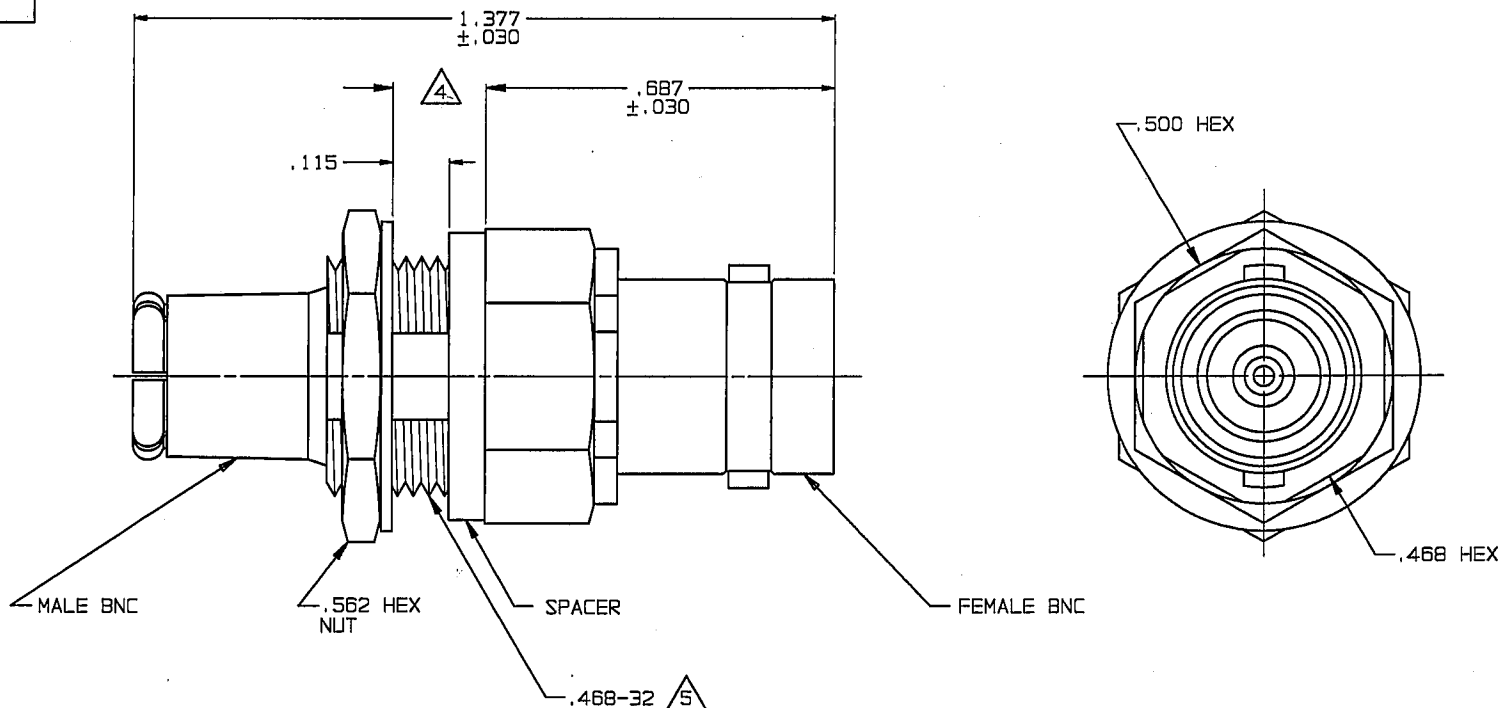

- 5 COMMERCIAL THD, NOT PER H28
- 4 MAX PANEL THICKNESS .187 (REMOVE SPACER)
3. WITHIN SERIES BNC COAXIAL ADAPTER MALE
PUSH ON PLUG TO FEMALE BULKHEAD
JACK, BOTH 50 & 75 OHM VERSIONS
2. FINISH: TFS-1A (NICKEL)
1. ALL DIM ARE IN INCHES



RECOMMENDED
PANEL CUTOUT
SCALE: 2/1

NEXT ASSY

QTY	DESCRIPTION		PART NUMBER		ITEM
TOL UNLESS SPECIFIED	TROMPETER ELECTRONICS, INC.		AD122/UAD122		
.XX ±					
.XXX ± .005					
.XXXX ±					
ANGLES ±					
DWN	DKC	6-21-93	MATERIAL	CODE IDENT	DRAWING NO.
CHK	Bm	8-5-93		14949	1-0423
ENGR	Fd	8/9/93	SCALE 4/1	DATE 1-28-76	SHEET 1 OF 2
APPR					