

EMR18 SERIES LINE SENSE REED RELAY

NEW


EMR18 SERIES

Contact Form	1A	Timing	
Contact Rating		(at nominal IDC, 25Hz drive, 50% duty cycle with diode suppression)	
Maximum switching power	10 VA	Operate time, maximum(Including Bounce)	1.0ms
Maximum switching voltage	100 VDC	Release time, maximum	0.5ms
Maximum switching current	0.5A	Dielectric Voltage	
Maximum carry current	1.0A	Coil to contact	3000 VAC
Contact Resistance, Initial	150 mΩ	Across contacts	150 VDC
Contact Material	Rhodium	Shock Resistance	30G Min.
Life Expectancy (Contact) (signal level load ref 10 VDC, 10mA)	10x10 ⁶	Electrical Life at Rated Load	10 ⁶
Insulation Resistance (Ω)	100x10 ⁶	Temperature Range	-10°C to +60°C

FEATURES

1. Low coil resistance.
2. Less than 15 mA Pull-in current possible.
3. Coil-contact isolation voltage up to 4250VDC/3000VAC.
4. Position of pin is optional.
5. Wide operation current and low power consumption.
6. A sealed metal outer case is used to prevent interference by magnetic field and also to protect the coil during PCB assembly.
7. This product of line sense reed relay are designed for use as telephone line busy detectors.


PART NUMBERING SYSTEM

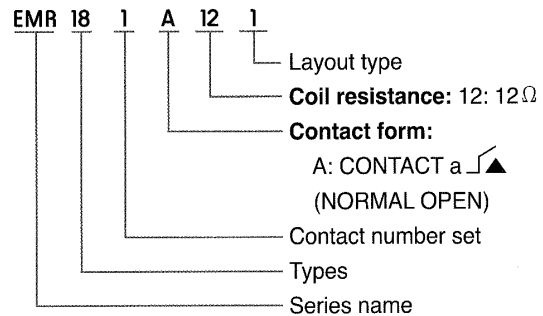


DIMENSIONS

UNIT:mm

EMR18 (FORM 1A)
Magnetic Shield Type

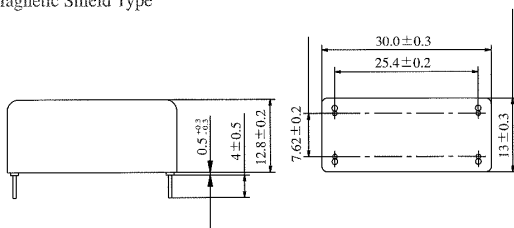

Wiring Diagram and PCB Layout (Top View)

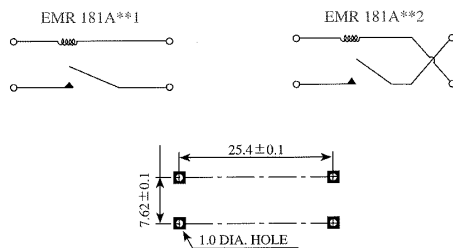

Part Number	Coil Resistance (Ohms+/-10%)	Nominal Input Power (mW)	Nominal Current (mA)	Must Operate Current (mA)	Must Release Current (mA)	Maximum Current (mA)
EMR181A071/2	7	2.8	20	15	5	200
EMR181A091/2	9	3.6	20	15	5	200
EMR181A121/2	12	4.8	20	15	5	200
EMR181A151/2	15	6.0	20	15	5	200
EMR181A181/2	18	7.2	20	15	5	200

Contacts:

TELCONA AG,Head Office: Höri, Switzerland
 TELCONA AG,Sales Office: Sinsheim, Germany
 TELCONA AG,Sales Office: Lésigny, France

Tel.++41-44-860 2550 Fax.++41-44-860 2822
 Tel.++49-7261-655 388 Fax.++49-7261-655 389
 Tel.++33-1-60 34 28 28 Fax ++33-1-60 34 28 29

info@telcona.com
 info@telcona.de
 info@telcona.fr

EMR SERIES CONVENTIONAL TYPE REED RELAY


SERIES	TYPES	CONTACT FORM	CONTACT MATERIAL	MAXIMUM SWITCHING				NOMINAL INPUT POWER(mW) REFERENCE 5V VERSION	OPERATE TIME(ms TYPICAL)	LIFE AT SIGNAL(10VDC/10mA) LEVEL LOADS (NO. OPERATIONS)	BREAKDOWN COIL TO CONTACT(VAC)	BREAKDOWN ACROSS CONTACTS(VDC)	ELECTRICAL LIFE AT RATED LOAD	PACKAGE TYPE	CAN BE FOUND IN THIS SECTION OF BROCHURE	PAGE
				POWER(VA)	VOLTAGE(VDC)	CURRENT(A)	MAX. CARRY CURRENT(A)									
EMR	01	1A,1B	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	500	200	10x10 ⁶	OPEN	PITCH 20.32+2.54mm	12
	02	1A,1B	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	500	200	10x10 ⁶	METAL	PITCH 20.32+2.54mm	12
	03	1A,1B	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	500	200	10x10 ⁶	PLASTIC	PITCH 20.32+2.54mm	12
	07	2A,2B	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	500	200	10x10 ⁶	PLASTIC	PITCH 22.86mm	15
	09	1C	RHODIUM	3	30	0.2	0.5	50	1.0	10x10 ⁶	500	200	10x10 ⁶	PLASTIC	PITCH 22.86mm	13
	10	1C	RHODIUM	3	30	0.2	0.5	50	1.0	10x10 ⁶	500	200	10x10 ⁶	METAL	PITCH 19.42+0.9mm	13
	11	1C	RHODIUM	3	30	0.2	0.5	50	1.0	10x10 ⁶	500	200	10x10 ⁶	PLASTIC	PITCH 19.42+0.9mm	13
	12	1A,1B	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	500	200	10x10 ⁶	METAL	SIP TYPE PITCH 5.08+10.16+5.08mm	14
	13	1A,1B	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	500	200	10x10 ⁶	PLASTIC	SIP TYPE PITCH 5.08+10.16+5.08mm	14
	15	1A	RHODIUM	1	24	0.1	0.3	50	1.0	10x10 ⁶	500	150	10x10 ⁶	PLASTIC	PITCH 12.7mm	15
	16	1A	RHODIUM	10	100	0.5	1.0	50	1.0	10x10 ⁶	1500	200	10x10 ⁶	METAL	SIP TYPE PITCH 5.08+10.16+5.08mm	14
	17	1A	RHODIUM	25	200	1.5	2.5	50	1.0	10x10 ⁶	3750	350	10x10 ⁶	PLASTIC	SIP TYPE PITCH 10.16+10.16+10.16mm	15
	18	1A	RHODIUM	10	100	0.5	1.0	NOT APPLICABLE	1.0	10x10 ⁶	3000	150	10x10 ⁶	METAL	PITCH 25.4mm	10
	19															
	20															

FEATURES

1. 2.54 mm IC terminal arrangement.
2. High switching speed and low bounce time.
3. Use gas tube sealed switch to prevent dust, gas and humidity influence.
4. Wide operate voltage range and low power consumption.
5. Ideal for use on cordless telephone, multifunction telephone, modem, burglar alarm etc..

PART NUMBERING SYSTEM

EMR 01 1 A 08

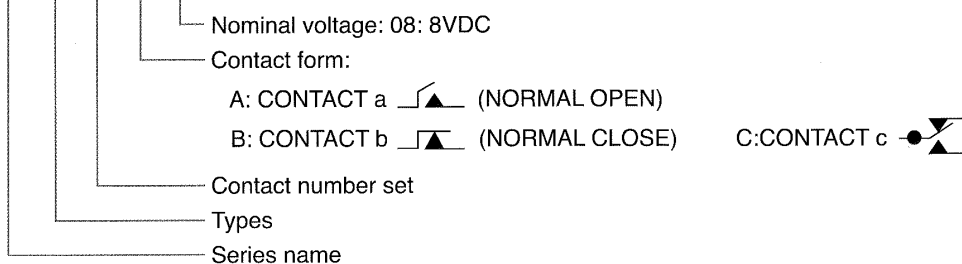

Contacts:

TELCONA AG, Head Office: Höri, Switzerland
 TELCONA AG, Sales Office: Sinsheim, Germany
 TELCONA AG, Sales Office: Lésigny, France


Tel. ++41-44-860 2550 Fax. ++41-44-860 2822
 Tel. ++49-7261-655 388 Fax. ++49-7261-655 389
 Tel. ++33-1-60 34 28 28 Fax ++33-1-60 34 28 29

info@telcona.com
 info@telcona.de
 info@telcona.fr


Types	01	02	03
Contact Form	1A,1B	1A,1B	1A,1B
Contact Rating			
Maximum switching power	10 VA	10 VA	10 VA
Maximum switching voltage	100 VDC	100 VDC	100 VDC
Maximum switching current	0.5A	0.5A	0.5A
Maximum carry current	1.0A	1.0A	1.0A
Contact Resistance, Initial	150 mΩ	150 mΩ	150 mΩ
Contact Material	Rhodium	Rhodium	Rhodium
Life Expectancy signal level load (ref 10 VDC, 10mA)	10x10 ⁶	10x10 ⁶	10x10 ⁶
Timing (at nominal VDC, 25Hz drive, 50% duty cycle with diode suppression)			
Operate time, maximum (Including Bounce)	1.0 ms	1.0 ms	1.0 ms
Release time, maximum	0.5 ms	0.5 ms	0.5 ms
Dielectric Voltage			
Coil to contact	500 VAC	500 VAC	500 VAC
Across contacts	200 VDC	200 VDC	200 VDC
Insulation Resistance (Ω)	100x10 ⁶	100x10 ⁶	100x10 ⁶
Temperature Range	-10°C to +60°C	-10°C to +60°C	-10°C to +60°C
Shock Resistance	30G Min.	30G Min.	30G Min.
Electrical Life at Rated Load	10 ⁶	10 ⁶	10 ⁶

DIMENSIONS


UNIT:mm

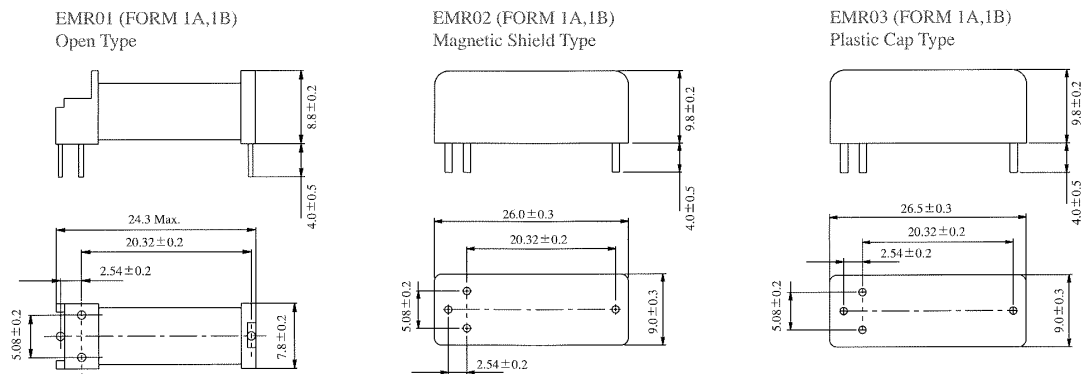

Wiring Diagram and PCB Layout (Top View)
(Form 1A)

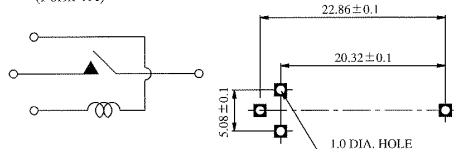

(Form 1B)

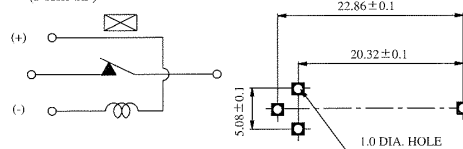

Contacts:

TELCONA AG,Head Office: Höri, Switzerland
 TELCONA AG,Sales Office: Sinsheim, Germany
 TELCONA AG,Sales Office: Lésigny, France


Tel.++41-44-860 2550 Fax.++41-44-860 2822
 Tel.++49-7261-655 388 Fax.++49-7261-655 389
 Tel.++33-1-60 34 28 28 Fax ++33-1-60 34 28 29

info@telcona.com
 info@telcona.de
 info@telcona.fr

Types	09	10	11
Contact Form	1C	1C	1C
Contact Rating			
Maximum switching power	3 VA	3 VA	3 VA
Maximum switching voltage	30 VDC	30 VDC	30 VDC
Maximum switching current	0.2A	0.2A	0.2A
Maximum carry current	0.5A	0.5A	0.5A
Contact Resistance, Initial	150 mΩ	150 mΩ	150 mΩ
Contact Material	Rhodium	Rhodium	Rhodium
Life Expectancy signal level load (ref 10 VDC,10mA)	10x10 ⁶	10x10 ⁶	10x10 ⁶
Timing (at nominal VDC, 25Hz drive, 50% duty cycle with diode suppression)			
Operate time, maximum (Including Bounce)	1.0 ms	1.0 ms	1.0 ms
Release time, maximum	0.5 ms	0.5 ms	0.5 ms
Dielectric Voltage			
Coil to contact	500 VAC	500 VAC	500 VAC
Across contacts	200 VDC	200 VDC	200 VDC
Insulation Resistance (Ω)	100x10 ⁶	100x10 ⁶	100x10 ⁶
Temperature Range	-10°C to +60°C	-10°C to +60°C	-10°C to +60°C
Shock Resistance	30G Min.	30G Min.	30G Min.
Electrical Life at Rated Load	10 ⁶	10 ⁶	10 ⁶

DIMENSIONS

UNIT:mm

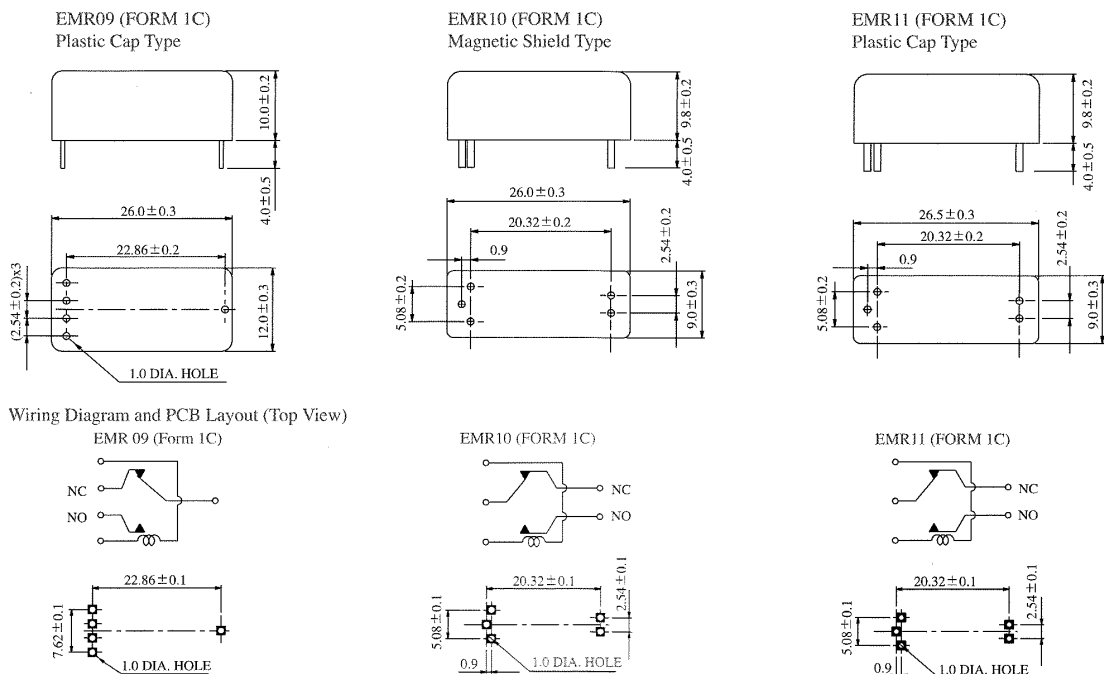


Contacts:

TELCONA AG,Head Office: Höri, Switzerland
 TELCONA AG,Sales Office: Sinsheim, Germany
 TELCONA AG,Sales Office: Lésigny, France

Tel.++41-44-860 2550 Fax.++41-44-860 2822
 Tel.++49-7261-655 388 Fax.++49-7261-655 389
 Tel.++33-1-60 34 28 28 Fax ++33-1-60 34 28 29


info@telcona.com
 info@telcona.de
 info@telcona.fr

Types	12	13	16
Contact Form	1A, 1B	1A, 1B	1A
Contact Rating			 E155181(R)
Maximum switching power	10 VA	10 VA	10 VA
Maximum switching voltage	100 VDC	100 VDC	100 VDC
Maximum switching current	0.5A	0.5A	0.5A
Maximum carry current	1.0A	1.0A	1.0A
Contact Resistance, Initial	150 mΩ	150 mΩ	150 mΩ
Contact Material	Rhodium	Rhodium	Rhodium
Life Expectancy signal level load (ref 10 VDC,10mA)	10x10 ⁶	10x10 ⁶	10x10 ⁶
Timing (at nominal VDC, 25Hz drive, 50% duty cycle with diode suppression)			
Operate time, maximum (Including Bounce)	1.0 ms	1.0 ms	1.0 ms
Release time, maximum	0.5 ms	0.5 ms	0.5 ms
Dielectric Voltage			
Coil to contact	500 VAC	500 VAC	1500 VAC
Across contacts	200 VDC	200 VDC	200 VDC
Insulation Resistance (Ω)	100x10 ⁶	100x10 ⁶	100x10 ⁶
Temperature Range	-10°C to +60°C	-10°C to +60°C	-10°C to +60°C
Shock Resistance	30G Min.	30G Min.	30G Min.
Electrical Life at Rated Load	10 ⁶	10 ⁶	10 ⁶


DIMENSIONS

UNIT:mm


EMR12 (FORM 1A,1B)
Magnetic Shield Type




EMR13 (FORM 1A,1B)
Plastic Cap Type




EMR16 (FORM 1A)
Magnetic Shield Type




Wiring Diagram and PCB Layout (Top View)
(Form 1A)



(FORM 1B)



EMR16 (FORM 1A)



Contacts:

TELCONA AG,Head Office: Höri, Switzerland
 TELCONA AG,Sales Office: Sinsheim, Germany
 TELCONA AG,Sales Office: Lésigny, France

Tel.++41-44-860 2550 Fax.++41-44-860 2822
 Tel.++49-7261-655 388 Fax.++49-7261-655 389
 Tel.++33-1-60 34 28 28 Fax ++33-1-60 34 28 29

info@telcona.com
 info@telcona.de
 info@telcona.fr

Part Number	Nominal Voltage (VDC)	Coil Resistance (Ohms+/-10%)	Nominal Input Power (mW)	Must Operate Voltage (VDC)	Must Release Voltage (VDC)	Maximum Voltage (VDC)
EMR091C03	3	500	18	2.4	0.8	11.0
EMR091C05	5	500	50	3.2	0.8	11.0
EMR091C06	6	500	72	3.8	0.8	11.0
EMR091C08	8	700	92	6.0	0.8	18.0
EMR091C09	9	700	116	6.0	0.8	18.0
EMR091C12	12	1050	138	8.0	0.8	22.0
EMR091C24	24	2080	277	16.0	0.8	32.0
EMR101C03	3	500	18	2.4	0.8	11.0
EMR101C05	5	500	50	3.2	0.8	11.0
EMR101C06	6	500	72	3.8	0.8	11.0
EMR101C08	8	700	92	6.0	0.8	18.0
EMR101C09	9	700	116	6.0	0.8	18.0
EMR101C12	12	1050	138	8.0	0.8	22.0
EMR101C24	24	2080	277	16.0	0.8	32.0
EMR111C03	3	500	18	2.4	0.8	11.0
EMR111C05	5	500	50	3.2	0.8	11.0
EMR111C06	6	500	72	3.8	0.8	11.0
EMR111C08	8	700	92	6.0	0.8	18.0
EMR111C09	9	700	116	6.0	0.8	18.0
EMR111C12	12	1050	138	8.0	0.8	22.0
EMR111C24	24	2080	277	16.0	0.8	32.0
EMR121A03	3	500	18	2.4	0.8	11.0
EMR121A05	5	500	50	3.2	0.8	11.0
EMR121A06	6	500	72	3.8	0.8	11.0
EMR121A08	8	700	92	6.0	0.8	18.0
EMR121A09	9	700	116	6.0	0.8	18.0
EMR121A12	12	1050	138	8.0	0.8	22.0
EMR121A24	24	2080	277	16.0	0.8	32.0
EMR121B03	3	500	18	2.4	0.8	3.6
EMR121B05	5	500	50	3.75	0.8	6.0
EMR121B06	6	500	72	4.5	0.8	7.2
EMR121B08	8	700	92	6.0	0.8	9.6
EMR121B09	9	700	116	6.75	0.8	10.8
EMR121B12	12	1050	138	9.0	0.8	14.4
EMR121B24	24	2080	277	18.0	0.8	28.8
EMR131A03	3	500	18	2.4	0.8	11.0
EMR131A05	5	500	50	3.2	0.8	11.0
EMR131A06	6	500	72	3.8	0.8	11.0
EMR131A08	8	700	92	6.0	0.8	18.0
EMR131A09	9	700	116	6.0	0.8	18.0
EMR131A12	12	1050	138	8.0	0.8	22.0
EMR131A24	24	2080	277	16.0	0.8	32.0

Contacts:

TELCONA AG,Head Office: Höri, Switzerland
TELCONA AG,Sales Office: Sinsheim, Germany
TELCONA AG,Sales Office: Lésigny, France

Tel.++41-44-860 2550 Fax.++41-44-860 2822
Tel.++49-7261-655 388 Fax.++49-7261-655 389
Tel.++33-1-60 34 28 28 Fax ++33-1-60 34 28 29

info@telcona.com
info@telcona.de
info@telcona.fr

Part Number	Nominal Voltage (VDC)	Coil Resistance (Ohms+/-10%)	Nominal Input Power (mW)	Must Operate Voltage (VDC)	Must Release Voltage (VDC)	Maximum Voltage (VDC)
EMR131B03	3	500	18	2.4	0.8	3.6
EMR131B05	5	500	50	3.75	0.8	6.0
EMR131B06	6	500	72	4.5	0.8	7.2
EMR131B08	8	700	92	6.0	0.8	9.6
EMR131B09	9	700	116	6.75	0.8	10.8
EMR131B12	12	1050	138	9.0	0.8	14.4
EMR131B24	24	2080	277	18.0	0.8	28.8
EMR161A03	3	500	18	2.4	0.8	11.0
EMR161A05	5	500	50	3.2	0.8	11.0
EMR161A06	6	500	72	3.8	0.8	11.0
EMR161A08	8	700	92	6.0	0.8	18.0
EMR161A09	9	700	116	6.0	0.8	18.0
EMR161A12	12	1050	138	8.0	0.8	22.0
EMR161A24	24	2080	277	16.0	0.8	32.0
EMR072A03	3	500	18	2.4	0.8	11.0
EMR072A05	5	500	50	3.2	0.8	11.0
EMR072A06	6	500	72	3.8	0.8	11.0
EMR072A08	8	700	92	6.0	0.8	18.0
EMR072A09	9	700	116	6.0	0.8	18.0
EMR072A12	12	1050	138	8.0	0.8	22.0
EMR072A24	24	2080	277	16.0	0.8	32.0
EMR072B03	3	500	18	2.4	0.8	3.6
EMR072B05	5	500	50	3.75	0.8	6.0
EMR072B06	6	500	72	4.5	0.8	7.2
EMR072B08	8	700	92	6.0	0.8	9.6
EMR072B09	9	700	116	6.75	0.8	10.8
EMR072B12	12	1050	138	9.0	0.8	14.4
EMR072B24	24	2080	277	18.0	0.8	28.8
EMR151A03	3	500	18	2.4	0.8	3.6
EMR151A05	5	500	50	4.0	0.8	6.0
EMR151A06	6	500	72	4.8	0.8	7.2
EMR151A08	8	700	92	6.4	0.8	9.6
EMR151A09	9	700	116	7.2	0.8	10.8
EMR151A12	12	1050	138	9.6	0.8	14.4
EMR151A24	24(18)	2080	277	14.4	0.8	28.8
EMR171A03	3	500	18	2.4	0.8	11.0
EMR171A05	5	500	50	3.2	0.8	11.0
EMR171A06	6	500	72	3.8	0.8	11.0
EMR171A08	8	700	92	6.0	0.8	18.0
EMR171A09	9	700	116	6.0	0.8	18.0
EMR171A12	12	1050	138	8.0	0.8	22.0
EMR171A24	24	2080	277	16.0	0.8	32.0

Contacts:

TELCONA AG,Head Office: Höri, Switzerland
TELCONA AG,Sales Office: Sinsheim, Germany
TELCONA AG,Sales Office: Lésigny, France

Tel.++41-44-860 2550 Fax.++41-44-860 2822
Tel.++49-7261-655 388 Fax.++49-7261-655 389
Tel.++33-1-60 34 28 28 Fax ++33-1-60 34 28 29

info@telcona.com
info@telcona.de
info@telcona.fr