

FEATURES

- ❑ 64K x 4 Static RAM with Common I/O
- ❑ Auto-Powerdown™ Design
- ❑ Advanced CMOS Technology
- ❑ High Speed — to 15 ns maximum
- ❑ Low Power Operation
Active: 210 mW typical at 35 ns
Standby: 5 mW typical
- ❑ Data retention at 2 V for Battery Backup Operation
- ❑ DESC SMD No.
5962-88681 — L7C194
- ❑ Available 100% Screened to MIL-STD-883, Class B
- ❑ Plug Compatible with IDT 71258/61298 and Cypress CY7C194/195
- ❑ Package Styles Available:
 - 24/28-pin Plastic DIP
 - 24/28-pin Ceramic DIP
 - 24/28-pin Plastic SOJ
 - 28-pin Ceramic LCC

DESCRIPTION

The **L7C194** and **L7C195** are high-performance, low-power CMOS static RAMs. The storage cells are organized as 65,536 words by 4 bits per word. Data In and Data Out signals share I/O pins. The **L7C194** has a single active-low Chip Enable. The **L7C195** has a single Chip Enable and an Output Enable. These devices are available in four speeds with maximum access times from 15 ns to 35 ns.

Inputs and outputs are TTL compatible. Operation is from a single +5 V power supply. Power consumption is 210 mW (typical) at 35 ns. Dissipation drops to 50 mW (typical) when the memory is deselected.

Two standby modes are available. Proprietary Auto-Powerdown™ circuitry reduces power consumption automatically during read or write accesses which are longer than the

minimum access time, or when the memory is deselected. In addition, data may be retained in inactive storage with a supply voltage as low as 2 V. The **L7C194** and **L7C195** consume only 150 μ W (typical) at 3 V, allowing effective battery backup operation.


The **L7C194** and **L7C195** provide asynchronous (unlocked) operation with matching access and cycle times. An active-low Chip Enable and a three-state I/O bus simplify the connection of several chips for increased capacity.

Memory locations are specified on address pins A0 through A15. For the **L7C194**, reading from a designated location is accomplished by presenting an address and driving $\overline{\text{CE}}$ LOW while $\overline{\text{WE}}$ remains HIGH. For the **L7C195**, $\overline{\text{CE}}$ and $\overline{\text{OE}}$ must be LOW. The data in the addressed memory location will then appear on the Data Out pins within one access time. The output pins stay in a high-impedance state when $\overline{\text{CE}}$ or $\overline{\text{OE}}$ is HIGH, or $\overline{\text{WE}}$ is LOW.

Writing to an addressed location is accomplished when the active-low $\overline{\text{CE}}$ and $\overline{\text{WE}}$ inputs are LOW. Either signal may be used to terminate the write operation. Data In and Data Out signals have the same polarity.

Latchup and static discharge protection are provided on-chip. The **L7C194** and **L7C195** can withstand an injection current of up to 200 mA on any pin without damage.

L7C194/195 BLOCK DIAGRAM

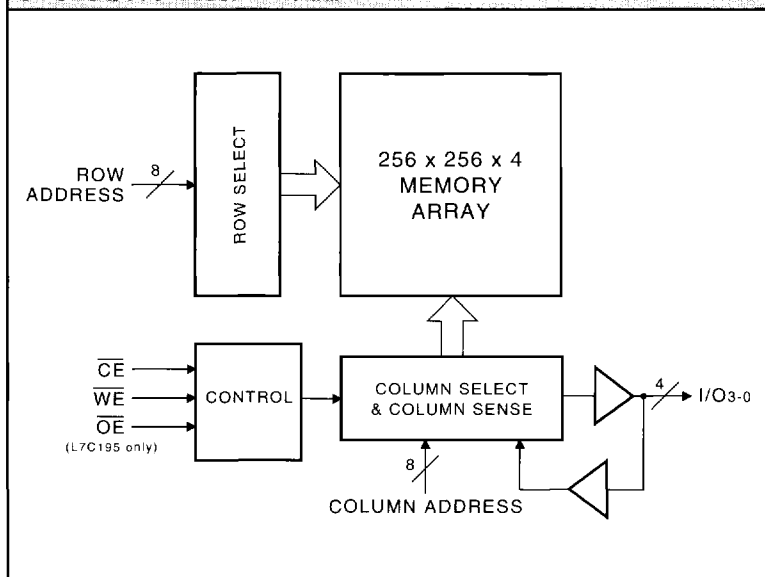

MAXIMUM RATINGS Above which useful life may be impaired (Notes 1, 2)

Storage temperature	–65°C to +150°C
Operating ambient temperature	–55°C to +125°C
V _{CC} supply voltage with respect to ground	–0.5 V to +7.0 V
Input signal with respect to ground	–3.0 V to +7.0 V
Signal applied to high impedance output	–3.0 V to +7.0 V
Output current into low outputs	25 mA
Latchup current	> 200 mA

OPERATING CONDITIONS To meet specified electrical and switching characteristics

Mode	Temperature Range (Ambient)	Supply Voltage
Active Operation, Commercial	0°C to +70°C	4.5 V ≤ V _{CC} ≤ 5.5 V
Active Operation, Industrial	–40°C to +85°C	4.5 V ≤ V _{CC} ≤ 5.5 V
Active Operation, Military	–55°C to +125°C	4.5 V ≤ V _{CC} ≤ 5.5 V
Data Retention, Commercial	0°C to +70°C	2.0 V ≤ V _{CC} ≤ 5.5 V
Data Retention, Industrial	–40°C to +85°C	2.0 V ≤ V _{CC} ≤ 5.5 V
Data Retention, Military	–55°C to +125°C	2.0 V ≤ V _{CC} ≤ 5.5 V

ELECTRICAL CHARACTERISTICS Over Operating Conditions (Note 5)

Symbol Parameter Test Condition			L7C194/195			Unit
			Min	Typ	Max	
V _{OH}	Output High Voltage	V _{CC} = 4.5 V, I _{OH} = –4.0 mA	2.4			V
V _{OL}	Output Low Voltage	I _{OL} = 8.0 mA			0.4	V
V _{IH}	Input High Voltage		2.2		V _{CC} +0.3	V
V _{IL}	Input Low Voltage	(Note 3)	–3.0		0.8	V
I _{Ix}	Input Leakage Current	Ground ≤ V _{IN} ≤ V _{CC}	–10		+10	μA
I _{OZ}	Output Leakage Current	(Note 4)	–10		+10	μA
I _{CC2}	V _{CC} Current, TTL Inactive	(Note 7)		10	20	mA
I _{CC3}	V _{CC} Current, CMOS Standby	(Note 8)		1	3	mA
I _{CC4}	V _{CC} Current, Data Retention	V _{CC} = 3.0 V (Note 9)		50	200	μA
C _{IN}	Input Capacitance	Ambient Temp = 25°C, V _{CC} = 5.0 V			5	pF
C _{OUT}	Output Capacitance	Test Frequency = 1 MHz (Note 10)			7	pF

Symbol Parameter Test Condition			L7C194/195-				
			35	25	20	15	Unit
I _{CC1}	V _{CC} Current, Active	(Note 6)	75	100	125	160	mA


SWITCHING CHARACTERISTICS Over Operating Range

READ CYCLE Notes 5, 11, 12, 22, 23, 24 (ns)


Symbol	Parameter	L7C194/195--							
		35		25		20		15	
		Min	Max	Min	Max	Min	Max	Min	Max
t _{AVAV}	Read Cycle Time	35		25		20		15	
t _{AVQV}	Address Valid to Output Valid (Notes 13, 14)		35		25		20		15
t _{AXQX}	Address Change to Output Change	3		3		3		3	
t _{CLQV}	Chip Enable Low to Output Valid (Notes 13, 15)		35		25		20		15
t _{CLQZ}	Chip Enable Low to Output Low Z (Notes 20, 21)	3		3		3		3	
t _{CHQZ}	Chip Enable High to Output High Z (Notes 20, 21)		15		10		8		8
t _{OLQV}	Output Enable Low to Output Valid		15		12		10		8
t _{OLQZ}	Output Enable Low to Output Low Z (Notes 20, 21)	0		0		0		0	
t _{OHQZ}	Output Enable High to Output High Z (Notes 20, 21)		10		10		8		5
t _{PU}	Input Transition to Power Up (Notes 10, 19)	0		0		0		0	
t _{PD}	Power Up to Power Down (Notes 10, 19)		35		25		20		20
t _{CHVL}	Chip Enable High to Data Retention (Note 10)	0		0		0		0	

4


READ CYCLE — ADDRESS CONTROLLED Notes 13, 14

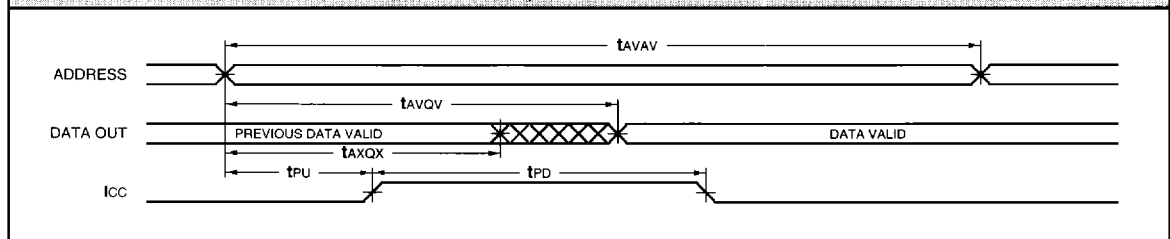

READ CYCLE — $\overline{CE}/\overline{OE}$ CONTROLLED Notes 13, 15

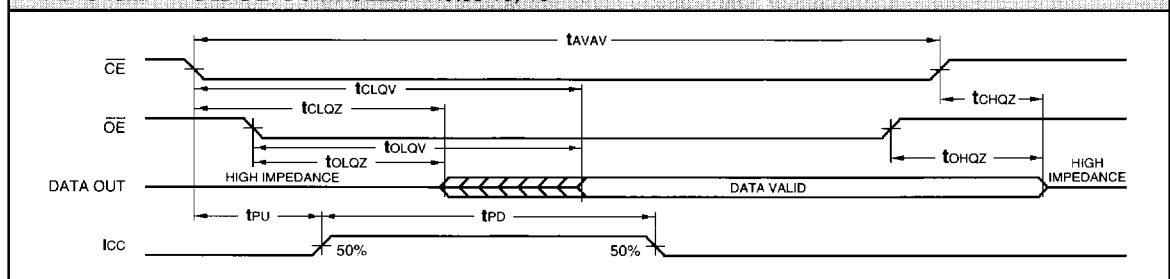

DATA RETENTION Note 9

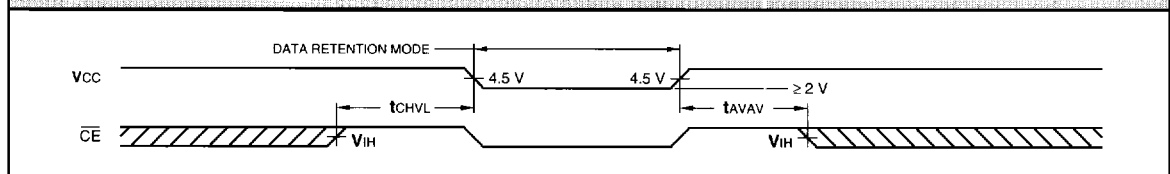


SWITCHING CHARACTERISTICS Over Operating Range


WRITE CYCLE Notes 5, 11, 12, 22, 23, 24 (ns)

Symbol	Parameter	L7C194/195—							
		35		25		20		15	
		Min	Max	Min	Max	Min	Max	Min	Max
tAVAV	Write Cycle Time	25		20		20		15	
tCLEW	Chip Enable Low to End of Write Cycle	25		15		15		12	
tAVBW	Address Valid to Beginning of Write Cycle	0		0		0		0	
tAVEW	Address Valid to End of Write Cycle	25		15		15		12	
tEWAX	End of Write Cycle to Address Change	0		0		0		0	
twLEW	Write Enable Low to End of Write Cycle	20		15		15		12	
tdVEW	Data Valid to End of Write Cycle	15		10		10		7	
tEWDX	End of Write Cycle to Data Change	0		0		0		0	
tWHQZ	Write Enable High to Output Low Z (Notes 20, 21)	0		0		0		0	
twLQZ	Write Enable Low to Output High Z (Notes 20, 21)		10		7		7		5

WRITE CYCLE — $\overline{\text{WE}}$ CONTROLLED Notes 16, 17, 18, 19

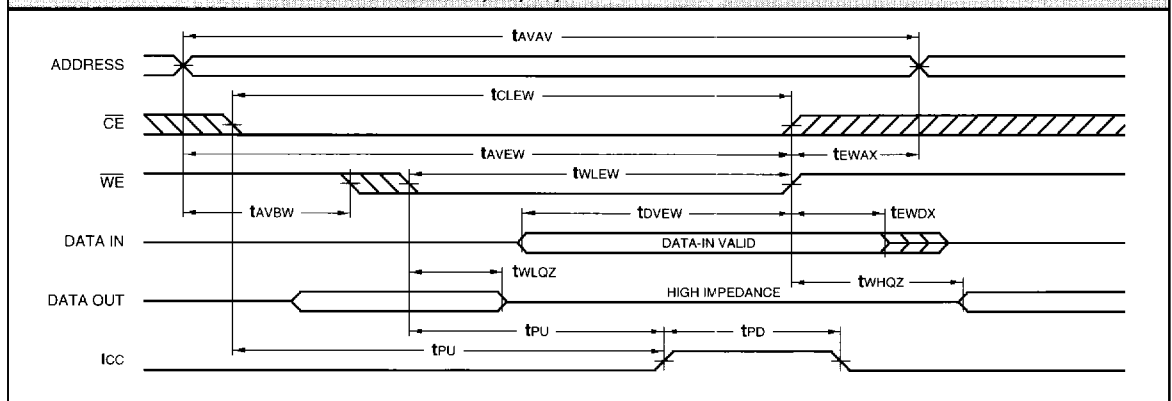

WRITE CYCLE — $\overline{\text{CE}}$ CONTROLLED Notes 16, 17, 18, 19

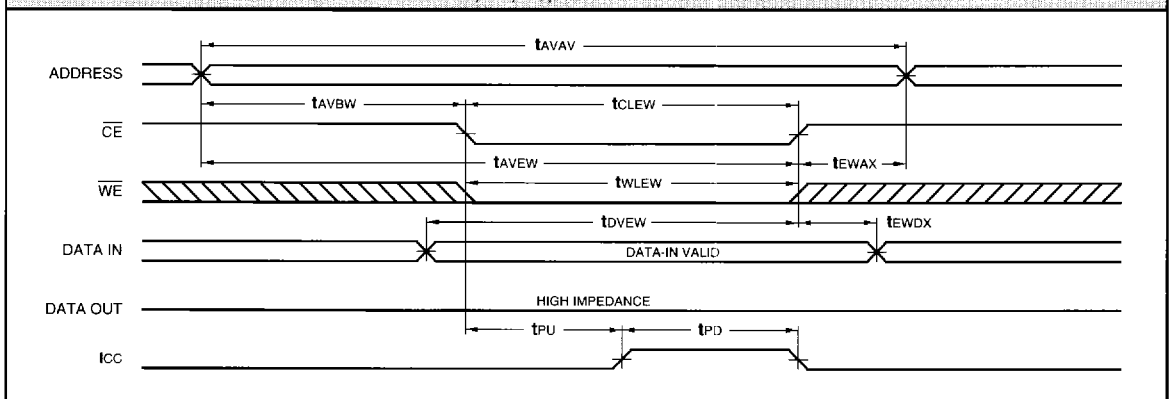

NOTES

1. Maximum Ratings indicate stress specifications only. Functional operation of these products at values beyond those indicated in the Operating Conditions table is not implied. Exposure to maximum rating conditions for extended periods may affect reliability of the tested device.

2. The products described by this specification include internal circuitry designed to protect the chip from damaging substrate injection currents and accumulations of static charge. Nevertheless, conventional precautions should be observed during storage, handling, and use of these circuits in order to avoid exposure to excessive electrical stress values.

3. This product provides hard clamping of transient undershoot. Input levels below ground will be clamped beginning at -0.6 V . A current in excess of 100 mA is required to reach -2.0 V . The device can withstand indefinite operation with inputs as low as -3 V subject only to power dissipation and bond wire fusing constraints.

4. Tested with $\text{GND} \leq \text{VOUT} \leq \text{VCC}$. The device is disabled, i.e., $\overline{\text{CE}} = \text{VCC}$.

5. A series of normalized curves is available to supply the designer with typical DC and AC parametric information for Logic Devices Static RAMs. These curves may be used to determine device characteristics at various temperatures and voltage levels.

6. Tested with all address and data inputs changing at the maximum cycle rate. The device is continuously enabled for writing, i.e., $\overline{\text{CE}} \leq \text{VIL}$, $\overline{\text{WE}} \leq \text{VIL}$. Input pulse levels are 0 to 3.0 V .

7. Tested with outputs open and all address and data inputs changing at the maximum read cycle rate. The device is continuously disabled, i.e., $\overline{\text{CE}} \geq \text{VIH}$.

8. Tested with outputs open and all address and data inputs stable. The device is continuously disabled, i.e., $\overline{\text{CE}} = \text{VCC}$. Input levels are within 0.2 V of VCC or GND .

9. Data retention operation requires that VCC never drop below 2.0 V . $\overline{\text{CE}}$ must be $\geq \text{VCC} - 0.2\text{ V}$. All other inputs must meet $\text{VIN} \geq \text{VCC} - 0.2\text{ V}$ or $\text{VIN} \leq 0.2\text{ V}$ to ensure full powerdown. For low power version (if applicable), this requirement applies only to $\overline{\text{CE}}$ and $\overline{\text{WE}}$; there are no restrictions on data and address.

10. These parameters are guaranteed but not 100% tested.

11. Test conditions assume input transition times of less than 3 ns , reference levels of 1.5 V , output loading for specified IOL and IOH plus 30 pF (Fig. 1a), and input pulse levels of 0 to 3.0 V (Fig. 2).

12. Each parameter is shown as a minimum or maximum value. Input requirements are specified from the point of view of the external system driving the chip. For example, tAVEW is specified as a minimum since the external system must supply at least that much time to meet the worst-case requirements of all parts. Responses from the internal circuitry are specified from the point of view of the device. Access time, for example, is specified as a maximum since worst-case operation of any device always provides data within that time.

13. $\overline{\text{WE}}$ is high for the read cycle.

14. The chip is continuously selected ($\overline{\text{CE}}$ low).

15. All address lines are valid prior to or coincident with the $\overline{\text{CE}}$ transition to active.

16. The internal write cycle of the memory is defined by the overlap of $\overline{\text{CE}}$ active and $\overline{\text{WE}}$ low. All three signals must be active to initiate a write. Any signal can terminate a write by going inactive. The address, data, and control input setup and hold times should be referenced to the signal that becomes active last or becomes inactive first.

17. If $\overline{\text{WE}}$ goes low before or concurrent with the latter of $\overline{\text{CE}}$ going active, the output remains in a high impedance state.

18. If $\overline{\text{CE}}$ goes inactive before or concurrent with $\overline{\text{WE}}$ going high, the output remains in a high impedance state.

19. Powerup from ICC2 to ICC1 occurs as a result of any of the following conditions:

- Falling edge of $\overline{\text{CE}}$.
- Falling edge of $\overline{\text{WE}}$ ($\overline{\text{CE}}$ active).
- Transition on any address line ($\overline{\text{CE}}$ active).
- Transition on any data line ($\overline{\text{CE}}$ and $\overline{\text{WE}}$ active).

The device automatically powers down from ICC1 to ICC2 after tPD has elapsed from any of the prior conditions. This means that power dissipation is dependent on only cycle rate, and is not on Chip Select pulse width.

20. At any given temperature and voltage condition, output disable time is less than output enable time for any given device.

21. Transition is measured $\pm 200\text{ mV}$ from steady state voltage with specified loading in Fig. 1b. This parameter is sampled and not 100% tested.

22. All address timings are referenced from the last valid address line to the first transitioning address line.

23. $\overline{\text{CE}}$ or $\overline{\text{WE}}$ must be inactive during address transitions.

24. This product is a very high speed device and care must be taken during testing in order to realize valid test information. Inadequate attention to setups and procedures can cause a good part to be rejected as faulty. Long high inductance leads that cause supply bounce must be avoided by bringing the VCC and ground planes directly up to the contactor fingers. A $0.01\text{ }\mu\text{F}$ high frequency capacitor is also required between VCC and ground. To avoid signal reflections, proper terminations must be used.

FIGURE 1a.

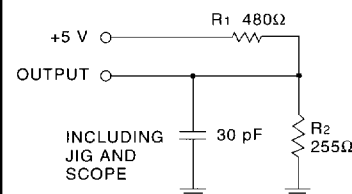


FIGURE 1b.



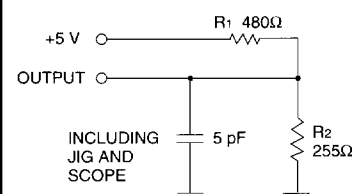


FIGURE 2.




L7C194 — ORDERING INFORMATION

24-pin — 0.3" wide




24-pin — 0.3" wide



Speed	Plastic DIP (P2)	Ceramic DIP (C1)	Plastic SOJ (W1)
0°C to +70°C — COMMERCIAL SCREENING			
25 ns	L7C194PC25	L7C194CC25	L7C194WC25
20 ns	L7C194PC20	L7C194CC20	L7C194WC20
15 ns	L7C194PC15	L7C194CC15	L7C194WC15
-40°C to +85°C — COMMERCIAL SCREENING			
25 ns	L7C194PI25		L7C194WI25
20 ns	L7C194PI20		L7C194WI20
15 ns	L7C194PI15		L7C194WI15
-55°C to +125°C — COMMERCIAL SCREENING			
35 ns		L7C194CM35	
25 ns		L7C194CM25	
20 ns		L7C194CM20	
-55°C to +125°C — MIL-STD-883 COMPLIANT			
35 ns		L7C194CMB35	
25 ns		L7C194CMB25	
20 ns		L7C194CMB20	

L7C194 — ORDERING INFORMATION

28-pin

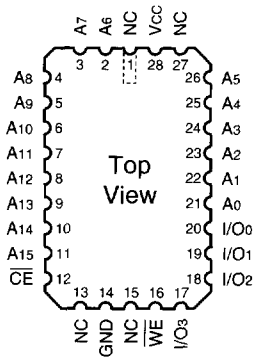


4


Speed	Ceramic Leadless Chip Carrier (K5)	
0°C to +70°C — COMMERCIAL SCREENING		
25 ns	L7C194KC25	
20 ns	L7C194KC20	
15 ns	L7C194KC15	
-40°C to +85°C — COMMERCIAL SCREENING		
25 ns		
20 ns		
15 ns		
-55°C to +125°C — COMMERCIAL SCREENING		
35 ns	L7C194KM35	
25 ns	L7C194KM25	
20 ns	L7C194KM20	
-55°C to +125°C — MIL-STD-883 COMPLIANT		
35 ns	L7C194KMB35	
25 ns	L7C194KMB25	
20 ns	L7C194KMB20	

L7C195 — ORDERING INFORMATION

28-pin — 0.3" wide

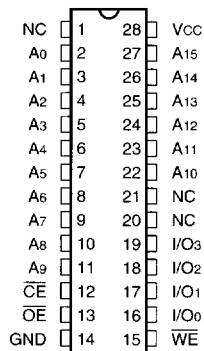

28-pin — 0.3" wide



Speed	Plastic DIP (P10)	Ceramic DIP (C5)	Plastic SOJ (W2)
0°C to +70°C — COMMERCIAL SCREENING			
25 ns	L7C195PC25	L7C195CC25	L7C195WC25
20 ns	L7C195PC20	L7C195CC20	L7C195WC20
15 ns	L7C195PC15	L7C195CC15	L7C195WC15
-40°C to +85°C — COMMERCIAL SCREENING			
25 ns	L7C195PI25		L7C195WI25
20 ns	L7C195PI20		L7C195WI20
15 ns	L7C195PI15		L7C195WI15
-55°C to +125°C — COMMERCIAL SCREENING			
35 ns		L7C195CM35	
25 ns		L7C195CM25	
20 ns		L7C195CM20	
-55°C to +125°C — MIL-STD-883 COMPLIANT			
35 ns		L7C195CMB35	
25 ns		L7C195CMB25	
20 ns		L7C195CMB20	