

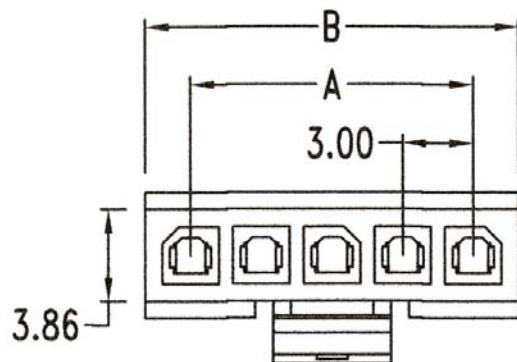
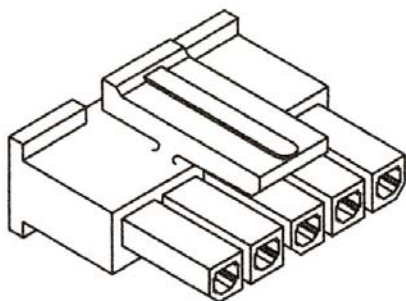


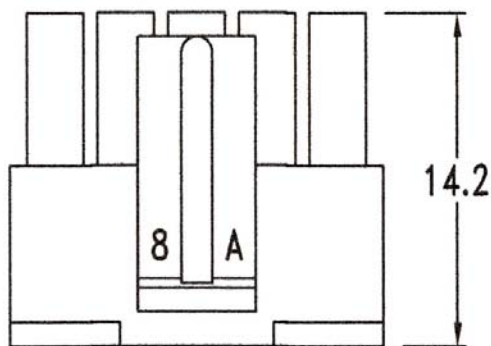

SPECIFICATIONS

Current Rating:	#20:5A, #22:5A, #24:4A, #26:3A, #28:2A, #30:1A
Voltage Rating:	250V AC, DC
Housing Material:	Nylon 66, UL94V-0
Insulation Resistance:	1000MQ Min.
Contact Plating:	Tin-plated Brass
Withstanding:	1500V AC
Temperature Rise:	30°C Max.
Temperature Range:	-40°C to +105°C



Current rating	
AWG	Amps
20	5
22	5
24	4
26	3
28	2
30	1

Dimensions					
Circuits	A	B	Circuits	A	B
2	3.0	7.0	8	21.0	25.0
3	6.0	10.0	9	24.0	28.0
4	9.0	13.0	10	27.0	31.0
5	12.0	16.0	11	30.0	34.0
6	15.0	19.0	12	33.0	37.0
7	18.0	22.0			

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
A	O/T Increase	4/25/16	Jeff	Approved	Howard	4/19/01
				Checked	Lizzy	4/19/01
				Drawn	Tina	4/19/01
				0.0 ± 0.35 0.00 ± 0.20 Angles ± 3'		
				UNIT: mm		



Central Components Manufacturing

440 Lincoln Blvd., Middlesex, New Jersey 08846
Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-3025-XXS**

Description: .118 Single Row Receptacle Housing