

VERTICALLY POLARISED PANEL ANTENNA GSM900 VP/85/16 TYPE 1648


- 85 DEGREE SECTOR
- SUPRESSED SIDELOBES

Vertically polarised panel antennas from Thales have been designed to provide high RF performance, with highly suppressed sidelobes to minimise interference with adjacent cells.

A number of models provide variations in both gain and downtilt to exactly suit the required cell coverage. Superior design coupled with advanced manufacturing techniques guarantee consistent product quality & performance.

TECHNICAL SPECIFICATION

Frequency	870-960 MHz
Gain	16 dBi
VSWR	1.3:1
Horizontal Beamwidth	85°
Vertical Beamwidth	8°
Fixed Electrical Downtilt	4°
Upper Sidelobe Suppression	> -19 dB
Front-to-Back Ratio	>25 dB
Power Rating	500W
ConnectorS	7/16" DIN (socket on back)
Impedance	50Ω
Dimensions (LxWxD)	2330 x 220 x 135 mm
Temperature Range	- 55°C to + 65°C
Wind Loading	729N @ 45m/s
Operational Wind Speed	45 m/s
Survival Wind Speed	56 m/s
Lightning Protection	DC grounded
Weight	12.5kg
Bracket Size	To suit pole 48-115mm
Bracket Downtilt	0 -6° in 1 steps

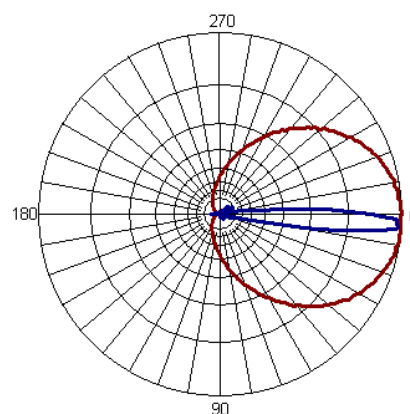

THALES ANTENNAS LTD

First Avenue, Millbrook Trading Estate, Southampton SO15 0LJ United Kingdom
Tel: +44 (0) 2380 705705, Fax: +44 (0) 2380 701122, email: sales@racal-antennas.co.uk, www.thalesantennas.com
Thales reserve the right to vary in detail from the description and specification in this publication. Issue: 6/01/1