

Large-area InGaAs Photodiodes

ETX 500 and ETX 1000 Series



The Lumentum ETX 500T and ETX 1000T series large-area InGaAs PIN photodetectors have photosensitive areas with diameters of 500 and 1000 μm , respectively. These photodiodes offer high responsivity in the 800–1700 nm spectrum, and are designed for use in instrumentation, sensing, and range-finding applications.

The detectors feature high sensitivity and linear spectral responsivity over a broad range of input powers. When operating in photovoltaic mode, a noise current density of 10 $\text{fA}/\text{Hz}^{1/2}$ is typical at room temperature. When reverse-biased for greater bandwidth, a noise floor of 60 $\text{fA}/\text{Hz}^{1/2}$ at -5 V is typical. Linear spectral response results from the low series resistance of the photodiodes.

The ETX 500T and ETX 1000T series are optimal for the high-speed, differential mode measurements common in precision optical power meters, optical fiber identifiers, and optical loss test sets.

The ETX 500T and ETX1000T photodiodes are packaged in hermetically-sealed TO cans.


Key Features

- High responsivity in near infrared spectrum
- Low dark current for high accuracy
- High shunt resistance
- Linear over wide range of input optical power
- Active diameters of 0.5 and 1 mm

Applications

- Optical power meters
- Optical fiber identifiers
- Optical attenuation test sets
- Near infrared spectroscopy
- Infrared range finders

Dimensions Diagram: ETX 500T, ETX 1000T
(Specifications in mm unless otherwise noted.)

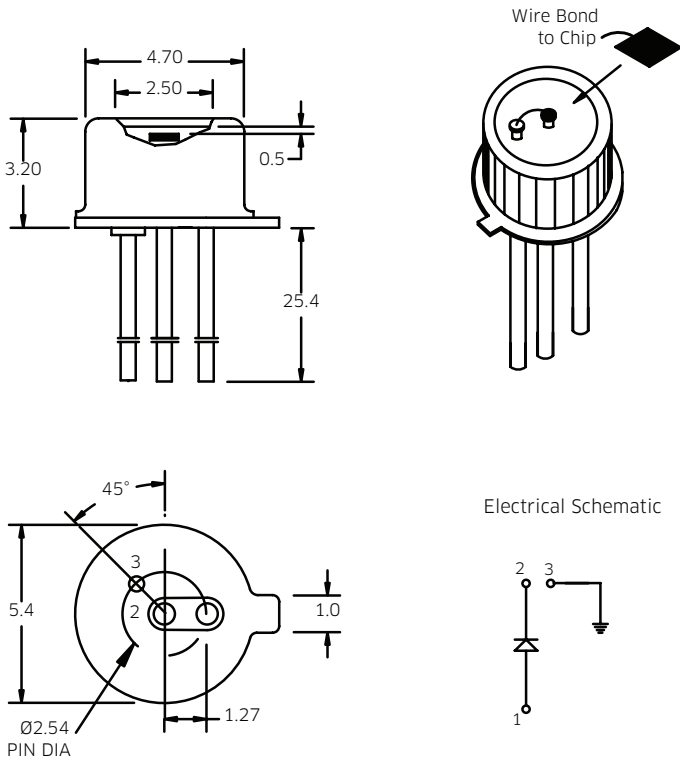

Specifications

Parameter		ETX 500T	ETX 1000T
Electrical and Optical Specifications			
Conditions		25 °C, $V_R = 5\text{ V}$	25 °C, $V_R = 5\text{ V}$
Active diameter	Typical	0.5 mm	1.0 mm
Responsivity at 850 nm	Minimum Typical	0.10 A/W 0.20 A/W	0.10 A/W 0.20 A/W
Responsivity at 1300 nm	Minimum Typical	0.80 A/W 0.90 A/W	0.80 A/W 0.90 A/W
Responsivity at 1500 nm	Typical	0.95 A/W	0.95 A/W
Dark current	Typical Maximum	12 nA 100 nA	50 nA 400 nA
Shunt resistance ¹	Minimum Typical	5.0 M Ω 250 M Ω	2.0 M Ω 50 M Ω
Linearity ²	Typical	$\pm 0.15\text{ dB}$	$\pm 0.15\text{ dB}$
Total capacitance ³	Typical Maximum	35 pF 50 pF	100 pF 150 pF
Bandwidth ⁴	Typical	140 MHz	35 MHz
Maximum Ratings			
Reverse voltage	Typical	20 V	20 V
Reverse current ⁵	Typical	10 mA	10 mA
Forward current ⁶	Typical	10 mA	10 mA
Power dissipation	Typical	100 mW	100 mW
Operating temperature		-40 to 85 °C	-40 to 85 °C
Storage temperature		-40 to 85 °C	-40 to 85 °C

1. $V_R = 10\text{ mV}$
2. For ETX 500T and ETX 1000T, to 9 dBm
3. For ETX 500T and ETX 1000T, $V_R = 0\text{ V}$
4. -3 dB point into a 50 Ω load
5. Under reverse bias, current at which device may be damaged
6. Under forward bias, current at which device may be damaged

Ordering Information

For more information on this or other products and their availability, please contact your local Lumentum account manager or Lumentum directly at customer.service@lumentum.com.

Sample: ETX 500T

Product Code	Description
ETX 500T	0.5 mm diode in T046 package
ETX 1000T	1.0 mm diode in T046 package

Precaution for Use

Glass windows must be cleaned with 99 percent pure, reagent grade Isopropanol.

ESD Protection is imperative. Use of grounding straps, antistatic mats, and other standard ESD protective equipment is recommended when handling or testing any InGaAs PIN or any other junction photodiode.

Quality and Reliability

Lumentum maintains a strict quality control program throughout the design and manufacturing process of its photodetectors. All products are evaluated against MIL-STD 883C, GR468, or custom specifications. Lumentum purges each photodiode for 18 hours at 125°C, with bias applied. Long-term life-testing has indicated an expected lifetime of at least 107 hours for the large area InGaAs photodiodes ETX 500 and ETX 1000T. Contact Lumentum for details of specific qualification tests performed on the large-area InGaAs photodiode series.



North America
Toll Free: 844 810 LITE (5483)

Outside North America
Toll Free: 800 000 LITE (5483)

China
Toll Free: 400 120 LITE (5483)

© 2015 Lumentum Operations LLC
Product specifications and descriptions in this document are subject to change without notice.