


## EPR1623SE

- Optimized for Level One LXT6155 for use with 75 Ω Coaxial Cable
- Robust design allows for toughest soldering processes
- Operating Temp. -40°C to +85°C
- 1500 Vrms Isolation


### Electrical Parameters @ 25°C

OCL ( $\mu\text{H Typ.}$ )	Leakage Inductance (nH Max.)	Interwinding Capacitance (pF Max.)	Insertion Loss (dB Max.)	Return Loss (dB Min.)	DCR ( $\Omega$ Max.)
@ 100 KHz, 0.1 Vrms	@ 100 KHz, .1 Vrms	@ 100 KHz, .1 Vrms	10-320 MHz	8-240 MHz	@ 100 KHz, .1 Vrms
30	100	25	-3.0	-15	0.30

### Schematics

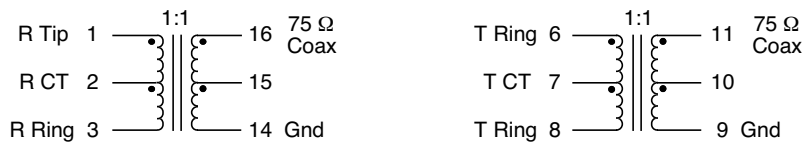

### Package

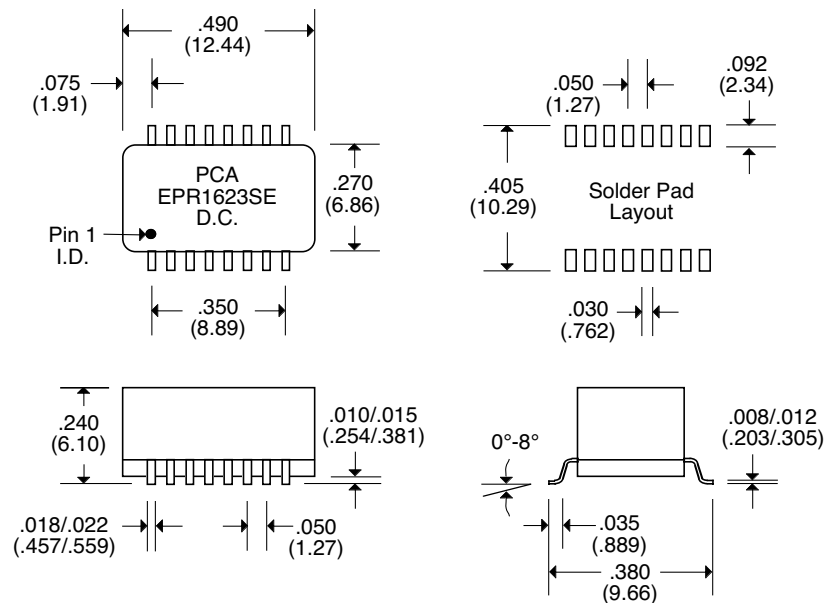

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25