THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #		STUD SIZE	DIMENSIONS mm				
PREFIX	PK		A ±0,51	W ±0,25	C ±0,38	M ±0,51	H ±0,25
PMV1-3RB	-C -M	M3	20,83 (.82)	5,84 (.23)	5,59 (.22)	17,78 (.70)	3,30 (.13)
PMV1-4RB	-C -M	M4	23,11 (.91)	7,87 (.31)	7,37 (.29)	19,05 (.75)	4,57 (.18)
PMV1-5RB	-C -M	M5	23,11 (.91)	8,89 (.35)	7,37 (.29)	19,05 (.75)	5,33 (.21)
PMV1-6RB	-C -M	M6	28,19 (1.11)	10,92 (.43)	10,69 (.42)	22,35 (.88)	6,86 (.27)

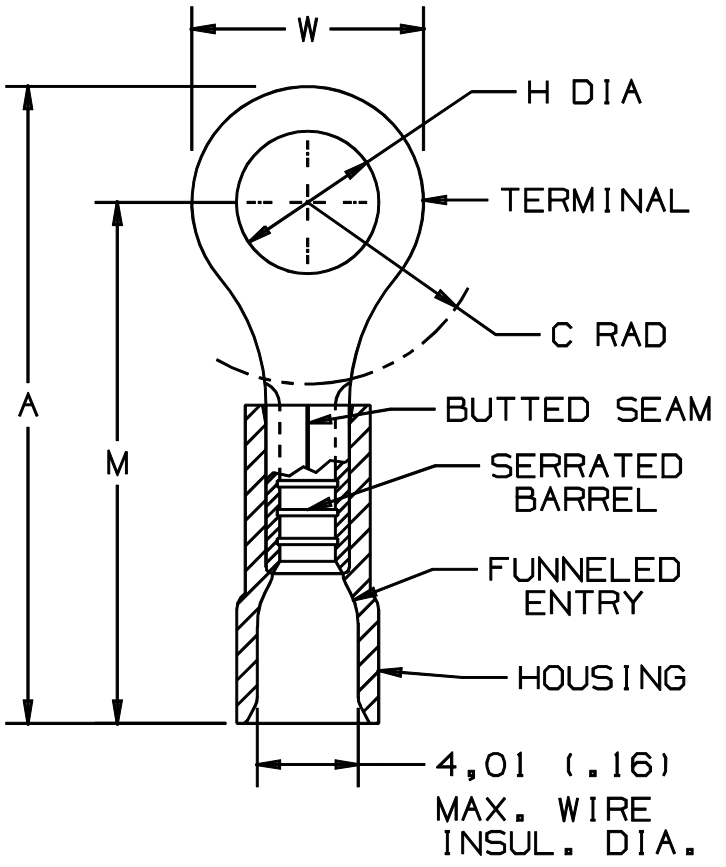

NOTES :

1. USED FOR :
   A. 600 V MAX. VOLTAGE RATING
   B. 105°C (221°F) MAX. TEMP. RATING
   C. 0,5-1,5mm² (#22-18 AWG), STRANDED COPPER WIRE

2. MATERIAL :
   A. STAMPING - 0,81mm (.03) THK COPPER, TIN PLATED
   B. HOUSING - RED VINYL

3. DIMENSIONS IN BRACKETS ARE IN INCHES

4. PACKAGE QTY:
   A. STD: C=100
   B. BULK: M=1000

5. WIRE STRIP LENGTH: $7,9\ ^{+,8}_{-0}$ $(5/16\ ^{+1/32}_{-0})$

6. INSTALLATION TOOLS: REF. DWGS. A41522, A41523, A41524, A41525

A41432_01

REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM
01	10/97	TM		CHANGED DECIMAL POINTS TO COMMAS			
00	7/90	BK	RS	RELEASED	00687	LA	KS

PANDUIT CORP. TINLEY PARK, ILLINOIS

2 PC. VINYL INSULATED METRIC RINGS
0,5-1,5mm² BARREL

DRAWN BY	CHK'D	SCALE	DRAWING NO.
BDK	RLS	NONE	A41432